
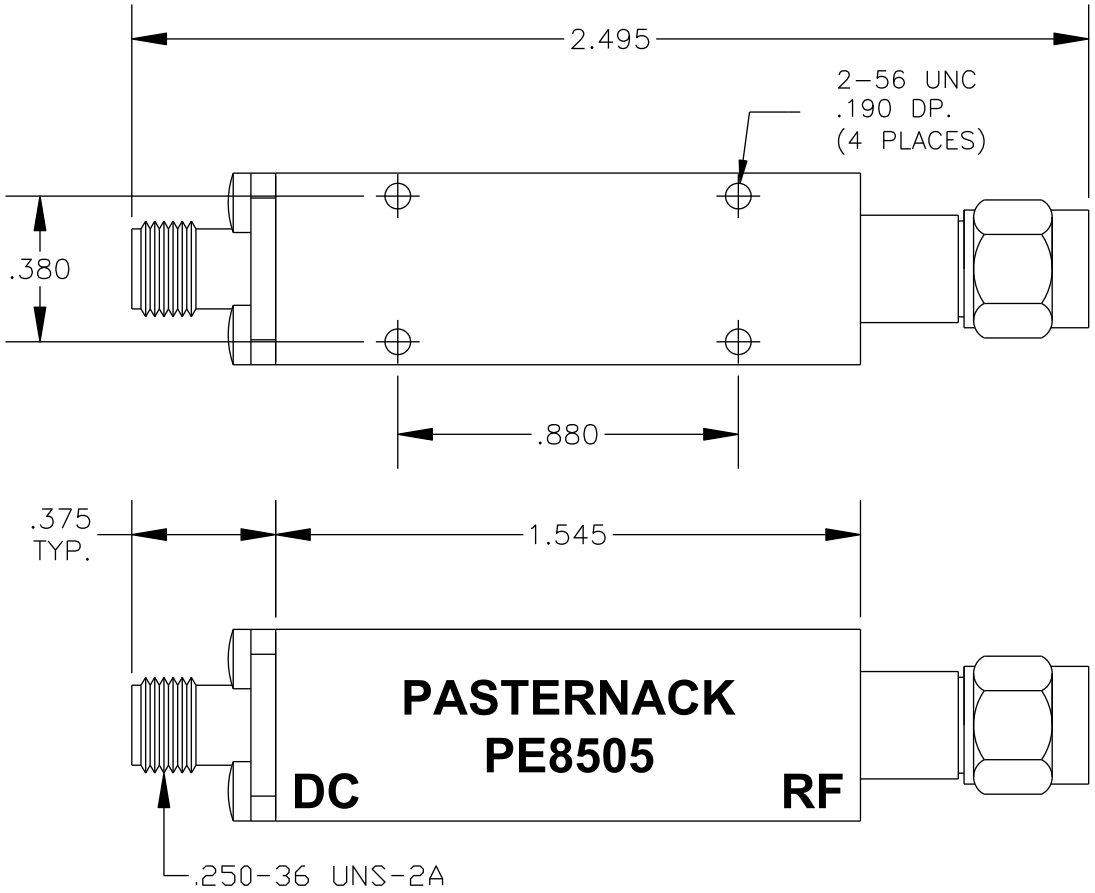




SPECIFICATIONS

FREQUENCY RANGE:	1 TO 2 GHz
DC INPUT:	+28 VDC
DC CURRENT	
Typical:	<10mA
Maximum:	25mA
NOISE OUTPUT:	30-35
NOISE OUTPUT VARIATION	
vs. temp:	<0.01 dB/°C
vs. VDC:	<0.1 dB/%V
BIAS CONNECTOR:	SMA FEMALE
OPERATING TEMP:	-55°C to +85°C
FLATNESS dB:	± 1
NOISE OUTPUT RISE AND FALL TIME:	< 1 MICRO SECOND

PASTERNACK ENTERPRISES, INC.
P.O BOX 16759, IRVINE, CA 92623
PHONE (949) 261-1920 FAX (949) 261-7451
WEB ADDRESS: www.pasternack.com
E-MAIL ADDRESS: sales@pasternack.com
COAXIAL & FIBER OPTICS

PASTERNACK ENTERPRISES®
ESTABLISHED 1972

DWG TITLE
PE8505

DES. SMA MALE TO SMA FEMALE HIGH OUTPUT NOISE GENERATOR

REV. C	FSCM NO. 53919	CAD FILE 050108	SCALE N/A	SIZE A	127

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES.