


Specification for monolithic crystal filter:

MQF 45.0-0750/17

1. General

1.1. Package:

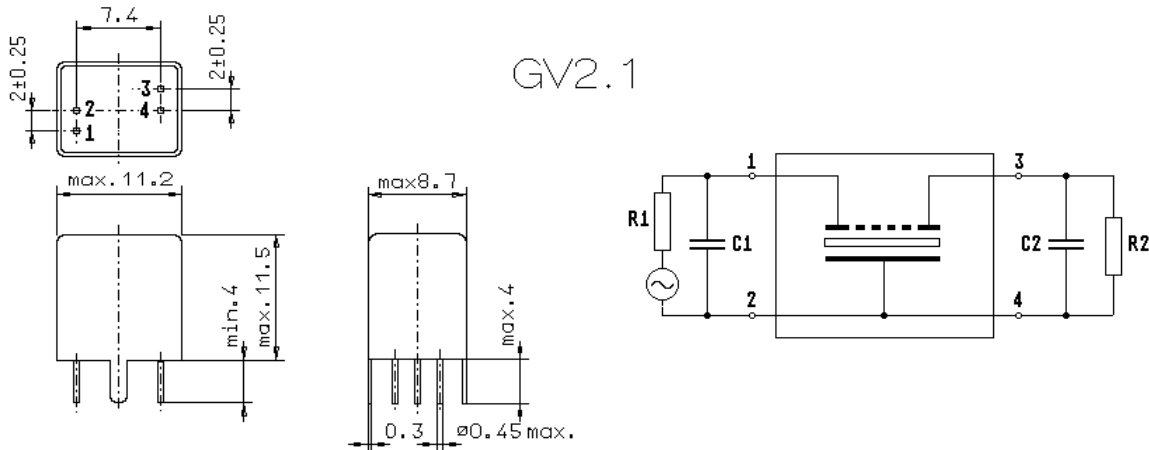

- | | |
|-----------------------------------|------------------|
| 1.2. Type name: | MQF 45.0-0750/17 |
| 1.3. Number of poles: | 8 |
| 1.4. Operating temperature range: | -25°C to +80°C |
| 1.5. Storage temperature range: | -35°C to +85°C |

2. Electric values

- | | |
|---------------------------------------|----------|
| 2.1. Nominal centre frequency f_0 : | 45.0 MHz |
|---------------------------------------|----------|

2.2. Pass band

- | | |
|---|------------------------------------|
| 2.2.1. Bandwidth between 3 dB - frequencies: | $\geq f_0 \pm 3.75$ kHz |
| 2.2.2. Ripple: | ≤ 2.0 dB at $f_0 \pm 3.0$ kHz |
| 2.2.3. Insertion loss:
(measured on smallest attenuation in pass band) | ≤ 7.0 dB |

2.3. Stop band

- | | |
|---------------------------|--------------|
| 2.3.1. $f_0 \pm 12.5$ kHz | ≥ 65 dB |
| 2.3.2. $f_0 \pm 25$ kHz | ≥ 80 dB |
| 2.3.3. $f_0 \pm 910$ kHz | ≥ 80 dB |

- | | |
|--|------------------------|
| 2.4. Terminating impedance (input and output): | $350 \Omega // 5.0$ pF |
|--|------------------------|

- | | |
|-------------|---|
| 3. Marking: | manufacturer, date code
45.0-0750/17 |
|-------------|---|

- | | |
|----------------------------|---|
| 4. Environment conditions: | Corresponding to Vectron standard CF001 |
|----------------------------|---|

Edited by: _____ date: _____ name: _____