
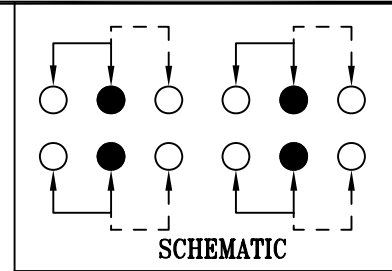


P.C.B LAYOUT

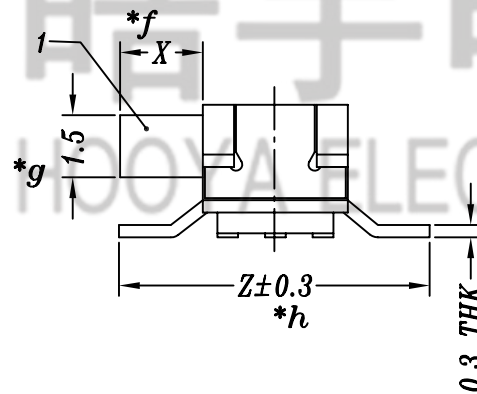

SPECIFICATION

1. Rating: DC 12V 0.3A
2. Travel: 2 mm
3. Function: 4P2T
4. Contact Resistance: <math>\leq 70\text{m}\Omega\text{MAX}</math>
5. Operating Force:  $200\pm 80\text{gf}$
6. Life test: 10,000 cycles

KNOB  $X=2, 3, 4, 5\text{mm}$

TERMINAL  $Z=6.0, 7.5, 10.5\text{mm}$

				TOLERANCE UNLESS SPECIFIED							
				UP TO 5mm: $\pm 0.1$	ANGULAR	1					
				ABOVE 5mm: $\pm 0.2$	$\pm 1^\circ$	NO	DATE	REVISIONS		BY	APPD
5	MS-42D02 TERMINAL	BRASS	12	Ag PLATED	TITLE: MINI SLIDE SWITCH		UNIT : MM	ROHS COMPLIANT	DWN		
4	MS-42D02 CONTACT	BERYLLUM	4	Ag PLATED	MODEL: MK-42D20G2-B T7.5		SCALE: 5:1	CHK'D			
3	CASE	PA6T/LCP	1	BLACK	<b>HAOYU(HONGKONG)LIMITED</b> 皓宇(香港)有限公司		APPD				
2	MK-42D02 COVER	SUS	1	Ni PLATED			PRO.AGL:		REV : A		
1	MK-42D02 KNOB	PA6T	1	BLACK							
NO.	PART NAME	MATERIAL	QTY	FINISHING							