

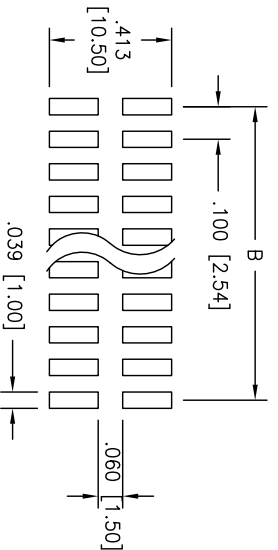
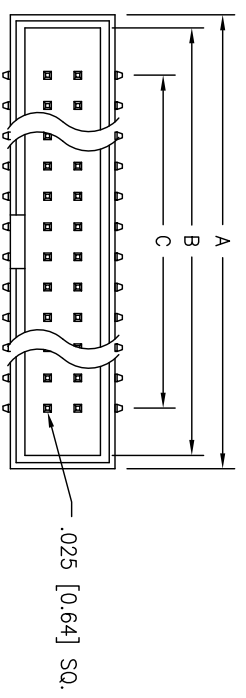


Rev	AWO #	Description	Date	Appr
-		RELEASED	3/30/10	

APPROVED: _____ TITLE: _____
 DATE: _____



RECOMMENDED PCB LAYOUT

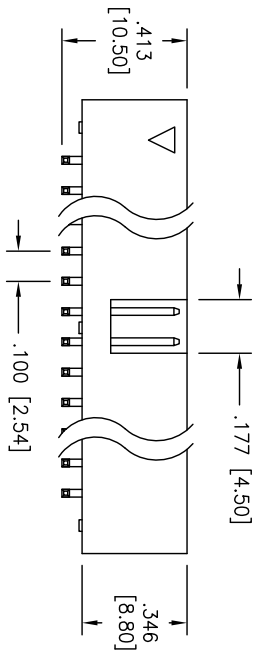

A = .100 [2.54] X No. of Positions / 2 + .300 [7.62]
 B = .100 [2.54] X No. of Positions / 2 + .212 [5.40]
 C = .100 [2.54] X No. of Spaces

SPECIFICATIONS:
Material:
 Insulator: Nylon 6T, rated UL 94V-0
 Insulator color: Black
 Contacts: Brass
 Plating:
 Gold Flash over Nickel underplate overall.
Electrical:
 Operating voltage: 250 VAC max
 Current rating: 3 Amps max
 Contact resistance: 20 mohms max
 Insulation resistance: 5000 Mohms min @ 500 VDC
 Dielectric withstanding voltage: 1000 VAC for 1 minute
Temperature Rating:
 Operating temperature: -40°C to +105°C
Environmental:
 Lead free, RoHS compliant.
 Recommended soldering temp: 260°C for 5 sec.



UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE MM [INCHES]
 TOLERANCES: EXCEPT AS NOTED
 INCHES ± .10
 .XX ± .020
 .XXX ± .015
 ØXX ± .015
 ØXXX ± .010

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

DRAWN	DY	3/30/10	SIZE	PART NO.	REV.
CHECKED			X	BHR-XX-VU-SMT	-
APPROVED			REF:	SCALE: NTS	SHEET 1 OF 1

TITLE: BOX HEADER, VERTICAL, SMT