

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION - ,- .
© COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST
AD	00

REVISIONS


P	LTR	DESCRIPTION	DATE	DWN	APVD
	N1	REVISED PER ECO-11-004587	11MAR11	RK	HMR

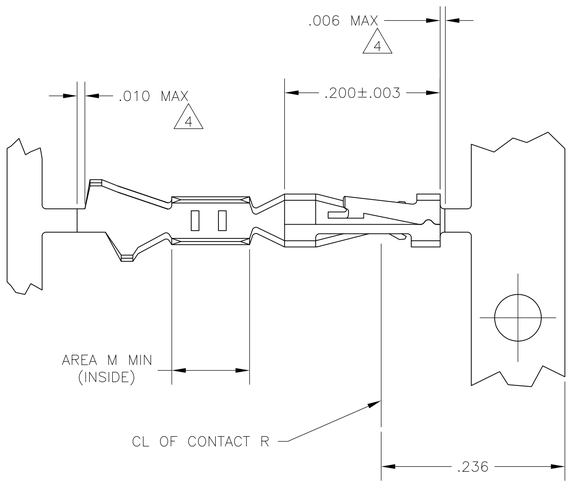





SECTION A-A
SCALE 20:1

1. .000100 MIN BRIGHT TIN-LEAD OVER .000050 MIN NICKEL ON ENTIRE CONTACT
2. .000050 MIN NICKEL ON ENTIRE CONTACT; .000015 MIN GOLD ON CONTACT AREA; .000050 MIN BRIGHT TIN-LEAD ON AREA M.
3. .000050 MIN NICKEL ON ENTIRE CONTACT; .000030 MIN GOLD ON CONTACT AREA; .000050 MIN BRIGHT TIN-LEAD ON AREA M.
4. LOOSE PIECE CUT-OFF DIMENSION.
5. .000015 MIN GOLD ON CONTACT AREA, .000050 MIN TIN ON AREA M, ALL OVER .000050 MIN NICKEL ON ENTIRE CONTACT.
6. .000030 MIN GOLD ON CONTACT AREA, .000050 MIN TIN ON AREA M, ALL OVER .000050 MIN NICKEL ON ENTIRE CONTACT.
8. .000100 MIN TIN OVER .000050 MIN NICKEL ON ENTIRE CONTACT

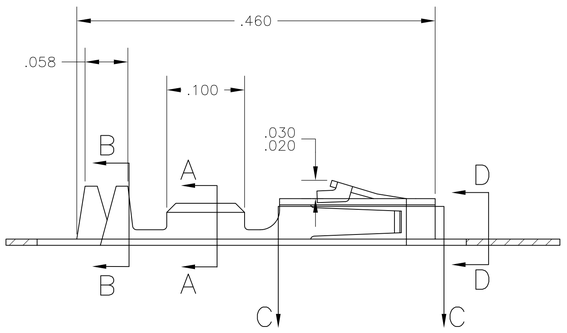




SECTION B-B
INSULATION RANGE .025-.060
SCALE 20:1

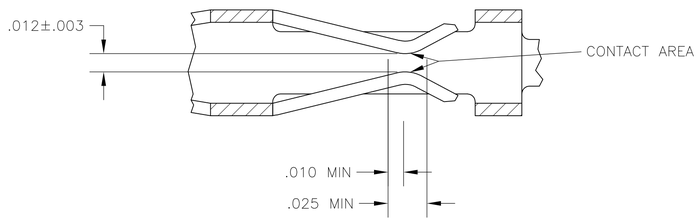

SECTION C-C
SCALE 20:1



SECTION D-D
SCALE 20:1

	LOOSE PIECE	8 REF	5-104481-6
	STRIP	8	5-104481-2
	LOOSE PIECE	6 REF	1-104481-3
	LOOSE PIECE	5 REF	1-104481-2
	STRIP	6	1-104481-1
	STRIP	5	1-104481-0
OBSOLETE	LOOSE PIECE		104481-9
	LOOSE PIECE	3 REF	104481-8
	LOOSE PIECE	2 REF	104481-7
	LOOSE PIECE	1 REF	104481-6
OBSOLETE	STRIP		104481-5
	STRIP	3	104481-4
	STRIP	2	104481-3
	STRIP	1	104481-2
	REMARKS	FINISH	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± -
1 PLC ± -
2 PLC ± -
3 PLC ± .005
4 PLC ± -
ANGLES ± -

MATERIAL: PHOSPHOR BRONZE
FINISH: SEE TABLE

DWN C.OBERMAN 5-10-89
CHK K. HELM 5-12-89
APVD R.ELICKER 5-12-89
PRODUCT SPEC 108-1472
APPLICATION SPEC 114-25038
WEIGHT -

TE Connectivity

NAME
CONTACT, CRIMP SNAP-IN
AMPMODU SHORT POINT, 28-32 AWG
-

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A1	00779	C-104481	-

CUSTOMER DRAWING | SCALE 10:1 | SHEET 1 OF 1 | REV N1