
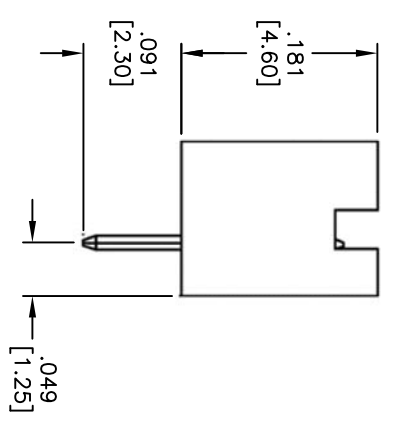
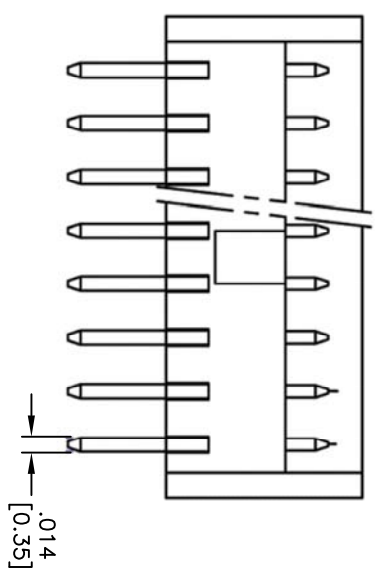
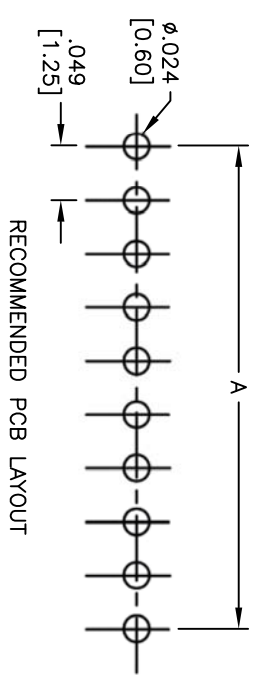


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-	9507	RELEASED	4/29/09	
A		UPDATE DRAWING	10/13/14	HR/NP

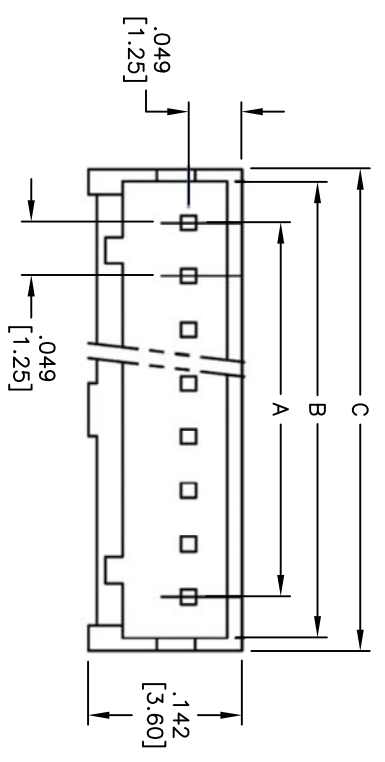

SPECIFICATIONS:

Material: Insulator: Nylon 66, rated UL 94V-0
 Insulator color: Beige
 Contacts: Brass
 Plating: Tin over Copper underplate overall
 Electrical: Operating voltage: 250 VDC max
 Current rating: AC/DC 1 Amp max
 Contact resistance: 30 mohms max
 Insulation resistance: 1,000 Mohms min @ 500 VDC
 Dielectric withstanding voltage: 500 VAC for 1 minute
 Temperature Rating: Operating temperature: -25°C to +85°C
 Environmental: Lead free, RoHS compliant

Positions: 2 thru 15, 20, 25, 30
 A = .049 [1.25] x No. of Spaces
 B = .049 [1.25] x No. of Positions + .026 [0.65]
 C = .049 [1.25] x No. of Positions + .049 [1.25]

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED

INCHES	HOLES
.X ± .10	ØX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXX ± .010

APPROVALS: _____ DATE: _____

DRAWN	DY	4/29/09
CHECKED		
APPROVED		

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .049 [1.25] SHRROUDED HEADER STRAIGHT, PCB

SIZE	PART NO.	REV.
X	125SH-C-XX-TS	A

REF: S00099T SCALE: NTS SHEET 1 OF 1



6 5 4 3 2 1