



SAW Components

Data Sheet K 3562 M





SAW Components

K 3562 M

IF Filter for Quasi/Split Sound Applications

38,00 MHz

Data Sheet

Standard

- B/G
- D/K
- I


Features

- TV IF filter for quasi/split sound applications (separate picture and sound channel)
- Picture channel with Nyquist slope and sound suppression, symmetrical output
- Customized group delay predistortion
- Sound channel with pass band for sound carriers between 31,5 MHz and 32,5 MHz

Terminals

- Tinned CuFe alloy


Plastic package **SIP5K**

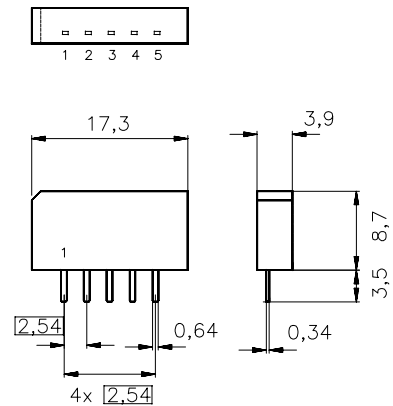

Dimensions in mm, approx. weight 1,0 g

Pin configuration

- 1 Input
- 2 Chip carrier - ground
- 3 Output - sound
- 4 Output - picture
- 5 Output - picture



Type	Ordering code	Marking and package according to	Packing according to
K 3562 M	B39380-K3562-M201	C61157-A1-A15	F61074-V8067-Z000

Maximum ratings

Operating temperature range	T_A	-25/+65	°C	
Storage temperature range	T_{stg}	-40/+85	°C	
DC voltage	V_{DC}	5	V	between any terminals
AC voltage	V_{pp}	10	V	between any terminals


SAW Components
K 3562 M
IF Filter for Quasi/Split Sound Applications
38,00 MHz
Data Sheet
Characteristics of picture channel

Reference temperature: $T_A = 25\text{ °C}$
 Terminating source impedance: $Z_S = 50\ \Omega$
 Terminating load impedance: $Z_L = 2\text{ k}\Omega \parallel 3\text{ pF}$

		min.	typ.	max.	
Insertion attenuation					
	α				
Reference level for the following data	36,50 MHz	14,3	15,8	17,3	dB
Relative attenuation					
	α_{rel}				
Picture carrier	38,00 MHz	5,2	6,2	7,2	dB
Color carrier	33,57 MHz	0,3	1,3	2,3	dB
Sound carrier	31,50 MHz	30,0	39,0	—	dB
	32,50 MHz	25,0	32,0	—	dB
Adjacent picture carrier	30,00 MHz	36,0	46,0	—	dB
	31,00 MHz	30,0	44,0	—	dB
Adjacent sound carrier	39,50 MHz	35,0	42,0	—	dB
	40,00 MHz	35,0	43,0	—	dB
Lower sidelobe	25,00 ... 30,00 MHz	38,0	44,0	—	dB
Upper sidelobe	40,00 ... 45,00 MHz	37,0	43,0	—	dB
Reflected wave signal suppression					
1,2 μ s ... 6,0 μ s after main pulse (test pulse 250 ns, carrier frequency 36,50 MHz)		42,0	50,0	—	dB
Feedthrough signal suppression					
1,2 μ s ... 1,1 μ s before main pulse (test pulse 250 ns, carrier frequency 36,50 MHz)		50,0	56,0	—	dB
Group delay predistortion					
(reference frequency 38,00 MHz)					
	$\Delta\tau$				
	35,00 MHz	—	-40	—	ns
	34,50 MHz	—	-60	—	ns
	34,00 MHz	—	-95	—	ns
	33,50 MHz	—	-130	—	ns
Impedance at 36,50 MHz					
	Input: $Z_{IN} = R_{IN} \parallel C_{IN}$	—	1,4 \parallel 20,8	—	k Ω \parallel pF
	Output: $Z_{OUT} = R_{OUT} \parallel C_{OUT}$	—	2,2 \parallel 3,7	—	k Ω \parallel pF
Temperature coefficient of frequency					
	TC_f	—	-72	—	ppm/K



SAW Components

K 3562 M

IF Filter for Quasi/Split Sound Applications

38,00 MHz

Data Sheet

Characteristics of sound channel

Reference temperature: $T_A = 25\text{ °C}$
 Terminating source impedance: $Z_S = 50\ \Omega$
 Terminating load impedance: $Z_L = 2\text{ k}\Omega \parallel 3\text{ pF}$

		min.	typ.	max.	
Insertion attenuation					
	α				
Reference level for the following data	31,50 MHz	12,3	13,8	15,3	dB
Relative attenuation					
	α_{rel}				
Sound carrier	32,50 MHz	0,8	1,8	2,8	dB
Picture carrier	38,00 MHz	35,0	45,0	—	dB
Color carrier	33,57 MHz	16,0	20,0	—	dB
Adjacent picture carrier	30,00 MHz	26,0	32,0	—	dB
	31,00 MHz	—	3,0	—	dB
Adjacent sound carrier	39,50 MHz	36,0	46,0	—	dB
	40,00 MHz	36,0	48,0	—	dB
Lower sidelobe	25,00 ... 30,00 MHz	26,0	32,0	—	dB
Upper sidelobe	38,00 ... 45,00 MHz	32,0	38,0	—	dB
Impedance at 31,50 MHz					
	Output: $Z_{OUT} = R_{OUT} \parallel C_{OUT}$	—	3,5 \parallel 3,3	—	k Ω \parallel pF
Temperature coefficient of frequency					
	TC_f	—	-72	—	ppm/K



SAW Components



K 3562 M

IF Filter for Quasi/Split Sound Applications

38,00 MHz

Data Sheet

Frequency response of picture channel

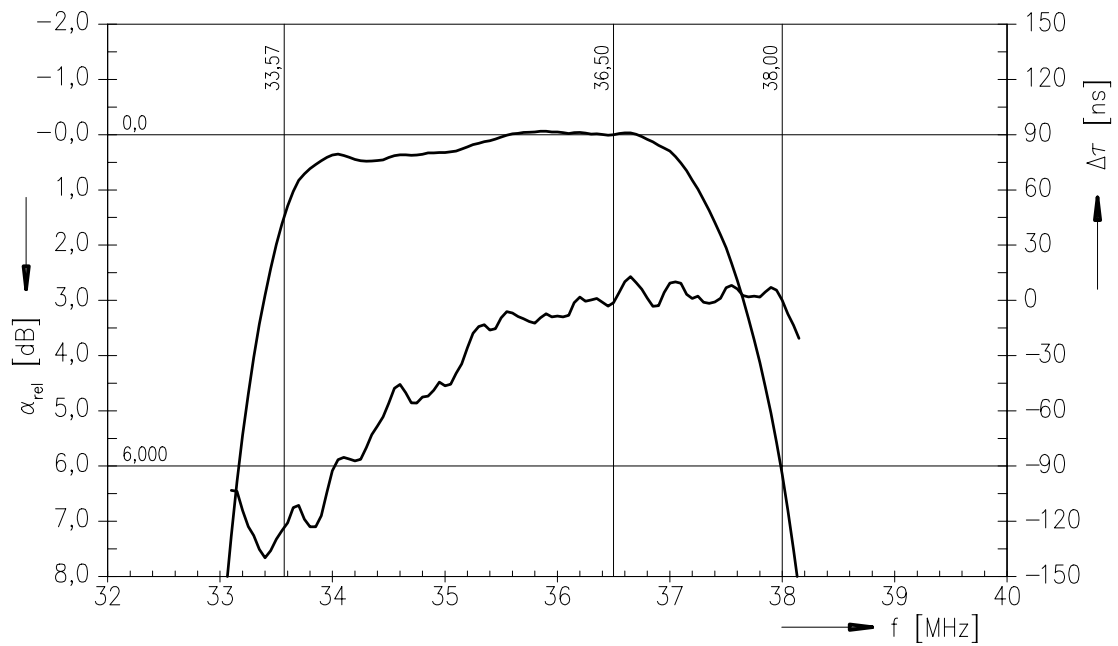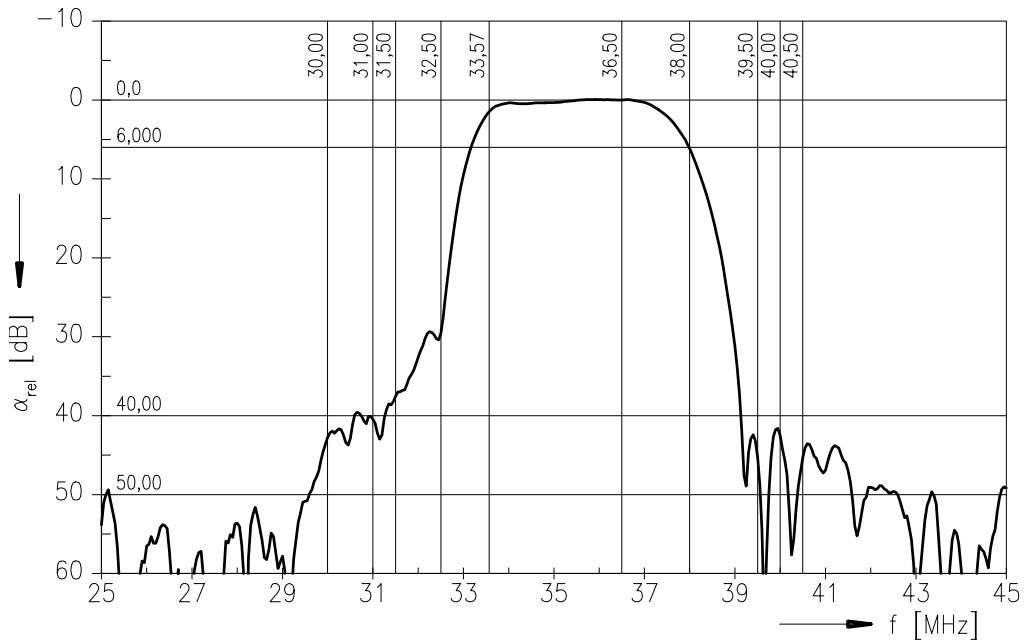



SAW Components


K 3562 M

IF Filter for Quasi/Split Sound Applications


38,00 MHz

Data Sheet

Frequency response of picture channel

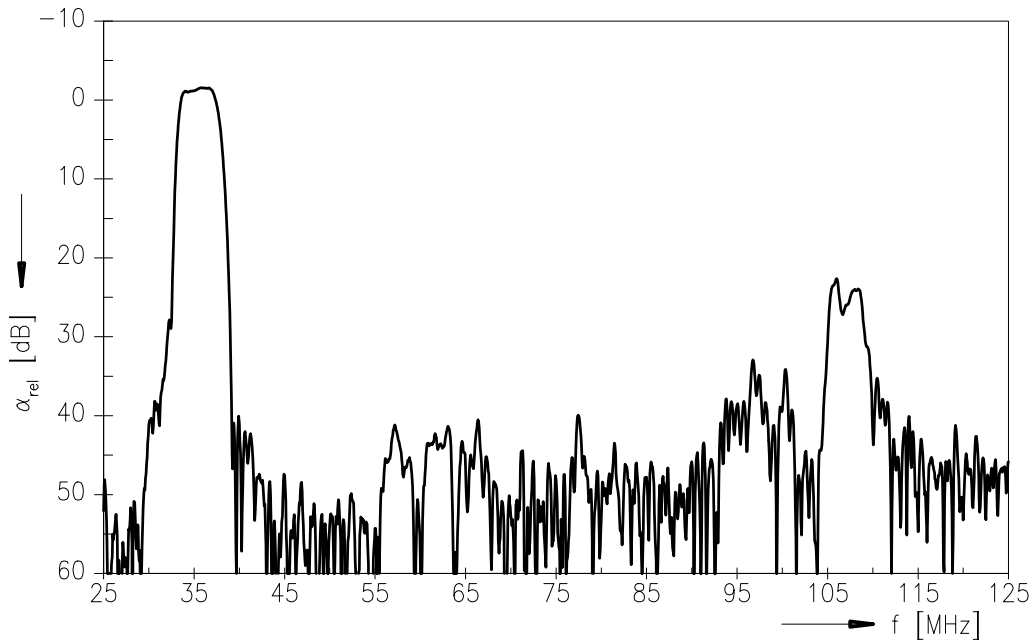

Time domain response of picture channel

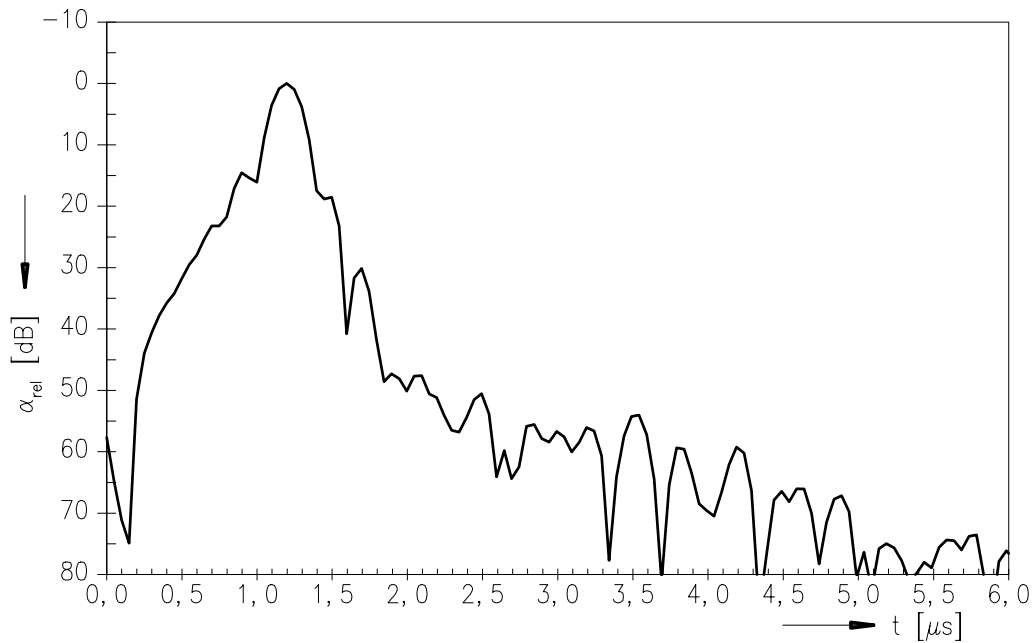



SAW Components


K 3562 M

IF Filter for Quasi/Split Sound Applications

38,00 MHz

Data Sheet

Frequency response of sound channel

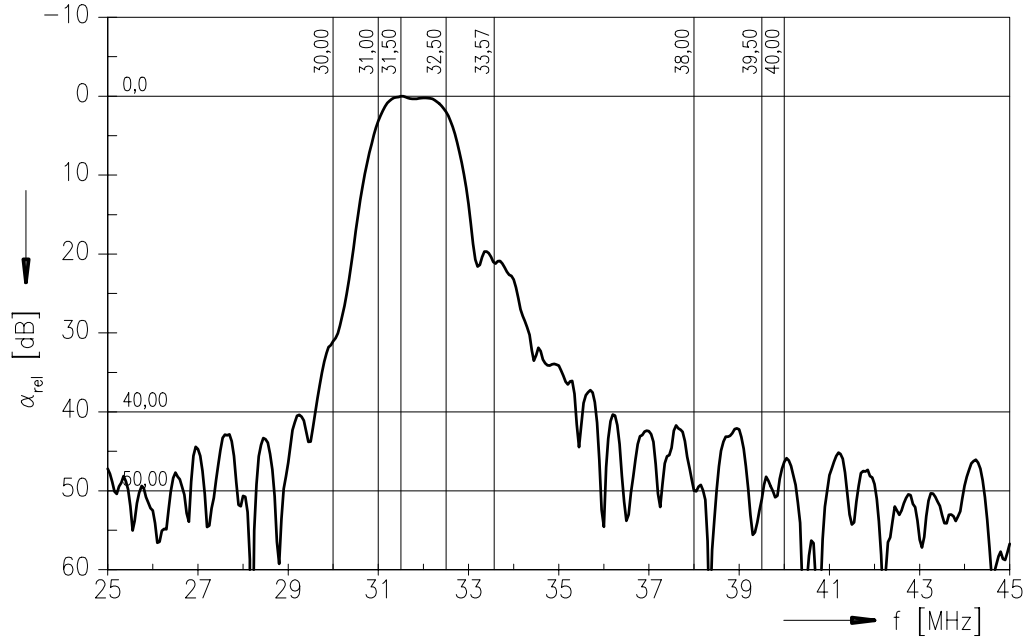



SAW Components

K 3562 M

IF Filter for Quasi/Split Sound Applications

38,00 MHz

Data Sheet

Published by EPCOS AG

Surface Acoustic Wave Components Division, SAW CE MM PD

P.O. Box 80 17 09, 81617 Munich, GERMANY

© EPCOS AG 2003. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.