

KR Electronics, Inc.

General Description


KR 2355-50-BNC is a 50 Hz active notch filters. Other notch frequencies can be specified. Contact factory for details.

Features

- 50 Hz Active notch filter
- 3 dB BW 7 Hz maximum
- No adjustments necessary


Typical Performance

REF LEVEL /DIV MARKER 50.000Hz
 0.000dB 5.000dB MAG(UDF) -52.347dB

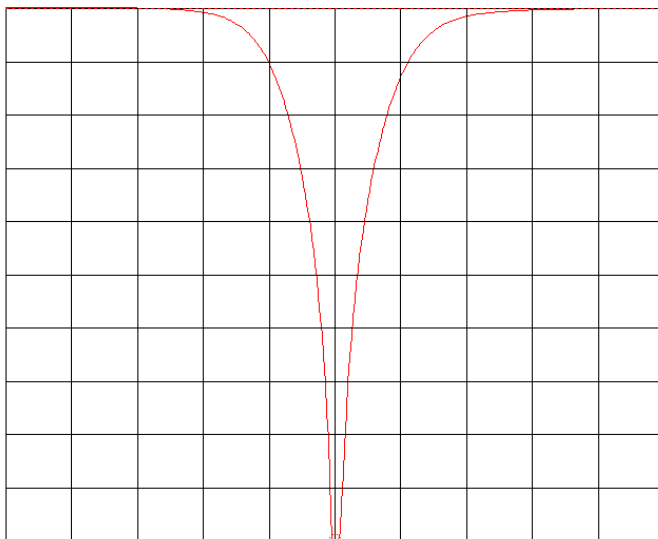

CENTER 50.000Hz SPAN 20.000Hz
 AMPTD -5.0dBm

REF LEVEL /DIV MARKER 100 000.000Hz
 0.000dB 5.000dB MAG(UDF) 0.215dB

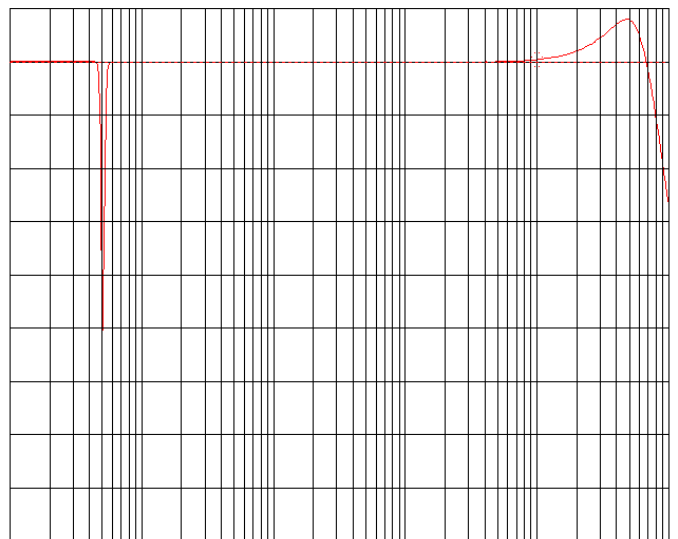

10 100 1K 10K 100K 1M
 START 10.000Hz STOP 1 000 000.000Hz

KR Electronics, Inc.
 91 Avenel Street
 Avenel, NJ 07001


Web www.krfilters.com
 Email sales@krfilters.com
 Phone (732) 636-1900
 Fax (732) 636-1982

KR Electronics, Inc.

Specifications

Parameter	Specification	
Filter type	Notch	
Notch Frequency (Fo)	50 Hz	
Max 3 dB Bandwidth	7 Hz	Upper passband limit to approx. 100 KHz
Attenuation at Fo	> 40 dB (typically >60 dB)	
Gain	0 dB ± 0.2 dB	
Max Input Voltage	± 8 V	
Supply Voltage	± 15 Vdc max	
Supply Current	26 mA max (17.5 mA typ)	
Operating Temperature	0° C to 50° C	

Physical Dimensions

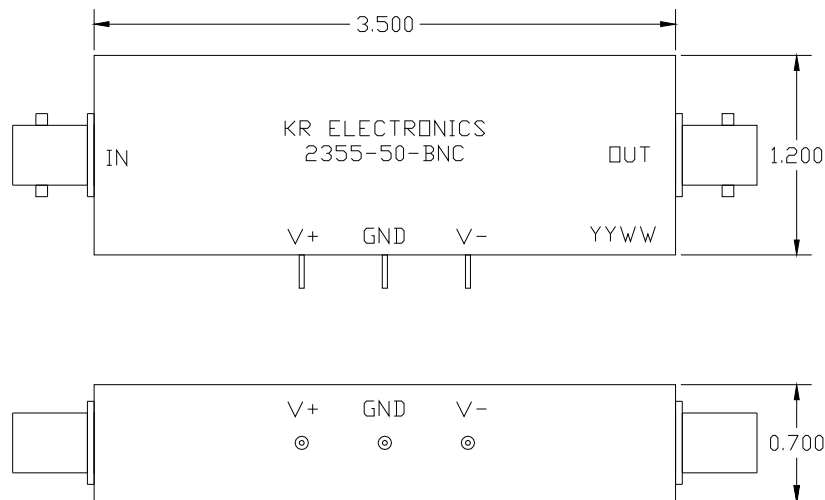

All Dimensions in inches

BNC(f) Connectors In/Out

Connect GND to both signal ground and common of voltage supply

Power supply internally decoupled with 0.1 uF ceramic capacitors

KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001

Web www.krfilters.com
Email sales@krfilters.com
Phone (732) 636-1900
Fax (732) 636-1982