
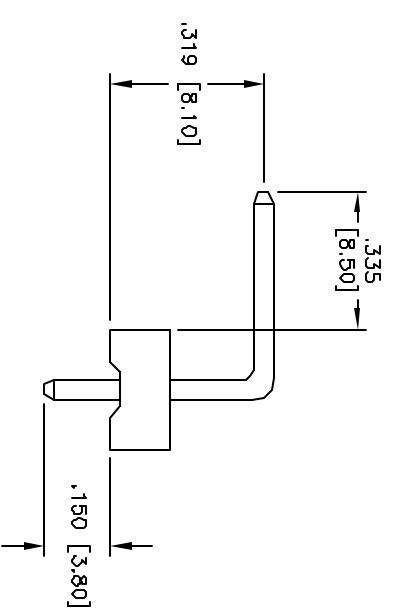
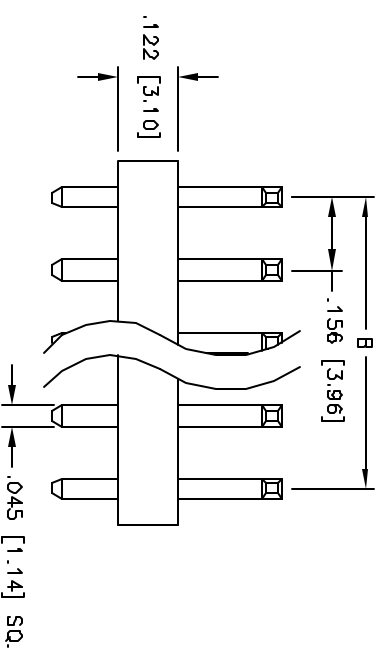
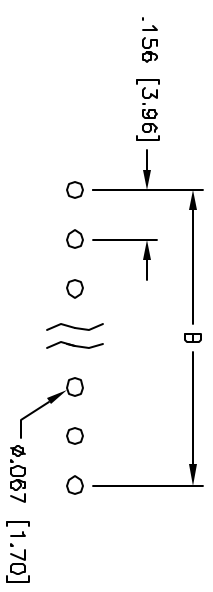


APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	4/12/05	

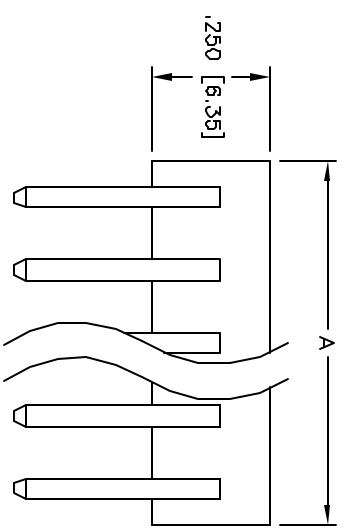

SPECIFICATIONS:

Material:

Insulator: Nylon 66, rated UL 94V-2

Insulator color: White

Contacts: Brass

Plating:

Tin over Copper underplate overall

Electrical:

Operating voltage: 250 VAC max

Current rating: 5 Amps max

Contact resistance: 10 Mohms max

Insulation resistance: 1,000 Mohms min

Dielectric withstanding voltage: 1,500 VAC for 1 minute

Temperature Rating:

Operating temperature: -25°C to +85°C

Environmental:

Lead free, RoHS compliant

Recommended soldering temp: 230°C for 5 seconds



Positions: 2 thru 20
 A = .156 [3.96] x No. of Positions + .012 [0.30]
 B = .156 [3.96] x No. of Spaces

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED

INCHES	HILES
X ± .10	ØX ± .10
XX ± .020	ØXX ± .019
.XXX ± .015	ØXXX ± .010

APPROVALS

DRAWN	SS	DATE
CHECKED		4/12/05
APPROVED		

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE
**.156 [3.96] POWER HEADER
 RIGHT ANGLE, WITHOUT LOCK POLARIZER**

SIZE	PART NO.	SCALE	SHEET	OF
X	LHB-XX-882	NIB	1	1