


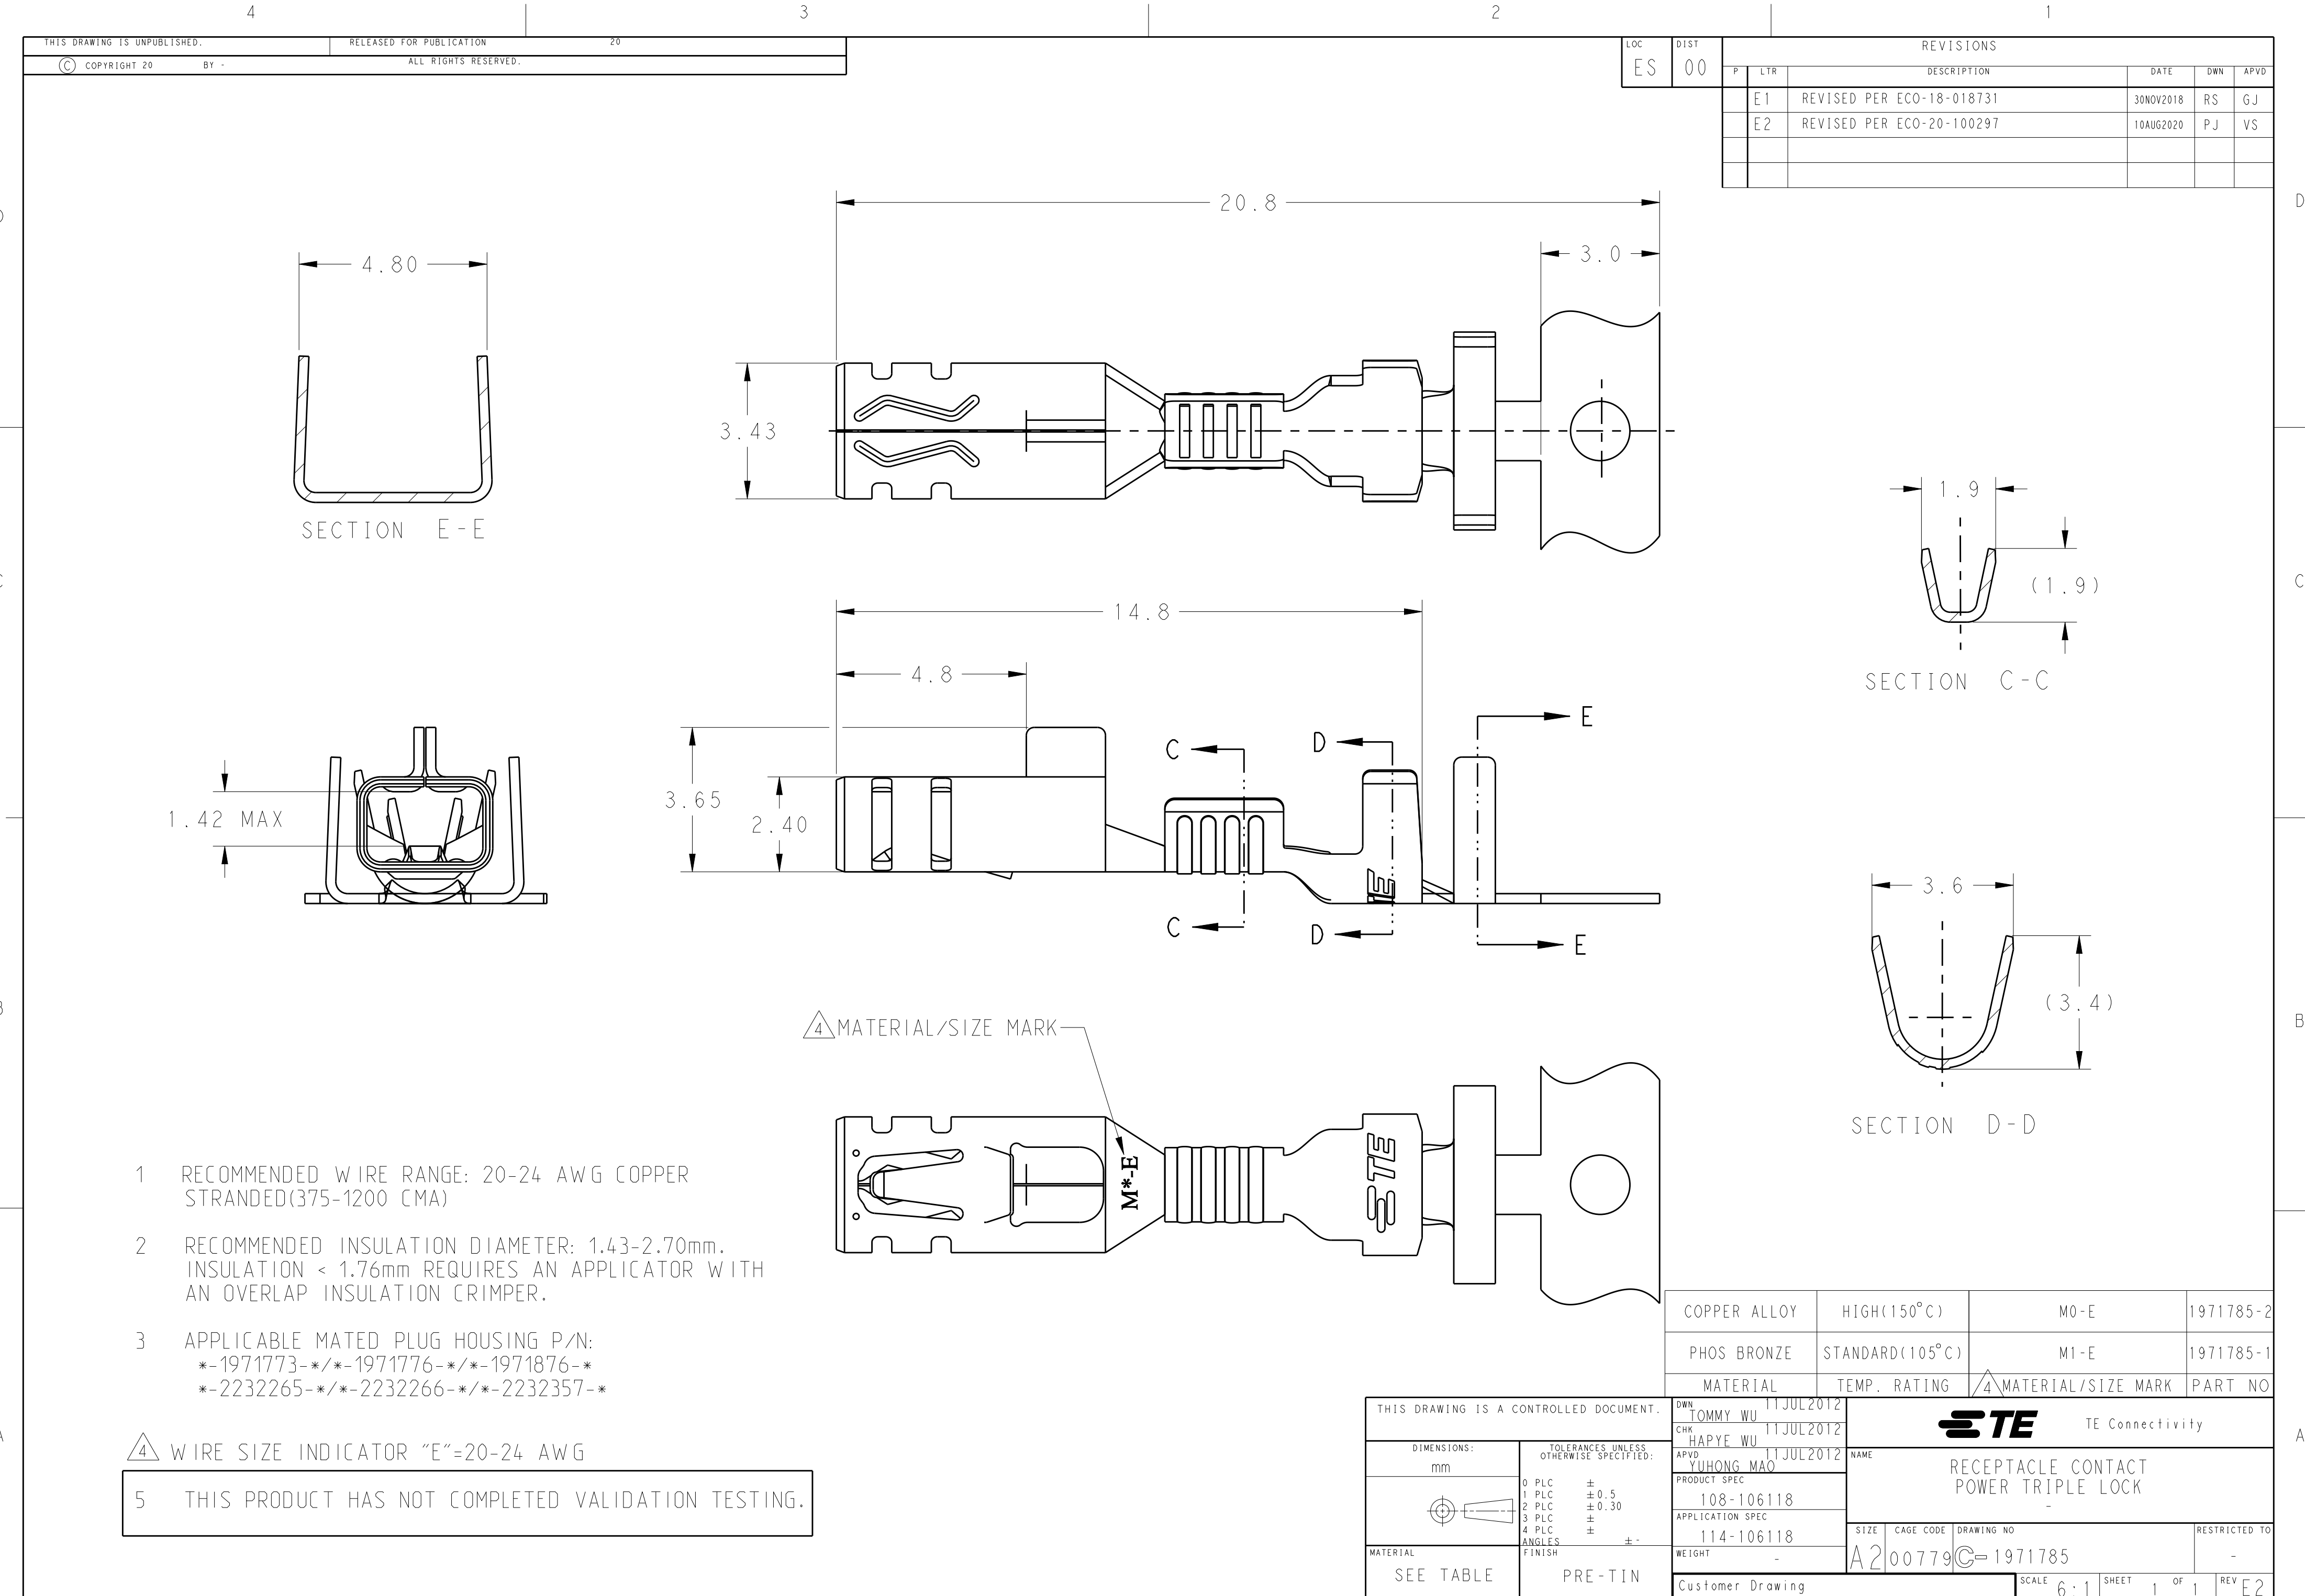

- 1 RECOMMENDED WIRE RANGE: 20-24 AWG COPPER STRANDED(375-1200 CMA)
- 2 RECOMMENDED INSULATION DIAMETER: 1.43-2.70mm. INSULATION < 1.76mm REQUIRES AN APPLICATOR WITH AN OVERLAP INSULATION CRIMPER.
- 3 APPLICABLE MATED PLUG HOUSING P/N:
-1971773-/*-1971776-*/*-1971876-*
-2232265-/*-2232266-*/*-2232357-*

4 WIRE SIZE INDICATOR "E"=20-24 AWG

5 THIS PRODUCT HAS NOT COMPLETED VALIDATION TESTING.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
E1		REVISED PER ECO-18-018731	30NOV2018	RS	GJ
E2		REVISED PER ECO-20-100297	10AUG2020	PJ	VS

COPPER ALLOY	HIGH(150°C)	M0-E	1971785-2
PHOS BRONZE	STANDARD(105°C)	M1-E	1971785-1
MATERIAL	TEMP. RATING	4 MATERIAL/SIZE MARK	PART NO
DWN TOMMY WU 11JUL2012 CHK HAPYE WU 11JUL2012 APVD YUHONG MAO 11JUL2012			
PRODUCT SPEC 108-106118 APPLICATION SPEC 114-106118 WEIGHT -			
Customer Drawing			
SCALE 6:1 SHEET 1 OF 1 REV E2			

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN TOMMY WU 11JUL2012 CHK HAPYE WU 11JUL2012 APVD YUHONG MAO 11JUL2012	
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	PRODUCT SPEC	NAME
	0 PLC ±0.5 1 PLC ±0.30 2 PLC ±0.30 3 PLC ±0.30 4 PLC ±0.30 ANGLES ±0.5 FINISH PRE-TIN	108-106118 114-106118 -	RECEPTACLE CONTACT POWER TRIPLE LOCK
MATERIAL SEE TABLE		SIZE A2 CAGE CODE 00779 DRAWING NO C-1971785	RESTRICTED TO -