

Bulk Metal® Technology Precision, Low Value, Current Sense/Current Shunt Resistors



Any value available within resistance range

INTRODUCTION

Model VCS101, VCS103 and VCS401 resistors are available in 2 configurations. This Bulk Metal® resistor can serve as a low ohm, high power resistive shunt or as a medium power current sensing resistor. Resistors are non insulated.

Our Applications Engineering Department is prepared to advise and to make recommendations. For non standard technical requirements and special applications, please contact us.

FEATURES

- Low Ohmic Values: 0.005 Ω to 0.25 Ω
- Resistive Tolerance: to ± 0.1 %
- Temperature Coefficient of Resistance (TCR): ± 20 ppm/°C at 0.1 Ω, available to ± 15 ppm/°C Contact Applications Engineering for tighter limits
- 4 leads for Kelvin connection
- Power Rating: to 1.5 W at + 25 °C (free air)
- Maximum Operating Temperature: + 175 °C
- Lead (Pb)-free available
- For better performances, see VCS200 and VCS300 series datasheets



RoHS*
COMPLIANT

APPLICATIONS

- High Precision Instrumentation
- Automatic Test Equipment
- Current Sensing Application
- Industrial
- Medical
- Military
- Measurement Instrumentation

FIGURE 1 - DIMENSIONS AND SCHEMATIC

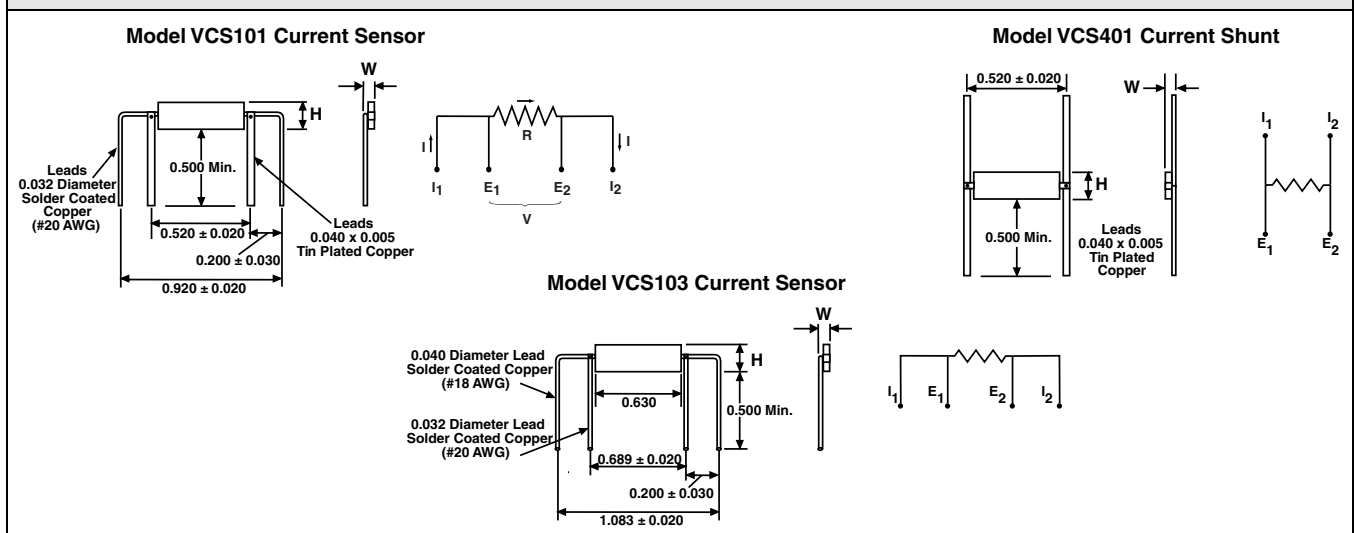


TABLE 1 - CHARACTERISTICS AND DIMENSIONS

MODEL NUMBER	RESISTANCE RANGE (Ω)	TIGHTEST RESISTANCE TOLERANCE (%)	POWER RATING at + 25 °C	MAXIMUM CURRENT	DIMENSIONS		
					INCHES	(mm)	
VCS101 ¹⁾	0.005 to 0.01 Ω 0.01 to 0.05 Ω 0.05 to 0.2 Ω	± 1 ± 0.5 ± 0.1	1 W	15 A	H	0.130	(3.30)
					W	0.080	(2.03)
VCS401 ¹⁾			1 W	3 A	H	0.130	(3.30)
					W	0.080	(2.03)
VCS103 ¹⁾	0.005 to 0.01 Ω 0.01 to 0.05 Ω 0.05 to 0.25 Ω	± 1 ± 0.5 ± 0.1	1.5 W	15 A	H	0.190	(4.83)
					W	0.080	(2.03)

Note

1. Tighter Performances are available, please contact application engineering department

* Pb containing terminations are not RoHS compliant, exemptions may apply

TABLE 2 - VCS101, VCS103 AND VCS401 PERFORMANCE¹⁾

TEST OR CONDITION	VCS101, VCS103 AND VCS401
Maximum Ambient Temp. at Rated Power	+ 25 °C
Maximum Ambient Temp. at Zero Power	+ 175 °C
Temperature Coefficient	See Table 3
Thermal Shock	± 0.05 %
Short Time Overload	± 0.5 %
Terminal Strength	± 0.1 %
High Temperature Exposure	± 1.0 %
Moisture Resistance	± 0.1 %
Low Temperature Storage	± 0.05 %
Shock (Specified Pulse)	± 0.1 %
Vibration (High Frequency)	± 0.1 %
Life (Rated Power, + 25 °C, 2000 hrs.)	± 3.0 %
Resistance Tolerance	± 0.1 %, ± 1 %, ± 3 %, ± 5 %, ± 10 %


Note

1. ΔR's plus additional 0.0005 Ω for measurement error.

TABLE 3 - TC SPECIFICATIONS

VALUE	TC (ppm/°C)
0.005 Ω to 0.01 Ω	± 90
> 0.01 Ω to 0.05 Ω	± 30
> 0.05 Ω to 0.25 Ω	± 20

FIGURE 2 - POWER DERATING CURVE

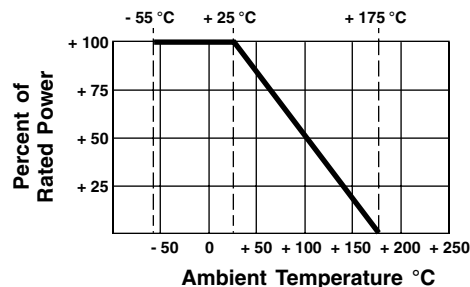


Note

- Further derating not necessary.



TABLE 4 - GLOBAL PART NUMBER INFORMATION


NEW GLOBAL PART NUMBER: Y09300R01000F9L (preferred part number format)

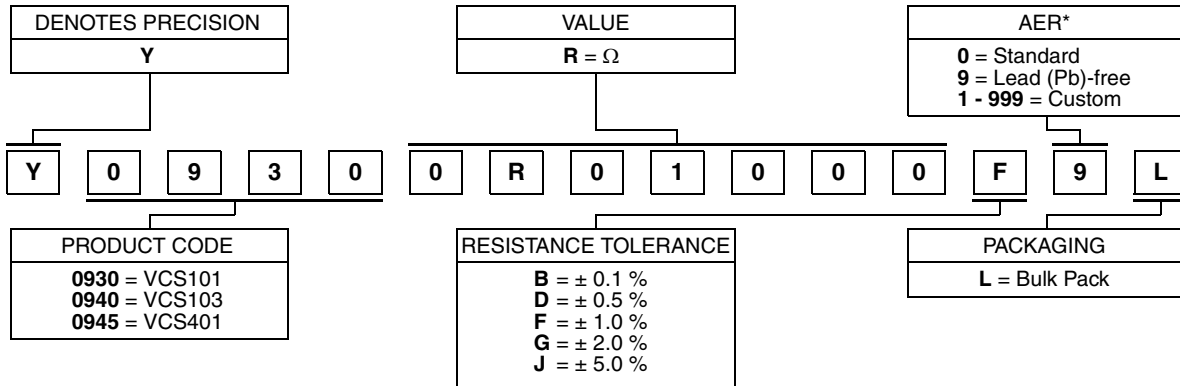

FOR EXAMPLE: ABOVE GLOBAL ORDER Y0930 0R01000 F 9 L:

TYPE: VCS101
 VALUE: 0.01 Ω
 ABSOLUTE TOLERANCE: ± 1.0 %
 TERMINATION: Lead (Pb)-free
 PACKAGING: Bulk Pack

HISTORICAL PART NUMBER: VCS101T 0R0100 F B (will continue to be used)

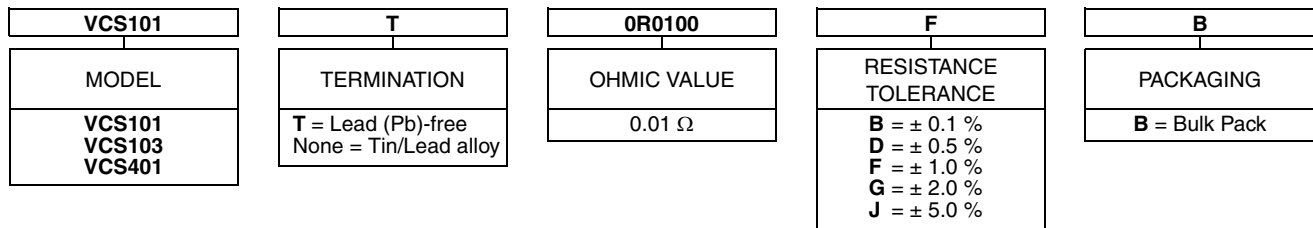

Note

* For non-standard requests, please contact Application Engineering.



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.