

A

A

B

B

C

C

D

D

E






E

F


F

H

H

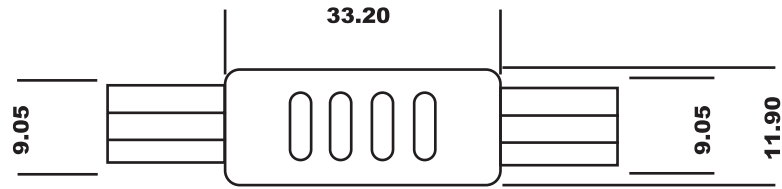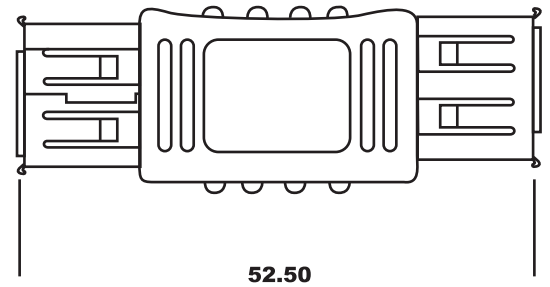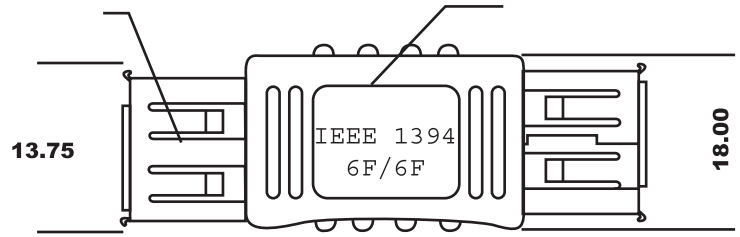

PIN Assignment

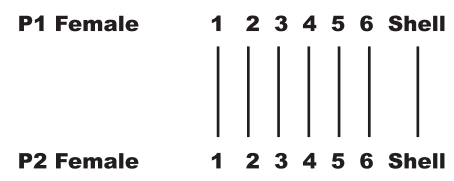

Note:

- 1.Hook Up Wire: UL 1007 30AWG 7 Strand L:17mm
- 2.Connector: P1&P2: IEEE1394 USB Female Gold Flash Contact: Nickel
Plated Shell Plastic: Black
- 3.Inner Mold with Copper Foil
- 4.Core: F18RID 4.1mm * 3.2mm * 7mm
(The wires that were soldered in the PIN 5&PIN 6 of 1394 6P female are through the core)
- 5.Hood: Molded Type PVC 45P Color:Black(NK-KO1)
- 6.Electrical Test: <1> 100% Open Short & MIS Wire Test
<2>Contact Resistance 3 Ohms Max
<3>Insulation Resistance 20M Ohms Min
- 7.Packing: See P-0039 Rev.C Packing Drawing
- 8.EAN Code: 4016032076179

Scale	1:1						Name	Item No. AB-1394-2-R
TOLERANCE						Drawn	10.24.11	
X.X	±0.40					Approved		Drawing No.
X.XX	±0.25							rev00
X.XXX	±0.15							
Angle	±3°							Replace Sheet
		Modification	Date	Name				

