
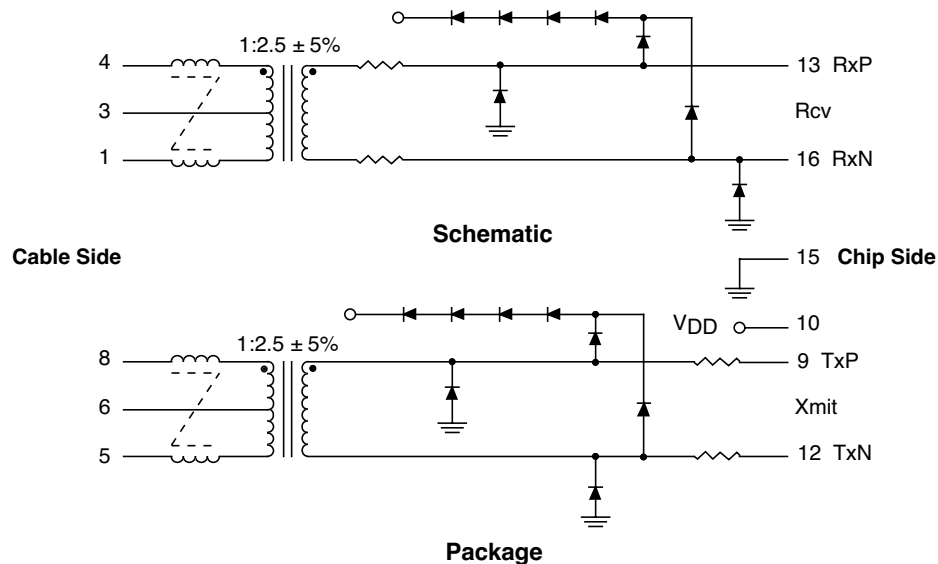


- Design for Motorola MC145574 Transceiver IC
- ESD and Latch-Up Protection Diodes Included
- Operating Temperature Range : 0°C to 70°C
- Isolation: 1500 Vrms

Electrical Parameters @ 25° C

Pri. OCL (mH Min.)	Leakage Inductance (uH Max)	DCR ($\Omega \pm 30\%$)	CMC OCL (μ H Typ.)	CMC DCR (Ω Typ.)
100 KHz, 0.1 Vrms	@100 KHz, 0.1 Vrms		Per Line	Per Line
20	10	2.4	40	0.4
Pins 13-16 & 9-12		Pins 1-4 or Pins 5-8		

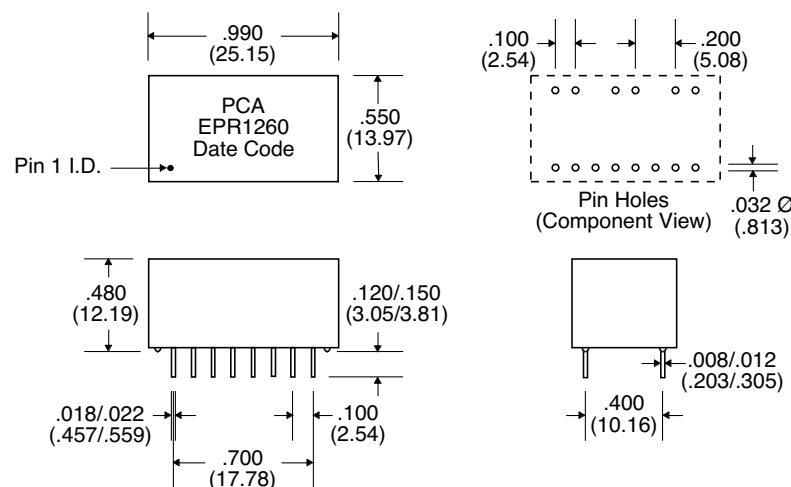

Unless Otherwise Specified Dimensions are in Inches /mm ± .010 / .25