


PNP Silicon Planar Epitaxial Transistors

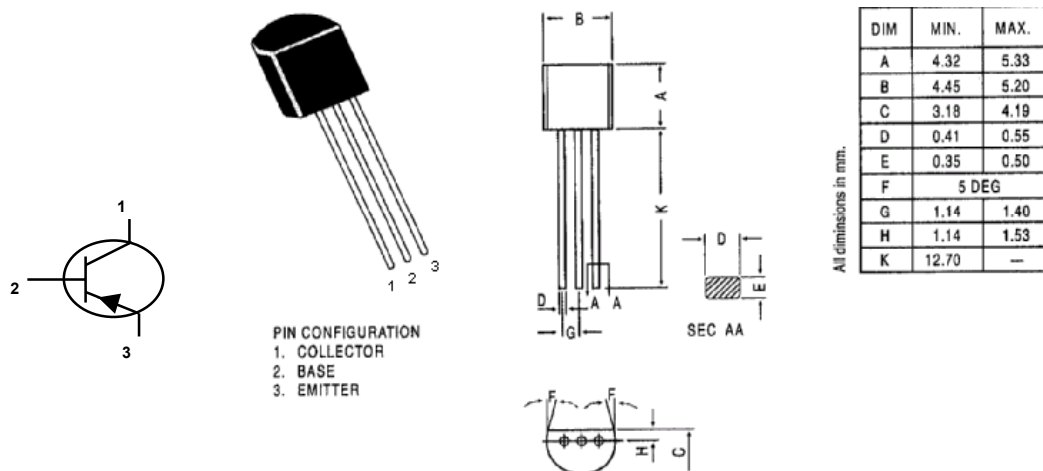

TO-92 SMD Package

Absolute Maximum Ratings (Ta = 25 °C unless specified otherwise)

DESCRIPTION	SYMBOL	BC556	BC557	BC558	UNITS
Collector Emitter Voltage	V_{CEO}	65	45	30	V
Collector Emmitter Voltage	V_{CES}	80	50	30	V
Collector Base Voltage	V_{CBO}	80	50	30	V
Emitter Base Voltage	V_{EBO}	5	5	5	V
Collector Current Continuous	I_C		100		mA
Peak	I_{CM}		200		
Emitter Current - Peak	I_{EM}		200		mA
Base Current - Peak	I_{BM}		200		mA
Total power dissipation up to $T_{amb} = 25\text{ }^{\circ}\text{C}$	P_{tot}		500		mW
Storage Temperature	T_{stg}		-55 to +150		$^{\circ}\text{C}$
Junction Temperature	T_j		150		$^{\circ}\text{C}$

Thermal Resistance

From junction to ambient	$R_{th(j-a)}$	250	$^{\circ}\text{C/W}$
--------------------------	---------------	-----	----------------------

Electrical Characteristics (Ta=25 °C unless otherwise specified)

DESCRIPTION	SYMBOL	TEST CONDITION	MIN	TYP	MAX	UNITS
Collector Emitter Voltage BC556 BC557 BC558	V_{CEO}	$I_C = 2mA, I_B = 0$	65 45 30			V
Collector Base Voltage BC556 BC557 BC558	V_{CBO}	$I_C = 100\mu A, I_E = 0$	80 50 30			V
Emitter Base Voltage	V_{EBO}	$I_E = 100\mu A, I_C = 0$	5			V
Collector Cut off Current	I_{CBO}	$V_{CB} = 30V, I_E = 0$			15	nA
		$V_{CB} = 30V, I_E = 0, T_j = 150^\circ C$			4	uA
Collector Cut off Current BC556 BC557 BC558 BC556 BC557 BC558	I_{CES}	$V_{CE} = 80V$ $V_{CE} = 50V$ $V_{CE} = 30V$ $V_{CE} = 80V, T_j = 125^\circ C$ $V_{CE} = 50V, T_j = 125^\circ C$ $V_{CE} = 30V, T_j = 125^\circ C$		0.20 0.20 0.20	15 15 15	nA nA nA
					4 4 4	uA uA uA
Base Emitter On Voltage	$V_{BE(on)}$	$I_C = 2mA, V_{CE} = 5V$ $I_C = 10mA, V_{CE} = 5V$	0.55	0.66	0.70 0.82	V
Collector Emitter Saturation Voltage	$V_{CE(Sat)}$	$I_C = 10mA, I_B = 0.5mA$ $I_C = 100mA, I_B = 5mA$		0.09 0.25	0.30 0.65	V
Base Emitter Saturation Voltage	$V_{BE(Sat)}$	$I_C = 10mA, I_B = 0.5mA$ $I_C = 100mA, I_B = 5mA$		0.70 0.90		V
DC Current Gain	h_{FE}	$V_{CE} = 5V, I_C = 10\mu A$ A B C $V_{CE} = 5V, I_C = 2mA$ BC556 BC557/BC558 A B C $V_{CE} = 5V, I_C = 100mA$ A B C		90 150 270 75 75 110 200 420 120 200 400		

Electrical Characteristics (Ta=25 °C unless otherwise specified)

DESCRIPTION	SYMBOL	TEST CONDITION	MIN	TYP	MAX	UNITS
<i>DYNAMICS CHARACTERISTICS</i>						
Transition Frequency	f_T	$I_C = 10\text{mA}$, $V_{CE} = 5\text{V}$, $f = 100\text{MHz}$		150		MHz
Collector output Capacitance	C_{cbo}	$V_{CB} = 10\text{V}$, $f = 1\text{MHz}$		6		pF
Noise Figure	NF	$V_{CE} = 5\text{V}$, $I_C = 0.2\text{mA}$ $R_S = 2\text{k ohm}$, $f = 1\text{kHz}$, $B = 200\text{Hz}$		2	10	dB
Small Signal Current Gain	h_{fe}	$V_{CE} = 5\text{V}$, $I_C = 2\text{mA}$, $f = 1\text{kHz}$				
		A		220		
		B		330		
		C		600		
Input Impedance	h_{ie}	$V_{CE} = 5\text{V}$, $I_C = 2\text{mA}$, $f = 1\text{kHz}$				
		A	1.6	2.7	4.5	k ohm
		B	3.2	4.5	8.5	
		C	6.0	8.7	15	
Voltage Feedback	h_{re}	$V_{CE} = 5\text{V}$, $I_C = 2\text{mA}$, $f = 1\text{kHz}$				
		A		1.5		x10
		B		2.0		
		C		3.0		
Output Admittance	h_{oe}	$V_{CE} = 5\text{V}$, $I_C = 2\text{mA}$, $f = 1\text{kHz}$				
		A		18	30	u MHO
		B		30	60	
		C		60	110	