
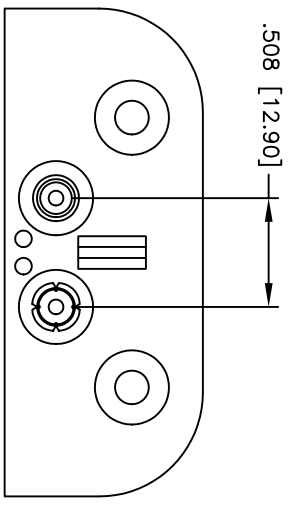


Rev	AWO #	Description	Date	Appr
-		RELEASED	1/20/05	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

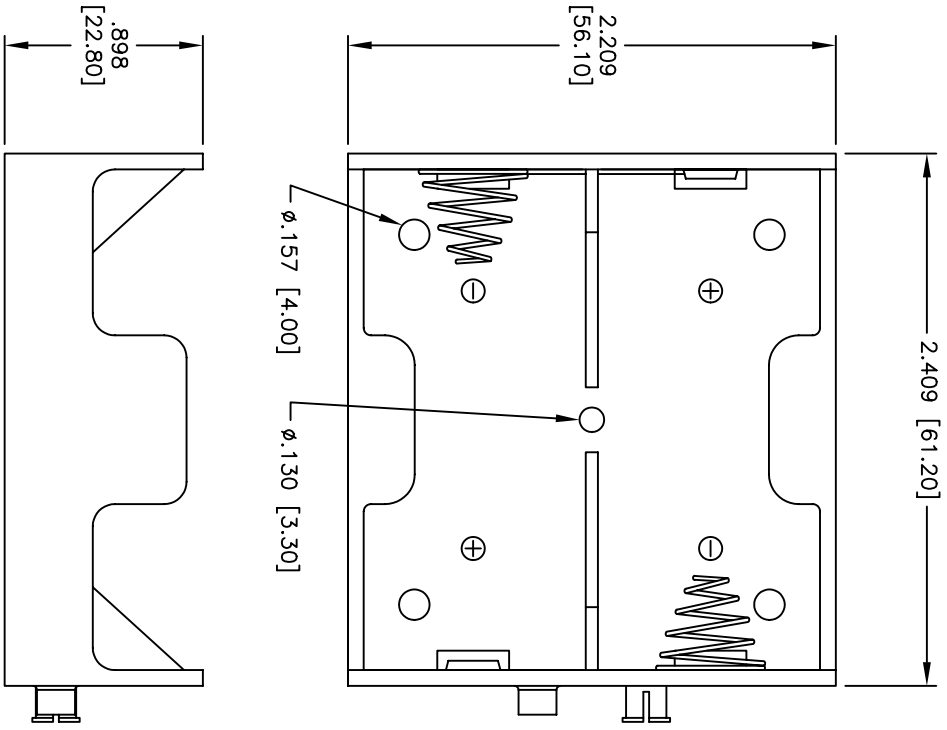

**SPECIFICATIONS:**

**Material:**  
 Insulator: Impact resistant Polypropylene, rated UL94-HB  
 Insulator color: Black  
 Spring: Steel, Nickel plated  
 Contacts: Steel, Nickel plated  
 Snap terminals: Brass, Nickel plated  
**Electrical:**  
 Operating voltage: 1.5 VDC max.  
 Operating temperature: -10°C to +80°C  
**Environmental:**  
 Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLDS
.X ± .10	ØX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXXX ± .010
APPROVALS	DATE
DRAWN SS	1/20/05
CHECKED	
APPROVED	

**ADAM TECH**  
 909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: BATTERY HOLDER, MALE/FEMALE SNAPS  
 FOR TWO "C" CELLS

SIZE: X PART NO.: BH-13-2  
 REF: SCALE: NTS SHEET 1 OF 1

6 5 4 3 2 1