SILICON ABRUPT VARACTOR DIODE

DESCRIPTION:

The **AT12020-21** is Designed for High Performance RF and Microwave Applications Requiring an Abrupt Variable Capacitance Characteristic.

FEATURES INCLUDE:

- High Tuning Ratio, **ΔC_T = 10 MIN.**
- High Quality Factor, **Q = 300 MIN.**
- Hermetic Package, **C_P = .20 pF**
  L_S = .42 nH

PACKAGE STYLE 21

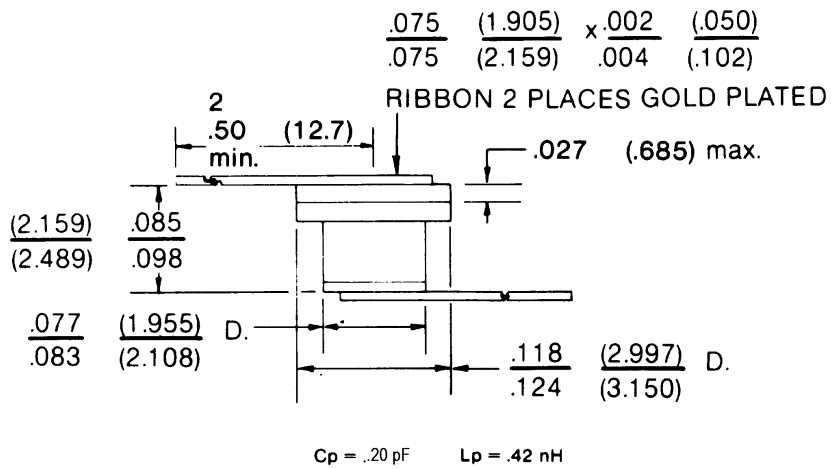

MAXIMUM RATINGS

I_F	200 mA
V_R	120 V
P_{DISS}	1.75W @ T_C 25 ^oC
T_J	-55 ^oC to +150 ^oC
T_{STG}	-55 ^oC to +150 ^oC
θ_{JC}	70 ^oC/W

CHARACTERISTICS T_C = 25 ^oC

SYMBOL	TEST CONDITIONS		MINIMUM	TYPICAL	MAXIM	UNITS
V_R	I_R = 10 µA		120			**V**
V_F	I_F = 1 mA				1.0	**V**
I_R	V_R = 100 V				100	**µA**
C_T	V_R = 4 V	f = 1.0 MHz	36	38	40	**pF**
ΔC_T	C_{T0}/ C_{T120}	f = 1.0 MHz	10.0			**---**
Q	V_R = 4 V	f = 50 MHz	300			**---**
R_S	I_F = 10 mA	f = 2400 MHz			0.9	**Ω**

ADVANCED SEMICONDUCTOR, INC.
7525 ETHEL AVENUE • NORTH HOLLYWOOD, CA 91605 • (818) 982-1200 • FAX (818) 765-3004

Specifications are subject to change without notice.