

DC Pass Power Splitter/Combiner

ZB4PD1-152-75+

4 Way-0° 75Ω 650 to 1500 MHz

Maximum Ratings


Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	10W max.
Internal Dissipation	0.375W max.
DC Current (each port)	1.25A max.

Permanent damage may occur if any of these limits are exceeded.

Coaxial Connections

SUM PORT	S
PORT 1	1
PORT 2	2
PORT 3	3
PORT 4	4

Outline Drawing

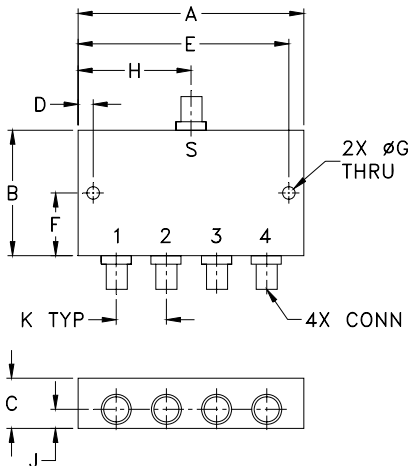

Outline Dimensions (inch/mm)

A	B	C	D	E	F
3.50	2.13	.88	.150	3.350	1.06
88.90	54.10	22.35	3.81	85.09	26.92
G	H	J	K		wt
.125	1.75	.44	.89		grams
3.18	44.45	11.18	22.61		260

Features

- high isolation, 23 dB typ.
- rugged shielded case
- very good VSWR, 1.10:1 typ.
- up to 10W power input as a splitter
- DC pass sum port to all output ports

Applications

- cellular
- communication systems
- receivers/transmitters



CASE STYLE: UU188
Connectors Model
BNC ZB4PD1-152-75+

+RoHS Compliant
The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications




Electrical Specifications

FREQ. RANGE (MHz)	ISOLATION (dB)		INSERTION LOSS (dB) ABOVE 6.0 dB		PHASE UNBALANCE (Degrees)	AMPLITUDE UNBALANCE (dB)	VSWR (:1)			
	Typ.	Min.	Typ.	Max.			S	OUT		Max.
f _L -f _U					Max.	Max.	Typ.	Max.	Typ.	Max.
650-1500	23	18	0.6	1.2	6	0.4	1.20	1.5	1.15	1.30

Typical Performance Data

Freq. (MHz)	Total Loss ¹ (dB)				Amp. Unbal. (dB)	Isolation (dB)			Phase Unbal. deg.	VSWR S	VSWR 1	VSWR 2	VSWR 3	VSWR 4
	S-1	S-2	S-3	S-4		1-2	2-3	3-4						
650.00	6.42	6.31	6.31	6.43	0.12	20.81	26.97	21.04	1.18	1.21	1.13	1.09	1.09	1.12
670.00	6.45	6.34	6.34	6.46	0.12	21.83	28.00	22.08	1.23	1.23	1.13	1.09	1.09	1.12
700.00	6.50	6.38	6.39	6.51	0.13	23.48	29.59	23.74	1.28	1.25	1.13	1.09	1.09	1.12
750.00	6.52	6.40	6.41	6.54	0.13	26.33	31.37	26.57	1.34	1.25	1.12	1.09	1.08	1.12
800.00	6.51	6.39	6.41	6.53	0.14	28.30	30.90	28.43	1.40	1.21	1.11	1.08	1.08	1.11
900.00	6.46	6.36	6.37	6.47	0.11	24.70	27.58	24.68	1.50	1.10	1.08	1.08	1.07	1.08
1000.00	6.61	6.53	6.53	6.61	0.08	21.39	25.85	21.44	1.83	1.25	1.07	1.10	1.10	1.07
1100.00	6.74	6.66	6.66	6.73	0.08	21.27	26.00	21.37	2.39	1.40	1.08	1.12	1.11	1.08
1200.00	6.59	6.47	6.47	6.59	0.12	24.09	28.21	24.18	2.89	1.38	1.08	1.10	1.10	1.10
1250.00	6.49	6.36	6.35	6.49	0.14	25.82	30.91	25.78	3.00	1.29	1.09	1.09	1.09	1.11
1300.00	6.49	6.32	6.31	6.49	0.18	25.63	35.26	25.39	3.04	1.19	1.11	1.07	1.08	1.13
1350.00	6.61	6.42	6.40	6.59	0.21	23.83	38.31	23.62	3.10	1.13	1.14	1.07	1.08	1.15
1400.00	6.77	6.57	6.54	6.74	0.22	22.39	33.30	22.26	3.11	1.19	1.16	1.07	1.08	1.16
1450.00	6.89	6.69	6.66	6.85	0.23	21.99	28.77	21.92	3.27	1.28	1.18	1.09	1.09	1.17
1500.00	6.88	6.69	6.65	6.84	0.22	22.79	25.67	22.86	3.39	1.33	1.18	1.09	1.09	1.17

1. Total Loss = Insertion Loss + 6dB splitter loss.

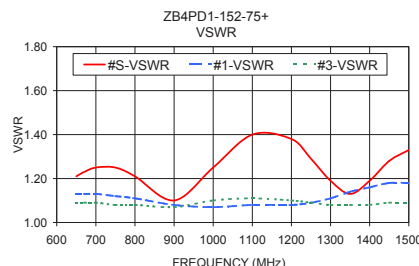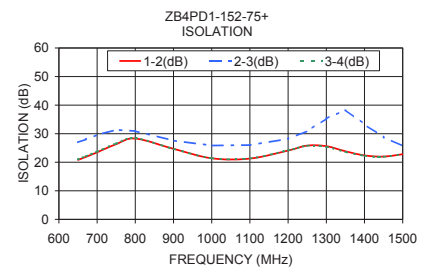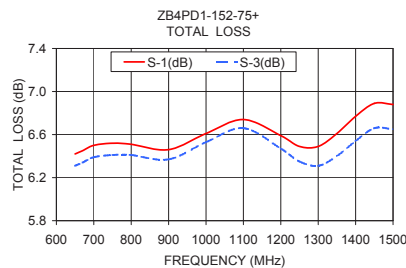

electrical schematic



Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/WCLStore/terms.jsp

