
13002AG

Preliminary ***NPN SILICON TRANSISTOR***

HIGH VOLTAGE FAST SWITCHING NPN POWER APPLICATIONS



TO-92

■ DESCRIPTION

The device is manufactured using High Voltage Multi Epitaxial Planar technology for high switching speeds and high voltage capability.

The UTC **13002AG** is designed for use in Compact Fluorescent Lamps.

■ FEATURES


* High Voltage Capability
* Low Spread of Dynamic Parameters
* Very High Switching Speed

■ ORDERING INFORMATION

Ordering Number		Package	Pin Assignment			Packing
Lead Free	Halogen Free		1	2	3	
13002AGL-T92-A-B	13002AGP-T92-A-B	TO-92	E	C	B	Tape Box
13002AGL-T92-A-K	13002AGP-T92-A-K	TO-92	E	C	B	Bulk

13002AGL-T92-A-B (1)Packing Type (2)Pin Assignment (3)Package Type (4)Lead Free	(1) B: Bluk, K: Bulk (2) refer to Pin Assignment (3) T92: TO-92 (4) L: Lead Free, P: Halogen Free

■ MARKING

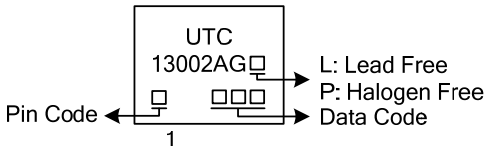

Copyright © 2014 Unisonic Technologies Co., Ltd

■ ABSOLUTE MAXIMUM RATINGS (T_A = 25°C, unless otherwise specified)

PARAMETER	SYMBOL	RATINGS	UNIT
Collector Emitter Voltage (V_{BE} = 0)	V_{CES}	700	V
Collector Emitter Voltage (I_B = 0)	V_{CEO}	400	V
Emitter Base Voltage (I_C = 0)	V_{EBO}	9	V
Collector Current	I_C	0.75	A
Collector Peak Current (t_p < 5 ms)	I_{CM}	0.5	A
Base Current	I_B	0.4	A
Base Peak Current (t_p < 5 ms)	I_{BM}	0.75	A
Total Dissipation at Ta = 25°C	P_D	0.95	W
Junction Temperature	T_J	+150	°C
Storage Temperature	T_{STG}	-40 ~ +150	°C

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ THERAMAL DATA


PARAMETER	SYMBOL	RATINGS	UNIT
Thermal Resistance Junction-ambient	θ_{JA}	130	°C /W

■ ELECTRICAL CHARACTERISTICS (T_A= 25°C, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Collector Emitter Sustaining Voltage (I_B = 0) (Note)	$V_{CEO(SUS)}$	I_C = 1 mA	700			V
Collector Emitter Saturation Voltage (Note)	$V_{CE(SAT)}$	I_C = 0.2 A , I_B = 40 mA		0.2	0.5	V
		I_C = 0.3 A , I_B = 75 mA		0.3	1	
		I_C = 0.4 A , I_B = 135 mA		0.4	1.5	
Base Emitter Saturation Voltage (Note)	$V_{BE(SAT)}$	I_C = 0.2 A , I_B = 40 mA			1	V
		I_C = 0.3 A , I_B = 75 mA			1.2	
Emitter Cut off Current (I_C = 0)	I_{EBO}	V_{EB} = 9 V			1	mA
Collector Cut off Current (V_{BE} = -1.5V)	I_{CEV}	V_{CE} = 700 V			250	μ A
DC Current Gain	h_{FE*}	I_C = 0.2 A, V_{CE} = 5 V	12		27	
		I_C = 0.4 A, V_{CE} = 5 V	7		20	
Inductive Load Fall Time	t_F	I_C = 0.2 A , V_{CLAMP} = 300 V I_{B1} = -I_{B2} = 40 mA , L = 3 mH		0.3		μ s

Note: Pulsed: Pulse duration = 300μs, duty cycle = 1.5 %

■ INDUCTIVE LOAD SWITCHING TEST CIRCUIT

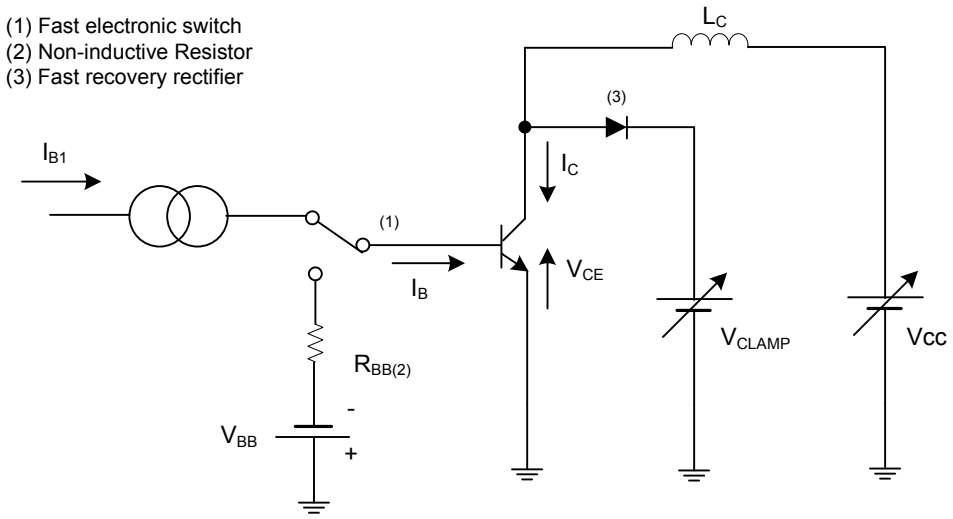

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.