Product data sheet
Characteristics

XZCRB151141C2
jumper cable -male straight M12 4 pin-female straight M12 4 pin-PUR shielded 2m



Main

Accessory / separate part category	Cabling accessory
Accessory / separate part type	Jumper cable

Complementary

Jumper cable end 1	M12 male 4 pins straight connector with screw-on
Jumper cable end 2	M12 female 4 pins straight connector with screw-on
Collar material	Metal
Cable composition	4 x 0.34 mm²
Cable length	2 m
Wire insulation material	PUR (shielded cable)
Cable outer diameter	5.9 mm
[Ue] rated operational voltage	250 V AC 300 V DC
[In] rated current	4 A
Insulation resistance	>= 1000 MOhm
Maximum resistance across terminals	5000 mOhm
Net weight	0.3 kg

Environment

IP degree of protection	IP65 IP67
Ambient air temperature for operation	-25…80 °C static
Ambient air temperature for storage	-25…80 °C

Packing Units

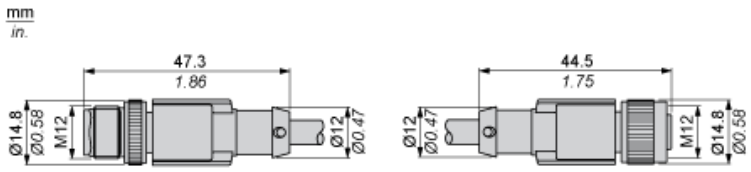
Package 1 Weight	125 g
Package 2 Weight	5.358 kg

Offer Sustainability

REACh Regulation	REACh Declaration
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	Yes

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein.
This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications.
It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof.
Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Dimensions


mm
in.
47.3
1.86
44.5
1.75
Ø14.8
Ø0.58
M12
Ø12
Ø0.47
Ø12
Ø0.47
M12
Ø14.8
Ø0.58

Connections and Schemes

