
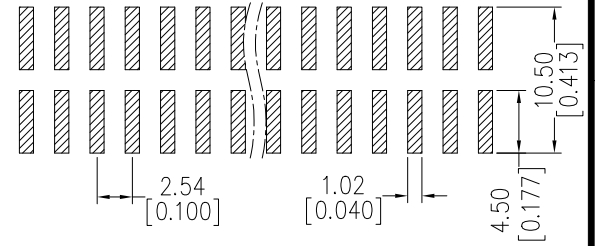


HSF

Recommended P. C. B Layout (Top Side)
(PCB BOARD TOLERANCE ±0.05)

NOTES:
 Current Rating: 3AMP
 Contact Resistance: 20mΩ max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ min
 Operation Temperature: -40℃ to +105℃



Contact Material: Brass
 Contact plating: Au or Sn Over Ni
 Insulator Material: PA9T+33%G.F(UL94V-0)

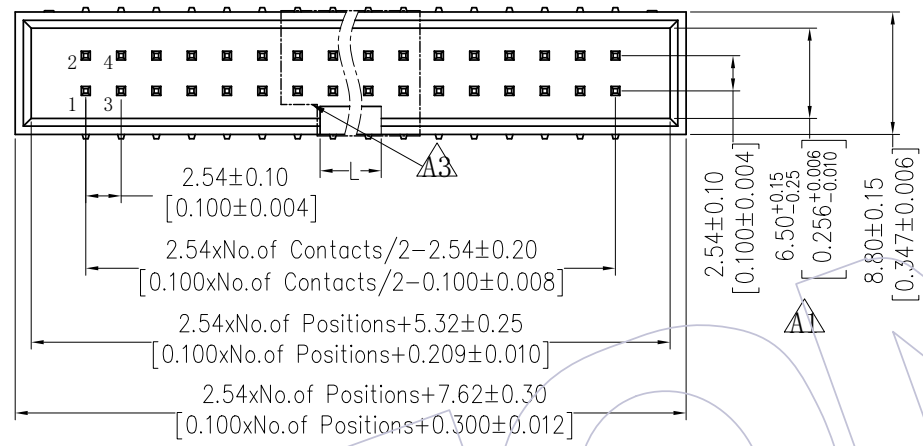

Ordering Information

3110-XX M XX B K00 X X

- No. of Pins: 6P 24P, 8P 26P, 10P 30P, 12P 34P, 14P 40P, 16P 42P, 18P 50P, 20P 60P, 64P
- Contact Plating: G0=Gold Flash, G3=10u"Gold, G4=15u"Gold, G5=30u"Gold, S0=Gold Flash/Tin, S3=10u"Gold/Tin, S4=15u"Gold/Tin, S5=30u"Gold/Tin, SN=Tin
- Color Insulator: B=Black
- Packing: T=Tube, P=Tube+CAP, R=Tape&Reel+CAP

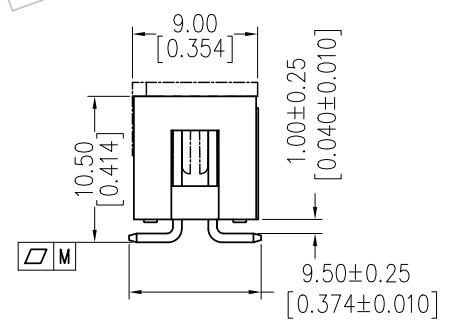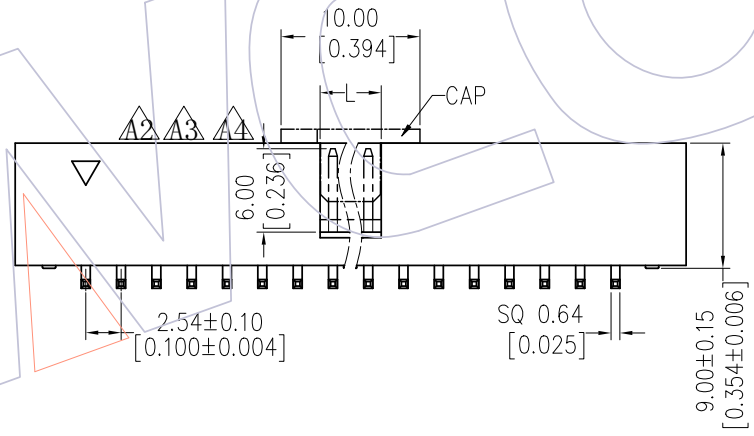

Dimension antitheses list

	NO. Pin	L
△△	6P-8P	4.00
△△	10P-64P	4.40

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
A5	2019/01/24	MODIFY PART NO.	△△	OPERATION	Ding	2019/01/24	UNIT	mm	3110-XXMXXBK00XX △△
A4	2018/11/09	5.90--6.00	△△	x.x ±0.40	CHECK	DATE	inch	A4	TITLE:
A3	2012/09/05	MODIFY CAP	△△	x.xx ±0.25	APPROVE	DATE	SIZE	1/1	2.54 BOX HEADER SMT H=9.0
A0	2008/05/08	NEW	---	x.xxx ±0.15	PROJ.	DATE	SHEET	1/1	Customer NO.
				Angle ± 3°			PROJ.		
				DIM TOL					

WCON
 Http: www.wcon.com

WCON-Dongguan
 Tel: +86 769 85358920
 Fax: +86 769 85358915
 E-mail: sales@wcon.com

WCON-Kunshan
 Tel: +86 512 57468408
 Fax: +86 512 57468468
 E-mail: salesks@wcon.com