



Features

- ✧ For IF SAW filter
- ✧ High attenuation
- ✧ Single-ended operation
- ✧ Dual In-line Package
- ✧ RoHS compliant (2002/95/EC), Pb-free

Specifications

Parameter	Unit	Minimum	Typical	Maximum
Center Frequency	MHz	69.96	70	70.04
Insertion Loss	dB	-	27.6	29
1 dB Bandwidth	MHz	18.16	18.18	-
3 dB Bandwidth	MHz	-	18.25	-
40 dB Bandwidth	MHz	-	19.02	19.04
Passband Variation	dB	-	0.5	1
Absolute Delay	usec	-	4.1	-
Group Delay Variation(f0±8.5MHz)	nsec	-	120	150
Ultimate Rejection	dB	42	46	-
Material Temperature coefficient	KHz/°C	-5.74		
Substrate Material	-	128LN		
Ambient Temperature	°C	25		
Operating Temperature Range	°C	-40	-	+85
Storage Temperature Range	°C	-45	-	+105
DC Voltage	V	0		
Input Power	dBm	-	-	10
ESD Class	-	1A		
Package Size	DIP3512 (35.0x12.8x4.7mm3)			

Notes:


- All specifications are based on the test circuit shown;
- In production, all specifications are measured by Agilent Network analyzer and full 2 port calibration at room temperature;
- Electrical margin has been built into the design to account for the variations due to temperature drift and manufacturing tolerances;
- This is the optimum impedance in order to achieve the performance show.



SIPAT Co., Ltd.
(CETC No.26 Research Institute)
#14 Nanping Huayuan Road,
Chongqing, China, 400060

Part Number	LBN70A55		
Rev. Date	2008-02-03		
Ver.	1.0	Page 1/3	

Matching Configuration

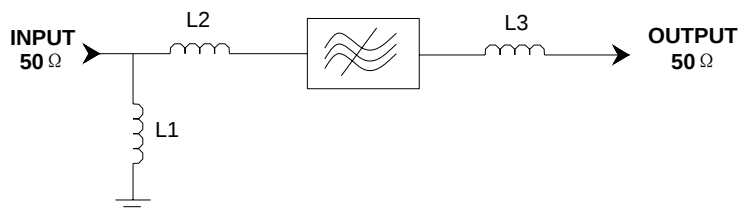


L1 = 330nH

L2 = L3 = 22nH

Source / Load Impedance = 50 ohm

Notes - Component values may change depending
on board layout.

Package Dimension

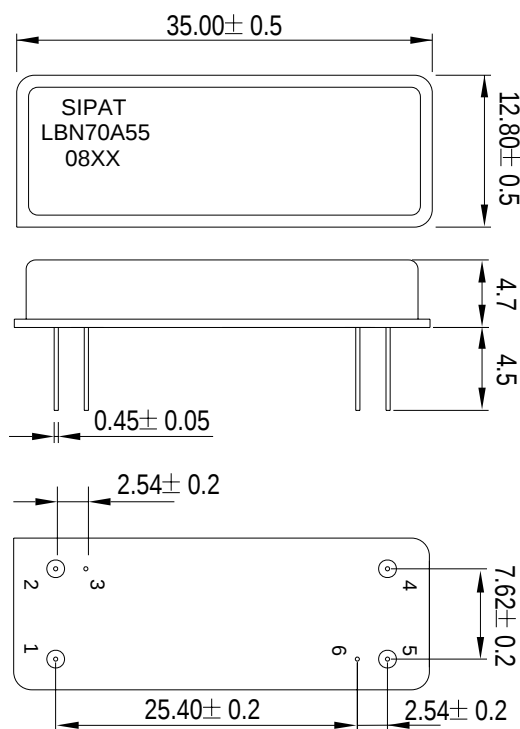

Pad Configuration:

Input 1
Output 5
Ground All Others

Marking Configuration:

1) SIPAT: Manufacturer Name
2) LBN70A55: Part Number
3) 08XX: Date Code

Package: DIP3512

Unit: mm




SIPAT Co., Ltd.
(CETC No.26 Research Institute)
#14 Nanping Huayuan Road,
Chongqing, China, 400060

Part Number	LBN70A55	
Rev. Date	2008-02-03	
Ver.	1.0	Page 2/3



Typical Performance


Frequency Respond

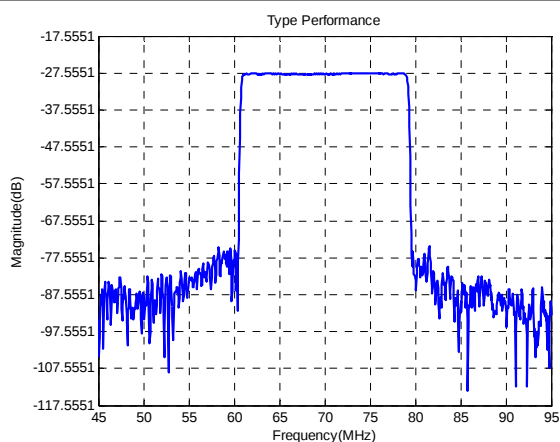

Horizontal: 5MHz/Div

Vertical: 10dB/Div


Passband Respond

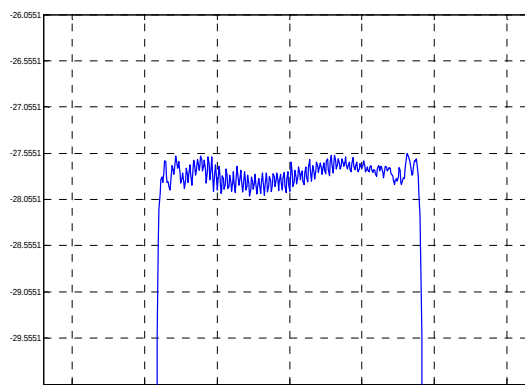

Horizontal: 5MHz/Div

Vertical: 0.5dB/Div


Group Delay Variation($f_0 \pm 8.5\text{MHz}$)

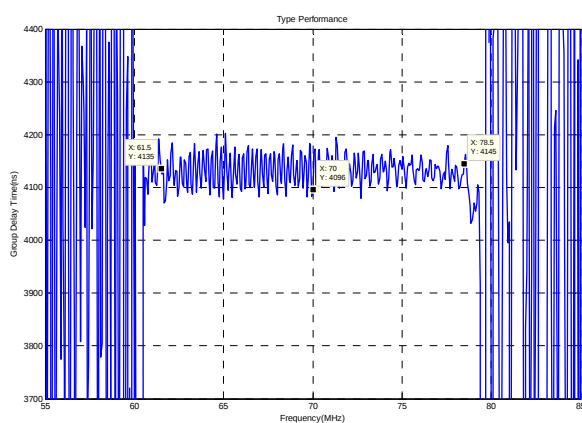

Horizontal: 5MHz/Div

Vertical: 100ns/Div


Phase Linearity($f_0 \pm 8.5\text{MHz}$)

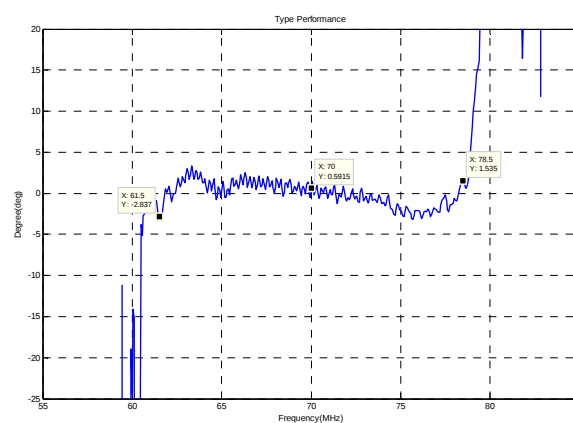


Horizontal: 5MHz/Div

Vertical: 5deg/Div

Smith Chart S11

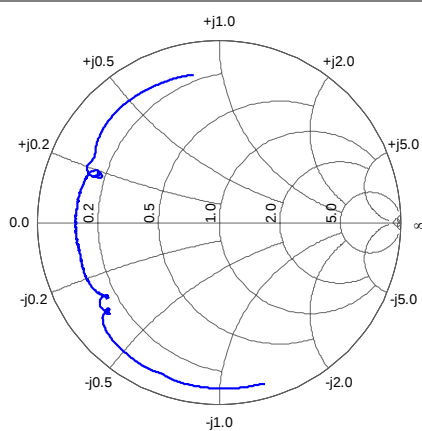

Smith Chart S22

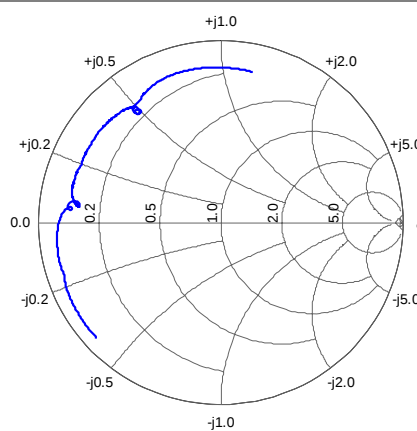

SIPAT Co., Ltd.
(CETC No.26 Research Institute)
#14 Nanping Huayuan Road,
Chongqing, China, 400060

Part Number

LBN70A55

Rev. Date

2008-02-03

Ver.

1.0

Page 3/3