Photo Interrupter

KIT3003C

Description

The photointerrupter high-performance standard type KIT3003C combines a high-output GaAs IRED with a high sensitivity phototransistor.



RoHS

Features

- With the installation positioning boss.
- 3.0mm gap.
- Optical axis height from the mounting surface : 14.55mm.
- Slim Type.
- RoHS compliant.

Applications

- VTR.
- Cassette mecha.

Absolute Maximum Ratings (T_a=25℃, Unless otherwise specified)

Characteristic		Symbol	Ratings	Unit
Input LED	Power dissipation	P_D	75	mW
	Forward current	I_F	50	mA
	Reverse voltage	V_R	5	V
	Pulse forward current *1	I_{FP}	0.5	A
Output Detector	Collector dissipation	P_C	75	mW
	Collector current	I_C	20	mA
	C-E voltage	V_{CEO}	30	V
	E-C voltage	V_{ECO}	5	V
Rate of decrease of temp. for forward current *2		I_F / T_a	-0.67	mA/℃
Rate of decrease of temp. for collect. Dissipation *2		ΔP_c / ΔT_a	-1.00	mW/℃
Operating temperature *3		Topr.	-25 ~ +85	℃
Storage temperature *3		Tstg.	-40~ +100	℃
Soldering temperature *4		Tsol.	260	℃

*1 : Pulse width tw≤100μs period T=10ms


The contents of this data sheet are subject to change without advance notice for the purpose of improvement.
When using this product, would you please refer to the latest specifications.

*2 : Ta≥25℃ ~ Topr (max.)
*3 : No icebound or dew
*4: The soldering should be 1mm away from bottom of the holder t=within 5sec

Electrical-Optical Characteristics (T_a=25℃)

Characteristic		Simbol	Min.	Typ.	Max.	Unit	Condition
Input	Forward voltage	V_F	-	1.2	1.4	V	I_F=20mA
	Reverse current	I_R	-	-	10	μA	V_R=5V
	Peak wavelength	λ_p	-	940	-	nm	I_F=20mA
Output	Dark current	I_{CEO}	-	1	100	nA	V_{CE}=10V, L_V=0Lux
	Peak Wavelength	λ_p	-	880	-	nm	
Transmission Characteristics	Light current	I_C	0.5	-	5	mA	I_F=20mA, V_{CE}=5V Non shading
	Leakage current	I_{CEOD}	-	0.5	10	μA	I_F=20mA, V_{CE}=5V Shading
	C-E Saturation voltage	V_{CE}(sat)	-	0.15	0.4	V	I_F=20mA, I_C=0.05mA
	Rise time	tr	-	50	-	μS	V_{CE}=5V, I_C=0.1mA R_L=1kΩ
	Fall time	tf	-	50	-	μS	


* Circuit for measuring response time

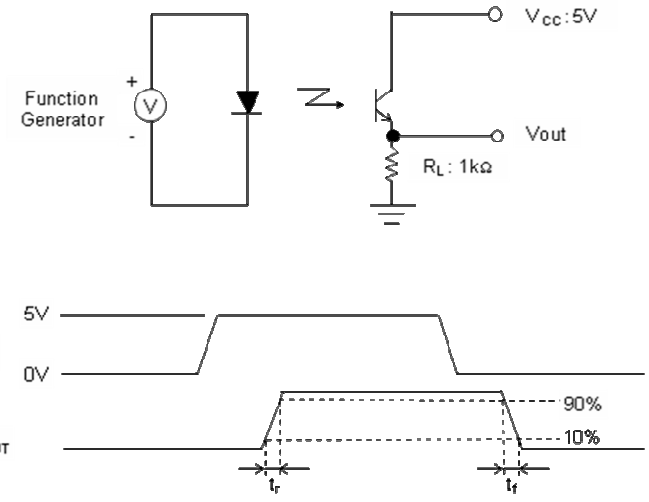

The contents of this data sheet are subject to change without advance notice for the purpose of improvement. When using this product, would you please refer to the latest specifications.

Package Outline Dimensions

(Unit : mm)

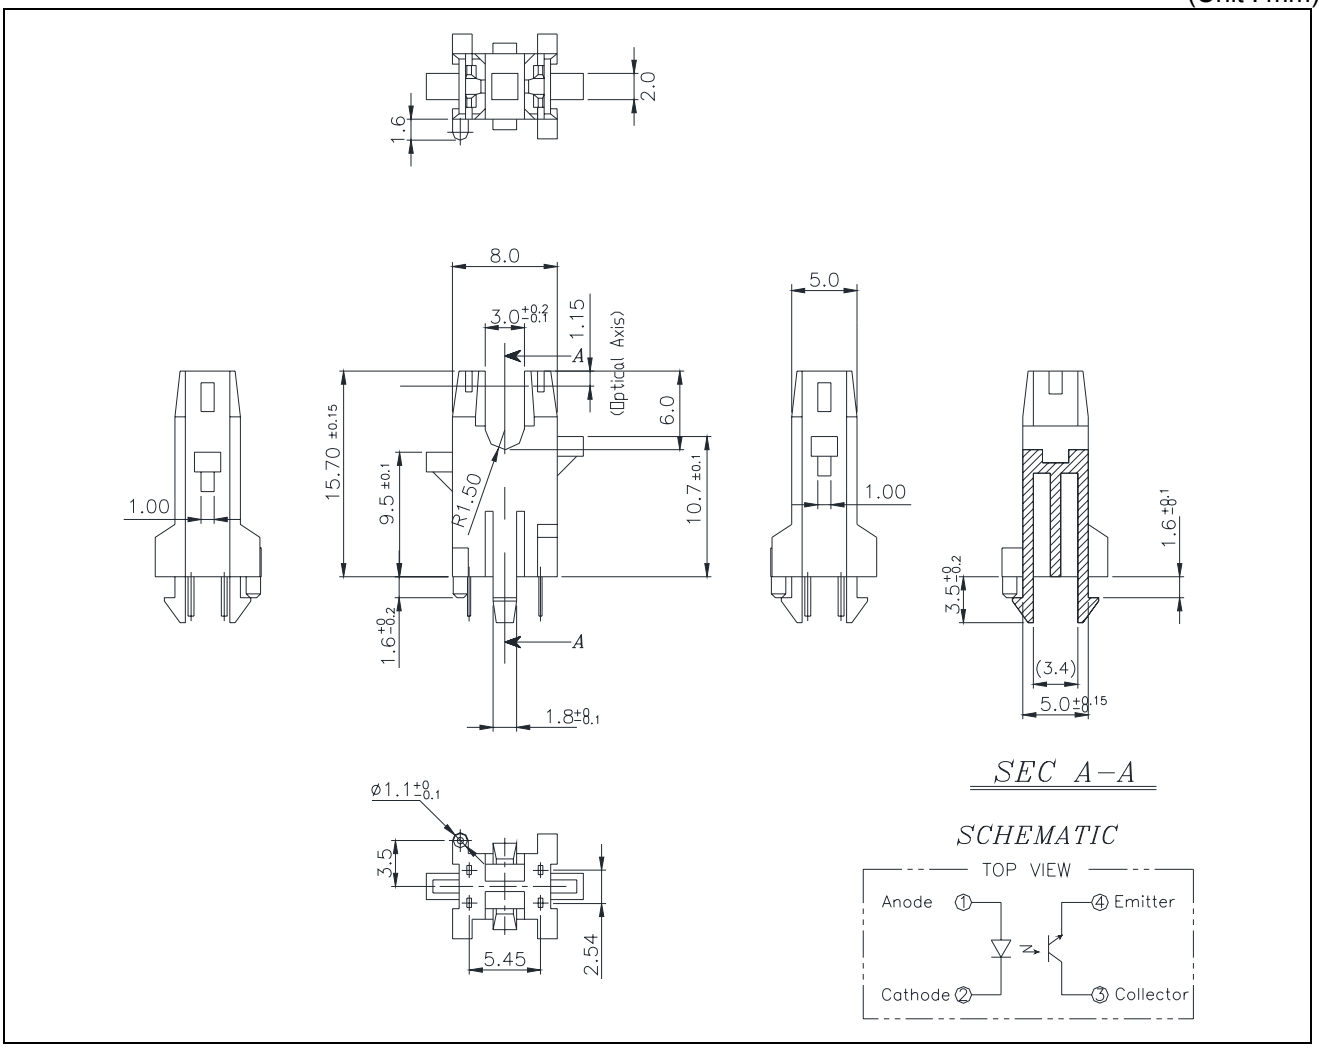

The contents of this data sheet are subject to change without advance notice for the purpose of improvement. When using this product, would you please refer to the latest specifications.