
TECHNICAL DATA SHEET

Rosenberger

ADAPTOR
FLOATING P-SMP JACK – SMA

119K732-K0BS5

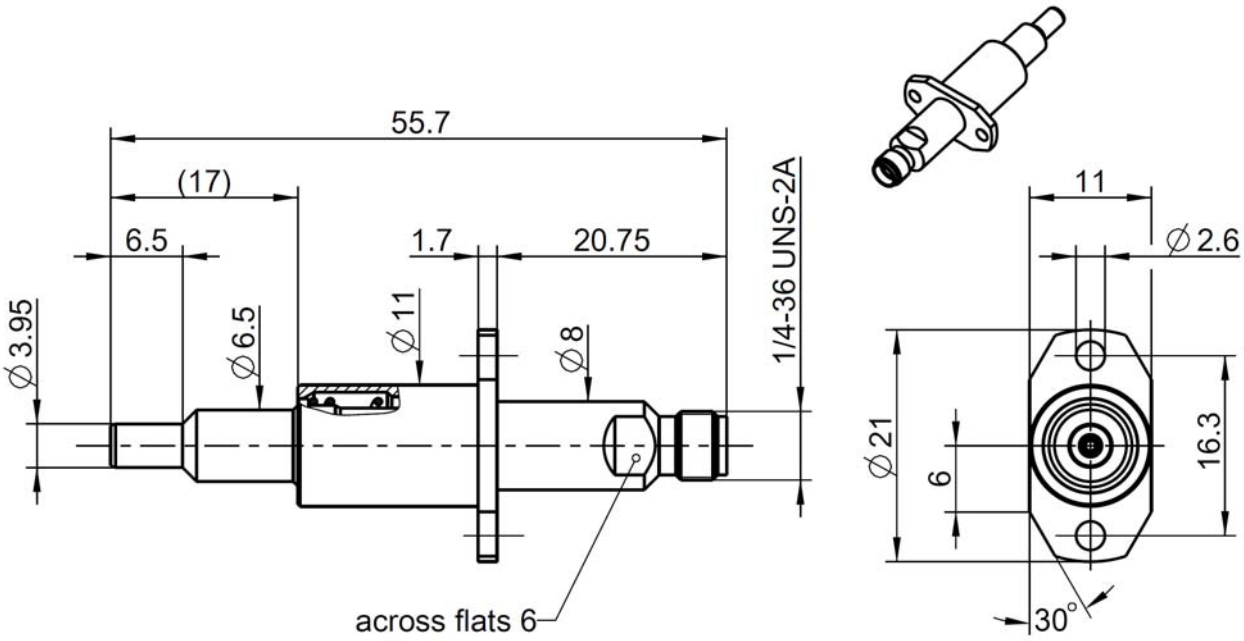

All dimensions are in mm; tolerances acc. to ISO 2768 m-H

Interface

P- SMP	Spring loaded center– and outer contact
SMA according to	IEC 60169-15; EN 122110; MIL-STD-348

Documents

N/A

Material and Plating

Connector parts	**Material**	**Plating**
Center contacts	Beryllium copper	AuroDur®, gold plated
Outer contact P-SMP side	Stainless steel	Passivated
Outer contact SMA side	Brass	Flash white bronze over silver(e.g. Optargen®)
Body	Brass	Flash white bronze over silver(e.g. Optargen®)
Spring	Stainless steel	Passivated
Dielectric	PTFE	

Dieses Dokument ist urheberrechtlich geschützt ● This document is protected by copyright ● Rosenberger Hochfrequenztechnik GmbH & Co. KG

Rosenberger Hochfrequenztechnik GmbH & Co. KG
P.O.Box 1260 D-84526 Tittmoning Germany
www.rosenberger.de

Tel.: +49 8684 18-0

email: info@rosenberger.de

TECHNICAL DATA SHEET	Rosenberger
ADAPTOR FLOATING P-SMP JACK – SMA	**119K732-K0BS5**

Electrical Data

Impedance	50 Ω
Frequency	DC to 6 GHz
Return loss	≥ 28 dB, DC to 3 GHz ≥ 18 dB, 3 to 6 GHz
Insertion loss	≤ 0.08 x $\sqrt{f(GHz)}$ dB, DC to 6 GHz
Insulation resistance	≥ 5 GΩ
Center contact resistance	≤ 3 mΩ
Outer contact resistance	≤ 2 mΩ
Test voltage	1000 V rms
Working voltage	480 V rms
Power handling (at 20 °C, sea level, VSWR 1.0)	≤ 200 W @ 2.2 GHz

Mechanical Data

	P-SMP side	SMA side
Mating cycles	≥ 1000	≥ 500
Center contact captivation: axial	≥ 15 N	
Center contact	≤ 2 N at 1.4mm spring travel	
Outer contact	≤ 8 N at 2mm spring travel	
Permissible angular misalignment	4°	
Working travel	recommended: 4.3mm maximum: 6.3mm	

Environmental Data

Temperature range	-40°C to +85°C
Rapid change of temperature	IEC 60169-1, Sub-clause 16.4 (-40°C to +85°C)
Vibration	IEC 60068-2-64 random
Shock	IEC 60068-2-27 (half-sine)
High temperature endurance	IEC 60169-1, Sub-clause 18 (+85°C, 1000 hours)
RoHS	compliant

Weight

16,8 g/pc

Dieses Dokument ist urheberrechtlich geschützt • Rosenberger Hochfrequenztechnik GmbH & Co. KG • This document is protected by copyright

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Draft	Date	Approved	Date
Huppenberger	15.12.10	S_Mühlbacher	15.02.16

Rev.	Engineering change number	Name	Date
b00	16-0004	J_Krautenbacher	15.02.16

Rosenberger Hochfrequenztechnik GmbH & Co. KG
P.O.Box 1260 D-84526 Tittmoning Germany
www.rosenberger.de

Tel.: +49 8684 18-0

email: info@rosenberger.de