


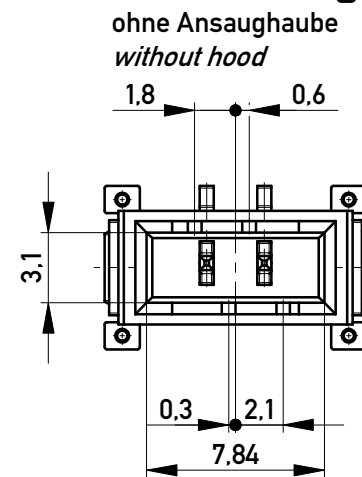
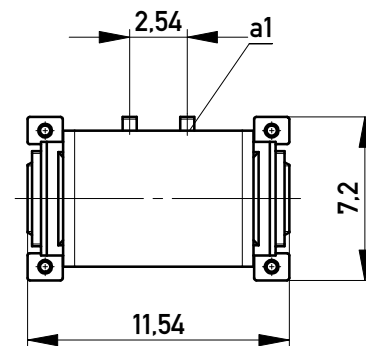
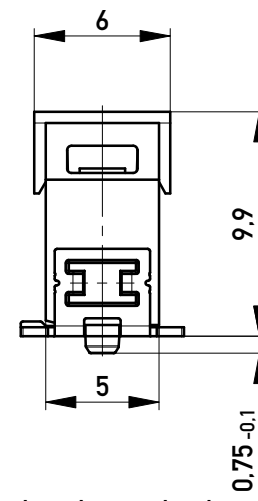


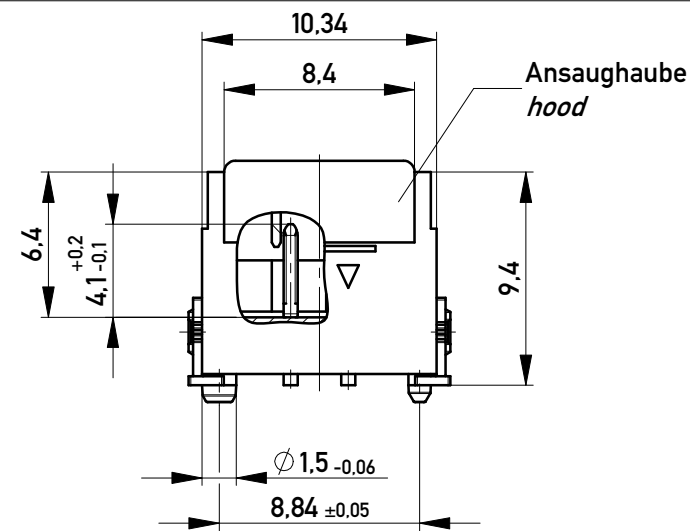

Verpackt im Gurt in Anlehnung an DIN IEC 60286-3
Tape on Reel Packaging according to DIN IEC 60286-3
 Verpackungseinheit: 320 Stück
Packaging unit: 320 pcs

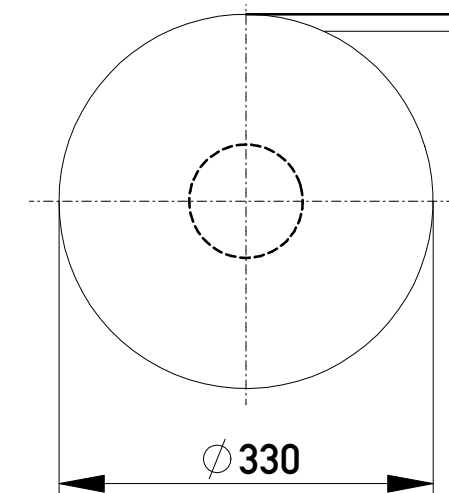

Leiterplatten-Layout Vorschlag für SMT *PCB-Layout Proposal for SMT*

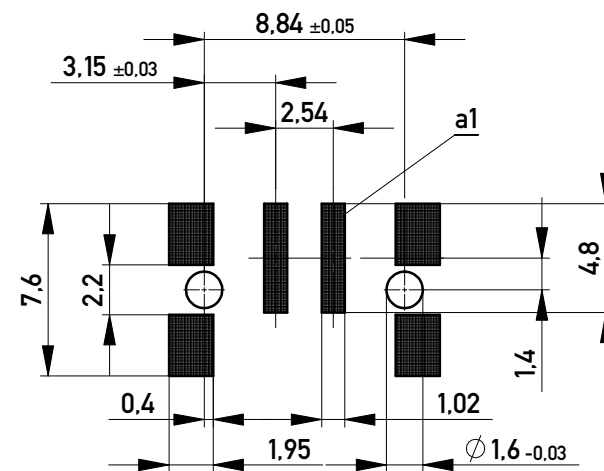


Anforderungsstufe 1
Performance Level 1

Kontaktbereich vergoldet
Mating Area gold plating

Anschlussbereich verzinnt 4-6 µm
Terminal Area 4-6 µm tin plating


Koplanarität der Anschlüsse ≤ 0,1 mm
Coplanarity Area of Termination ≤ 0,1 mm

Abspulrichtung - *Reel off Direction*

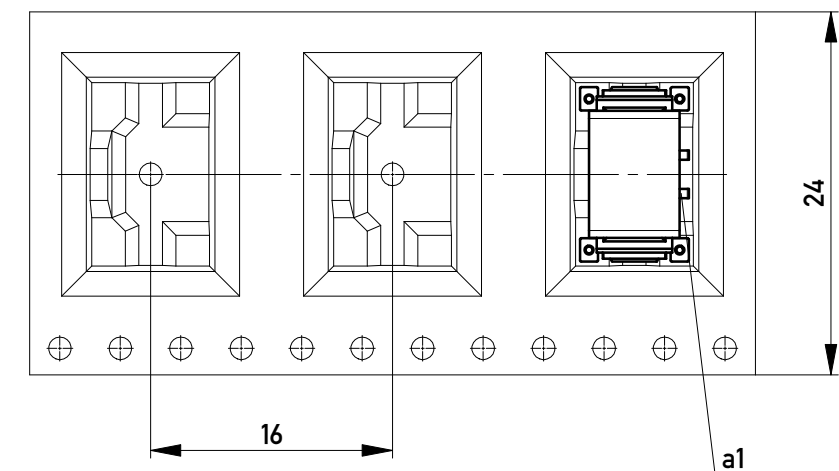

Copyright by ERNI GmbH
 Proprietary notice pursuant to ISO 16016 to be observed.

Proprietary notice pursuant to ISO 14006 to be observed.

Information: Codierung, schwarz - <i>coding, black</i>				Tolerances		 All Dimensions in mm		Scale 3:1					
All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.				Subject to modification without prior notice. Drawing will not be updated.				Designation M 2,54 SRC-P, 2-polig					
												www.ERNI.com	
g		18.02.2016						101304240001				K	
Index		Date						Class SRCP				A3	