

8KP Transient Voltage Suppressor Diode Series

General Information

The 8KP series is designed to protect voltage sensitive components from high voltage, high energy transients. They have excellent clamping capability, high surge capability, low zener impedance and fast response time. The 8KP series is supplied in YINT Semiconductor's exclusive, cost-effective, highly reliable and is ideally suited for use in communication systems, automotive, numerical controls, process controls, medical equipment, business machines, power supplies and many other industrial/consumer Applications.



Features

- P600 glass passivated chip junction
- Plastic package
- Polarity: Color band denoted positive end (cathode) except Bidirectional.
- Typical failure mode is short from over-specified voltage or current
- Fast response time: typically less than 1.0ps from 0 Volts to BV min.
- High Temperature soldering: 260°C/10 seconds at terminals.
- Solder dip 275 °C max. 10 s, per JESD 22-B106

Typical Applications

Use in sensitive electronics protection against voltage transients induced by inductive load switching and lighting on ICs, MOSFET, signal lines of sensor units for consumer, computer, industrial, automotive, and telecommunication.

Parameter	Symbol	Value	Unit
Peak pulse power dissipation with a 10/1000 μ s waveform	P_{PK}	8000	Watts
Peak pulse current with a 10/1000 μ s waveform	I_{FSM}	See next table	Amps
Instantaneous forward voltage at 100 A for Unidirectional only	V_F	3.5	V
Operating junction and storage temperature range	T_J, T_{STG}	-55 to +175	°C

Notes :


(1) Non-repetitive current pulse, per fig. 6 and derated above $T_A = 25^\circ\text{C}$ per fig. 2

(2) Measured 8.3 ms single half sine-wave or equivalent square wave, duty cycle = 4 pulses per minute maximum



Electrical Characteristics

Part Number (Bi)	Part Number (Uni)	Reverse Stand off Voltage V _R (Volts)	Breakdown Voltage V _{BR} (Volts)@I _T		Test Current I _T (mA)	Maximum Reverse Leakage I _R @ V _R (μA)	Maximum Peak Pulse Current I _{pp} (A)	Maximum Clamping Voltage V _C @ I _{pp} (V)
			Min .V	Max .V				
8KP30CA	8KP30A	30.0	33.30	36.80	5	2	160.0	50.1
8KP33CA	8KP33A	33.0	36.70	40.60	5	2	145.0	55.2
8KP36CA	8KP36A	36.0	40.00	44.20	5	2	132.5	60.4

Functional Diagram

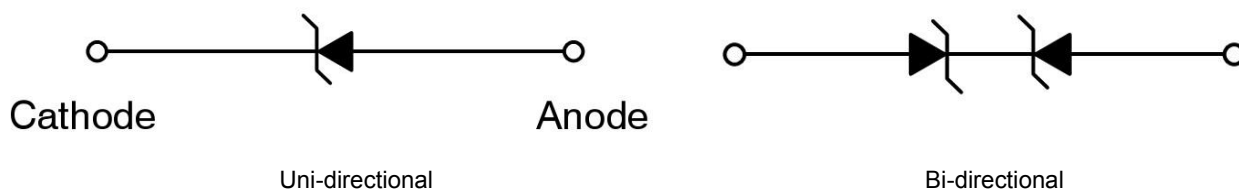

I-V Curve Characteristics

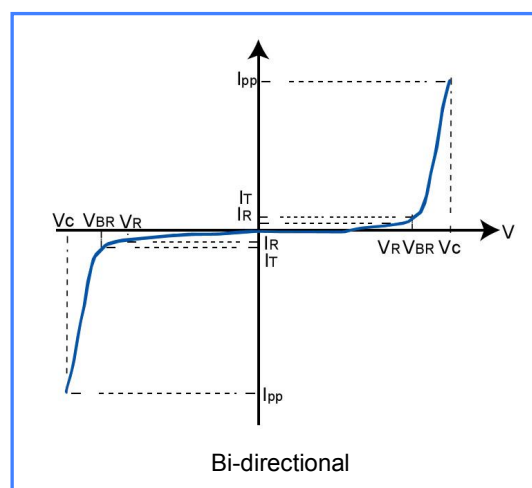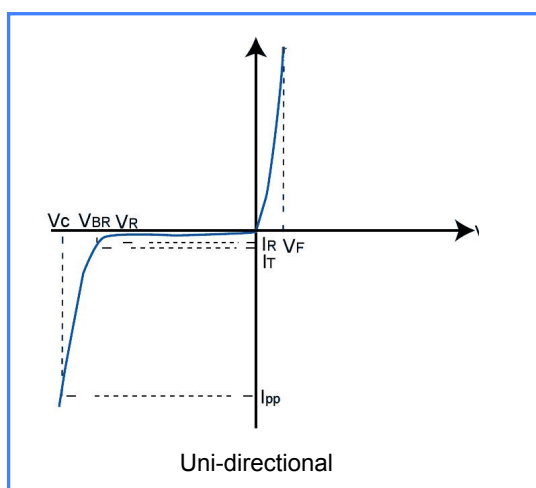

Symbol	Parameter
I_{PP}	Maximum Reverse Peak Pulse Current
V_C	Clamping Voltage @ I_{PP}
V_{RWM}	Working Peak Reverse Voltage
I_R	Maximum Reverse Leakage Current @ V_{RWM}
V_{BR}	Breakdown Voltage @ I_T
I_T	Test Current

Rating & Characteristic Curves

Figure 1 - Peak Pulse Power Rating Curve

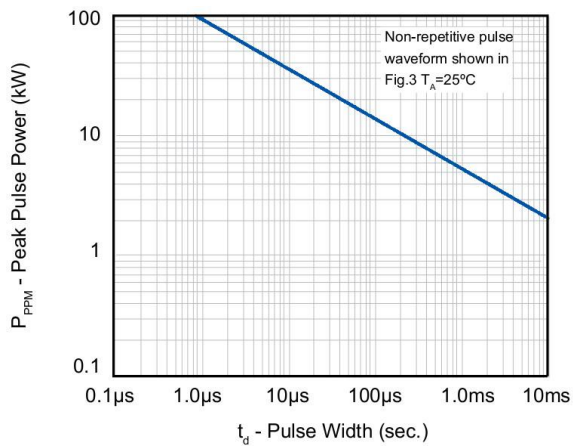


Figure 2 - Pulse Derating Curve

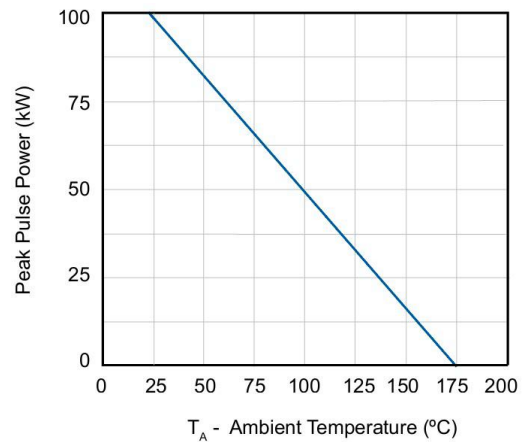


Figure 3 - Pulse Waveform

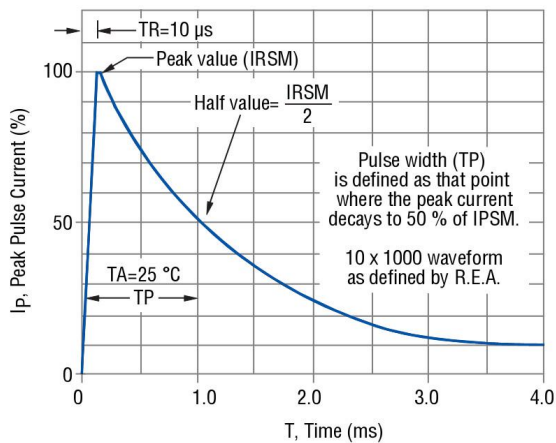


Figure 4 - Typical Junction Capacitance

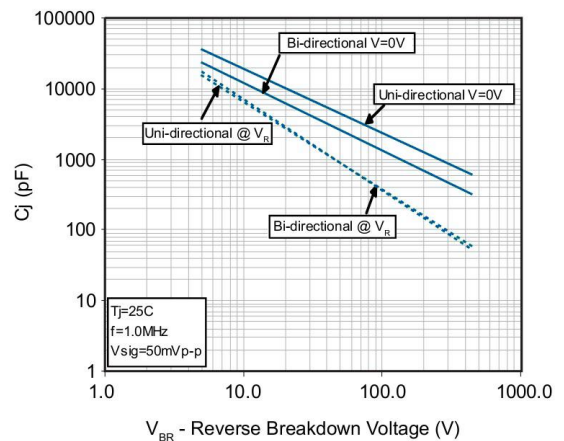


Figure 5 - Pulse Derating Curve



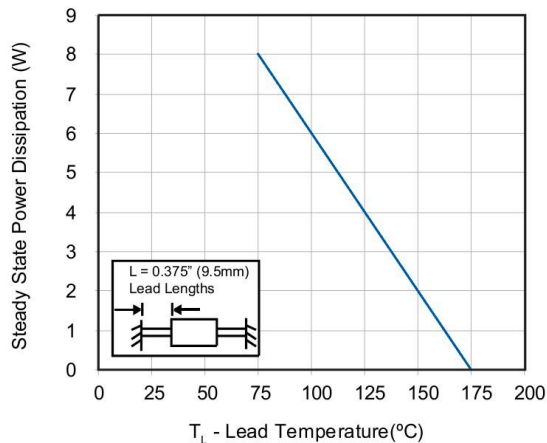


Figure 6 - Maximum Non-Repetitive Surge Current

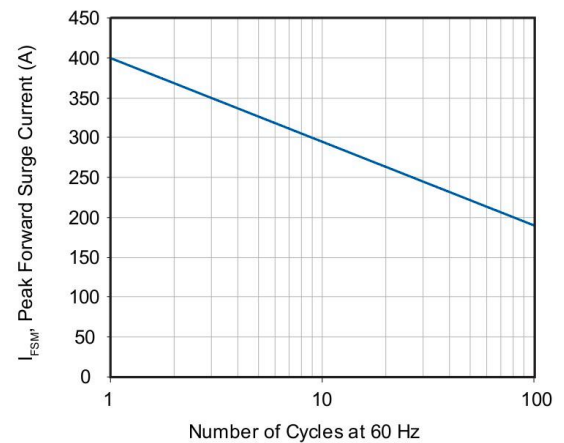

PACKAGE OUTLINE DIMENSIONS in inches (millimeters)

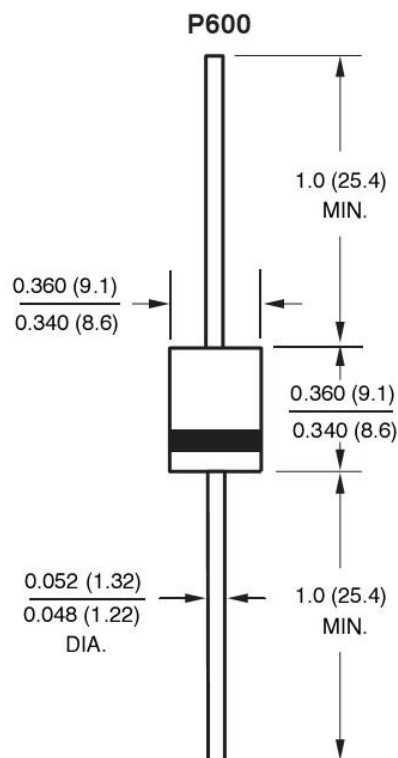

Disclaimer

Specifications are subject to change without notice.

The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time.

Users should verify actual device performance in their specific applications.