FR101GL-FR107GL

Glass Passivated Rectifiers


VOLTAGE RANGE: 50 --- 1000 V
CURRENT: 1.0 A



A - 405

Features

- ◇ Low cost
- ◇ Glass passivated junction
- ◇ Low leakage
- ◇ Low forward voltage drop
- ◇ High current capability
- ◇ Easily cleaned with alcohol,Isopropanol and similar solvents
- ◇ The plastic material carries U/L recognition 94V-0

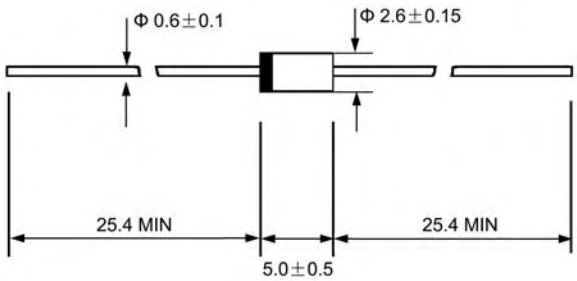

Dimensions in millimeters

Mechanical Data

- ◇ Case:JEDEC A-405,molded plastic
- ◇ Terminals: Axial lead ,solderable per MIL- STD-202,Method 208
- ◇ Polarity: Color band denotes cathode
- ◇ Weight: 0.008 ounces,0.23 grams
- ◇ Mounting position: Any

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25℃ ambient temperature unless otherwise specified.

Single phase,half wave,60 Hz,resistive or inductive load. For capacitive load,derate by 20%.

		FR101GL	FR102GL	FR103GL	FR104GL	FR105GL	FR106GL	FR107GL	UNITS
Maximum recurrent peak reverse voltage	V_{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS voltage	V_{RMS}	35	70	140	280	420	560	700	V
Maximum DC blocking voltage	V_{DC}	50	100	200	400	600	800	1000	V
Maximum average forw ard rectified current 9.5mm lead length, @T_A=75℃	$I_{F(AV)}$	1.0							A
Peak forw ard surge current 8.3ms single half-sine-w ave superimposed on rated load @T_J=125℃	I_{FSM}	30.0							A
Maximum instantaneous forw ard voltage at 1.0A	V_F	1.3							V
Maximum reverse current @T_A=25℃ at rated DC blocking voltage @T_A=100℃	I_R	5.0 100.0							μA
Maximum reverse recovery time (Note1)	t_{rr}	150				250	500		ns
Typical junction capacitance (Note2)	C_J	12.0							pF
Typical thermal resistance (Note3)	$R_{\theta JA}$	55.0							℃/W
Operating junction temperature range	T_J	- 55 ---- + 175							℃
Storage temperature range	T_{STG}	- 55 ---- +175							℃

NOTE: 1. Measured with I_F=0.5A, I_R=1A, I_{rr}=0.25A.

2. Measured at 1.0MHZ and applied reverse voltage of 4.0V DC.


3.Thermal resistance junction to ambient

FR101GL-FR107GL

Glass Passivated Rectifiers

Ratings AND Charactieristic Curves

FIG.1 -- TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTIC

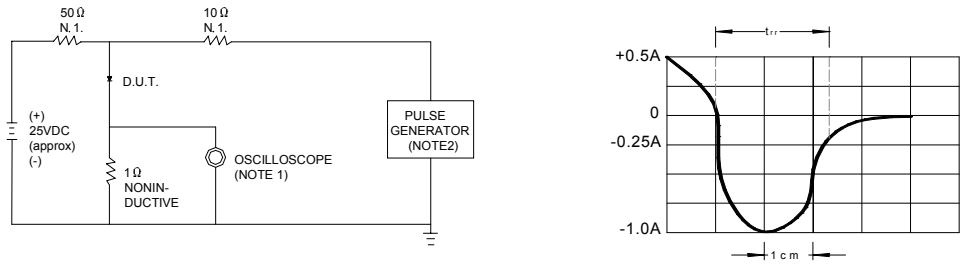

NOTES:1.RISE TIME = 7ns MAX.INPUT IMPEDANCE =1MΩ. 22pF.
2.RISE TIME =10ns MAX.SOURCE IMPEDANCE=50 Ω.

SET TIME BASE FOR 50/100 ns/cm

FIG.2 -- TYPICAL FORWARD CURRENT DERATING CURVE

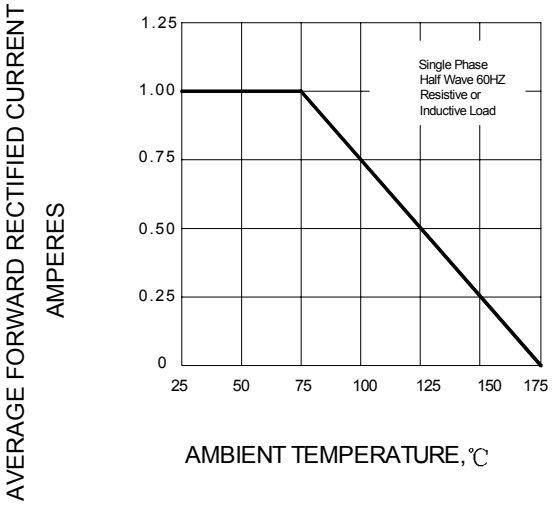


FIG.3 -- TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

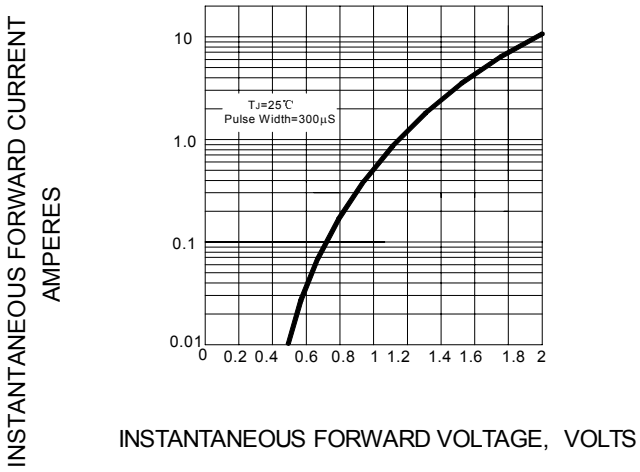


FIG.4 --PEAK FORWARD SURGE CURRENT

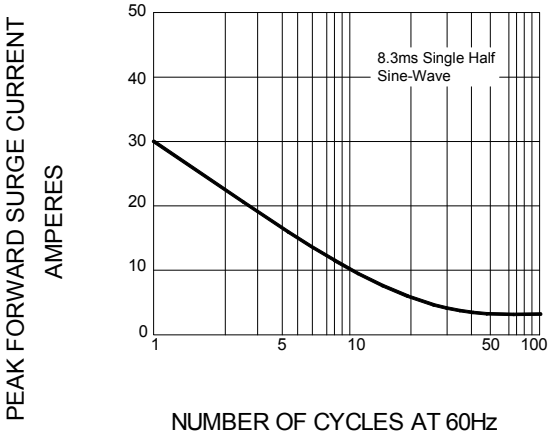


FIG.5 -- TYPICAL JUNCTION CAPACITANCE

