

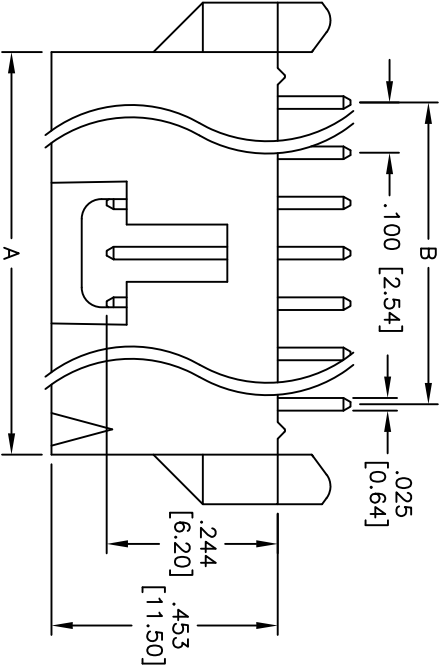
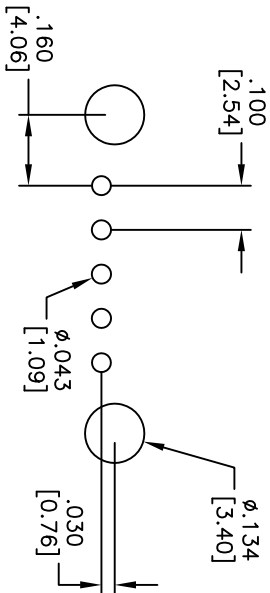


Rev	AWO #	Description	Date	Appr
-		RELEASED	10/15/09	

APPROVED: _____
 DATE: _____ TITLE: _____

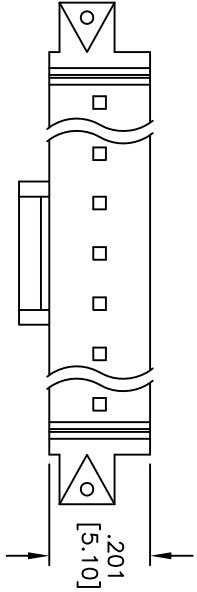

Positions: 2 thru 14
 A = .100 [2.54] x No. of Positions + .100 [2.54]
 B = .100 [2.54] x No. of Spaces

SPECIFICATIONS:

Material: Nylon 6T, glass reinforced, rated UL 94V-0
 Insulator color: Black
 Contacts: Brass
 Plating: Gold flash over Nickel underplate overall
 Electrical:
 Operating voltage: 250 VAC max
 Current rating: 2.5 Amps max
 Contact resistance: 30 mohms max
 Insulation resistance: 1,000 Mohms min
 Dielectric withstanding voltage: 600 VAC for 1 minute
 Temperature Rating:
 Operating temperature: -25°C to +85°C
 Environmental:
 Lead free, RoHS compliant
 Recommended soldering temp: 260°C for 5 seconds



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLDS
.X ± .10	ØXX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXXX ± .010
APPROVALS	DATE
DRAWN	DY
CHECKED	
APPROVED	

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .100 [2.54] LATCHING HEADER
 STRAIGHT, PCB TYPE

SIZE	PART NO.	REV.
X	CDR-XX-GS-P-HT	
REF: S0006T	SCALE: NTS	SHEET 1 OF 1