

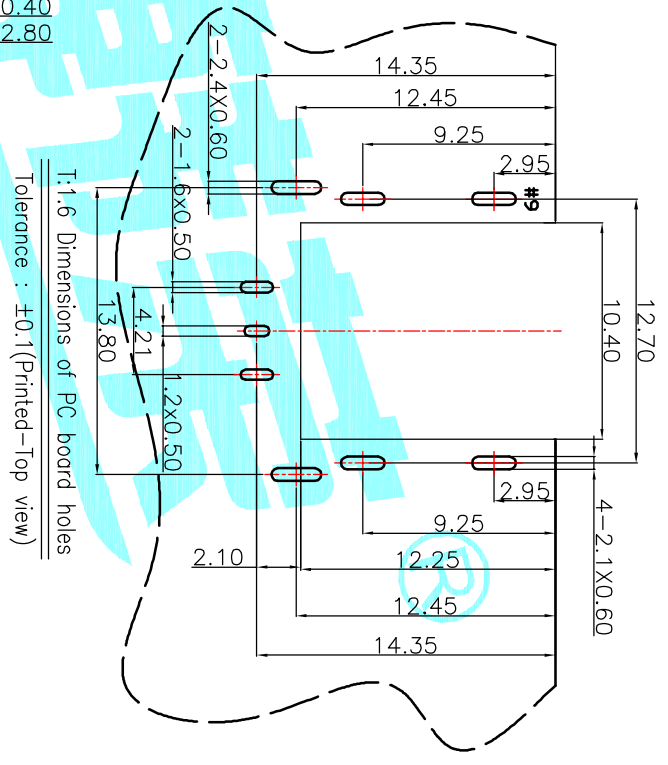


- SPECIFICATIONS:**
- ELECTRICAL CHARACTERISTICS:**
 - RATING: 20V, 7A Min.
 - CONTACT RESISTANCE: 50 MILLIOHMS Max. FOR INITIAL, 80 MILLIOHMS Max. AFTER 5000 CYCLES.
 - INSULATION RESISTANCE: 100 MEGAOHMS Min. BY 500V DC AFTER 1 MINUTE.
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V RMS AFTER 1 MINUTE.
 - MECHANICAL CHARACTERISTICS:**
 - INSERTION FORCE : 0.3~3.0 KGf(2.94~29.4N)
 - WITHDRAWAL FORCE : 0.3~3.0 KGf(2.94~29.4N)
 - LIFE TEST: 5,000 CYCLES.

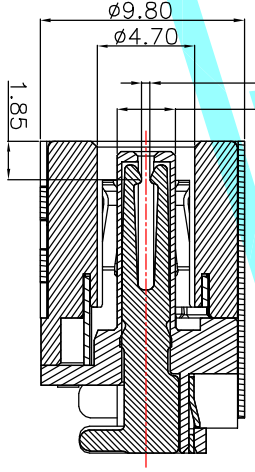

ITEM	PART NAME	TERN.O.	QTY.	MATERIAL	FINISHING	REMARK
⑥	COVER		1	NYLON	Black	
⑤	HOUSING		1	NYLON	Black	
④	SHELL		1	COPPER ALLOY	Ni Plating	
③	TERMINAL		1	COPPER ALLOY	Au Plating	
②	TERMINAL		1	COPPER ALLOY	Au Plating	
①	TERMINAL		1	COPPER ALLOY	Au Plating	

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			
<p>APPROVALS</p> <p>DRAWN JKUN.LLU DATE 2013/11/11</p> <p>CHECKED</p> <p>TOLERANCES ARE 30μ以上 ±0.30 ANGLE PART NO. DC-191</p> <p>10~30 ±0.20 UNIT: mm SCALE: 1:1 PROJ. DC POWER JACK</p> <p>5~10 ±0.15 ±Z DRAWING NO. SHEET 1 OF 1</p>						
<p>APPROVALS</p> <p>DATE</p> <p>TITLE: DC POWER JACK</p> <p>DC-191</p> <p>ELECTRONICS CO.,LTD</p>						