
This document was generated on 04/15/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: 0357201110

Status: Active

Description: 5.21mm (.205") Slip-On Receptacle Terminal, Quick Disconnect , 0.50mm (.020") Tab Thickness, Wire Range 22-24 AWG (0.33-0.20mm²), Post-Tin Plated

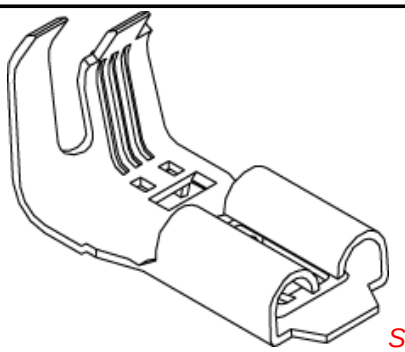

Series image - Reference only

Documents:

Drawing (PDF)

RoHS Certificate of Compliance (PDF)

Product Specification PS-35703-001 (PDF)

General

Product Family	Quick Disconnects
Series	35720
Crimp Quality Equipment	Yes
Product Name	Slip-On
Type	Quick Disconnect

Physical

Barrel Type	Open
Gender	Female
Glow-Wire Compliant	No
Insulation	None
Lock to Mating Part	Yes
Material - Metal	Brass
Orientation	Straight
Packaging Type	Reel
Polarized to Mating Part	No
Tab Thickness	0.51mm (.020")
Tab Width	5.21mm (.205")
Temperature Range - Operating	-40°C to +105°C
Wire Insulation Diameter	2.50mm (.098") max.
Wire Size AWG	22, 24
Wire Size mm²	0.20 - 0.35

Electrical

Voltage - Maximum	250V

Material Info

Reference - Drawing Numbers

Product Specification	PS-35703-001
Sales Drawing	SD-35720-11*0

EU RoHS
ELV and RoHS Compliant
REACH SVHC
Contains SVHC: No
Halogen-Free Status
Halogen-Free

China RoHS

Need more information on product environmental compliance?

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, click here


Please visit the Contact Us section for any non-product compliance questions.

Search Parts in this Series
35720Series


Use With
5.21mm (.205") Tab


This document was generated on 04/15/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

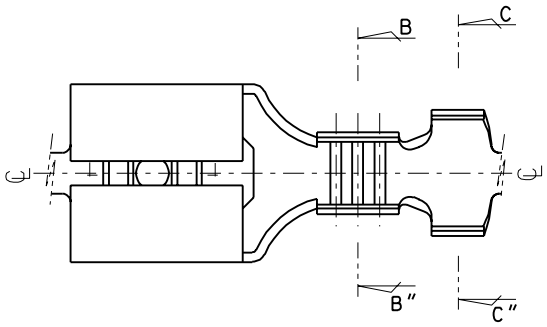



NOTES
1. MATERIAL: BRASS , 0.40mm THICKNESS
2. FINISH: 35720-1100 : UNPLATED
   35720-1110 : POST-PLATED TIN
3. RECOMMENDED LENGTH OF WIRE STRIP IS 4.1-4.6mm.

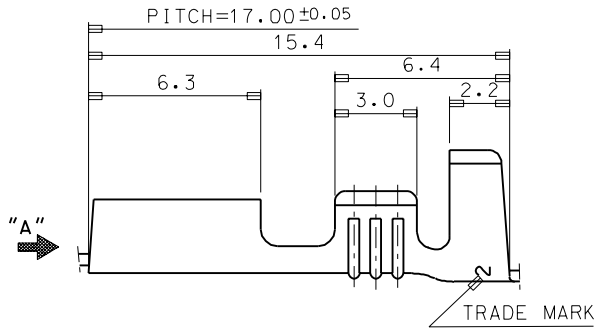




VIEW"A"

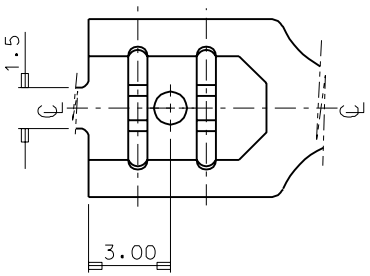



SECTION B-B"



SECTION C-C"

DO NOT SCALE DRAWING
DIMENSION IN METRIC

LTR	REVISION RECORD	ECN	DR. / CHK	DATE
A	NEW RELEASED	PDR 93-018		93 11.2

ASS'Y PART DESCRIPTION	ENG.NO.	QTY/REEL OR PACK	SURFACE AREA	MATERIAL	WIRE RANGE AWG:
		7,000 Q'TY /REEL	MM²	SEE NOTES	#24-#22 MM²: 0.20-0.33
DIE NO.		LAYOUT NO.		DIMENSION CLASSIFICATION ■▼: CRITICAL ⊠: MAJOR □: MINOR ( ): REFERENCE	
WIRE CRIMP WIDTH		INS. CRIMP WIDTH		DRAWN BY J.S.KANG	CHK'D BY B.K.CHOI
DIE FEED	APPL FEED 17.0	WBDW	IBDW	APP'D BY	SCALE 6/1

INSULATION RANGE Ø2.5 MAX.

GENERAL TOLERANCES
DIM. : ±0.30
ANGLE : ±0.20

molex MOLEX-KOREA CO.,LTD.

REVISE ONLY ON CAD SYSTEM

TITLE: .205 SLIP-ON RECEPTACLE 1 of 1

ENG.NO. SD 35720-11*0 REV A

s7201100.dgn MK-9

ENG. NO SD 35720-11*0
EDP NO.
SIMILAR ITEM
PROJECT NO.