

UF12AM series



(120 x 120 x 38 mm)

4.69 x 4.69 x 1.5 inches

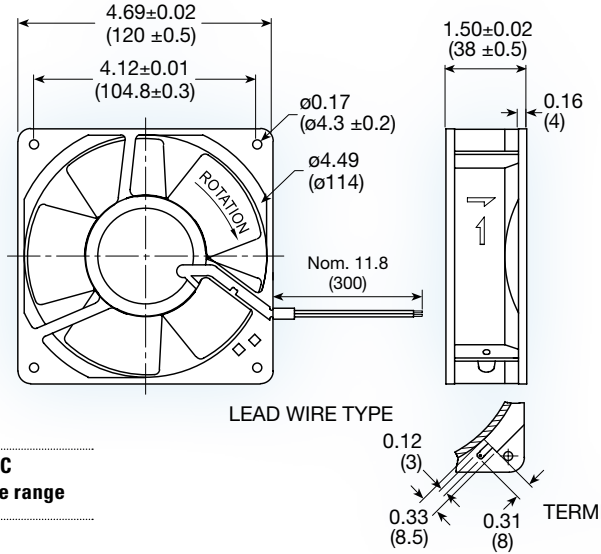

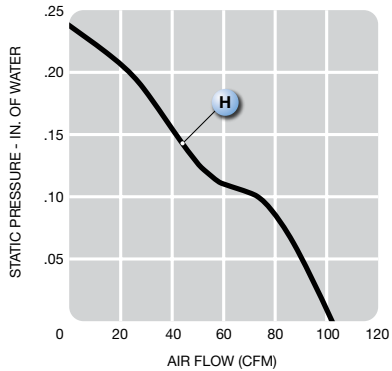

Features:	**high temp -40°C ~ 90°C operating temperature range**
Operating voltage:	115 or 230 VAC
Construction:	aluminum die cast frame; metal impeller
Bearing option:	ball bearing with high temp lubricant
Motor:	shaded pole - Class F insulation
Air Flow:	exhaust over struts
Connection:	terminal or 22 AWG lead wire
Protection:	impedance
Option:	tachometer output

Model No.	Rated Voltage	Freq.	Input Power	Rated Cur.	Locked Cur.	Speed	Air Volume		Max. Static Pressure (H_2O)		Sound Noise	Weight
	V	HZ	W	A	A	RPM	M^3/Min.	CFM	MM	INCH	dbA	kg
UF12AM12-__H	115	60	13	0.15	0.22	3,100	2.9	103	6.0	0.24	46	0.55
UF12AM23-__H	230	60	15	0.09	0.12	3,100	2.9	103	6.0	0.24	46	0.55