

SPECIFICATION FOR COTCO LED LAMP

MODEL No : LO566TYL4-70G-MT
DOC. No : A 15May03

Description:

70 Degree Oval LED Lamp in Amber
Color with Tinted Diffused Lens and
Stopper

This specification is only for Marktech

Dice Material: AlGaInP

Confirmed

by Customer: _____

Date: _____

COTCO LUMINANT DEVICE (HUIZHOU) LTD.




Web: www.marktechopto.com | Email: info@marktechopto.com

Applications:

- Variable Message Signs
- Message Board

Dimension Drawing

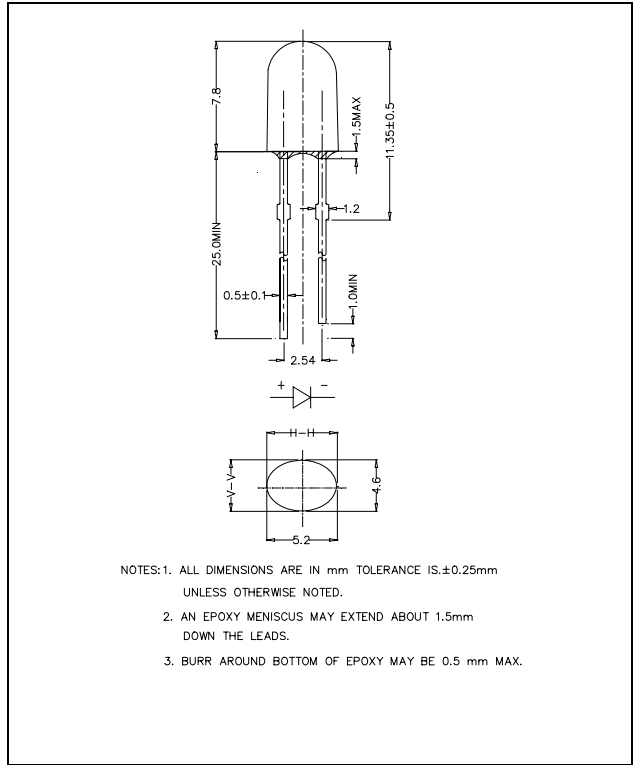

Absolute Maximum Ratings at Ta = 25°C

Items	Symbol	Absolute maximum Rating	Unit
Forward Current	I _F	50	mA
Peak Forward Current*	I _{FP}	200	mA
Reverse Voltage	V _R	5	V
Power Dissipation	P _D	150	mW
Operation Temperature	T _{opr}	-40 ~ + 95	°C
Storage Temperature	T _{stg}	-40 ~ +100	°C
Lead Soldering Temperature	T _{sol}	Max.260°C for 5 sec Max. (3mm from the base of the epoxy bulb)	

*pulse width <=0.1msec duty <=1/10

Typical Electrical & Optical Characteristics (Ta = 25°C)

Items	Symbol	Condition	Min.	Typ.	Max.	Unit
Forward Voltage	V _F	I _F = 20mA	---	2.1	2.6	V
Reverse Current	I _R	V _R = 5V	---	---	100	μA
Dominant Wavelength	λ _D	I _F = 20mA	584	591	596	nm
Luminous Intensity	I _V	I _F = 20mA	550	850	---	mcd
50% Power Angle	2θ _{1/2} H-H	I _F = 20mA	---	70	---	deg
	2θ _{1/2} V-V	I _F = 20mA	---	40	---	deg

Ranks Combination (I_F = 20mA)

Rank	R	S	T
Luminous Intensity	550-770 mcd	770-1100 mcd	1100-1520 mcd

Rank	X2	X3	X4	X5
Dominant Wavelength	584-587 nm	587-590 nm	590-593 nm	593-596 nm

Rank	V1	V2	V3	V4	V5
Voltage	1.6-1.8 V	1.8-2.0 V	2.0-2.2 V	2.2-2.4 V	2.4-2.6 V

Important Notes:

- 1) All ranks will be included per delivery, rank ratio will be determined by Cotco.
- 2) Tolerance of measurement of luminous intensity is ±15%.
- 3) Tolerance of measurement of dominant wavelength is ±1nm.
- 4) Tolerance of measurement of Vf is ±0.05 V.
- 5) Packaging methods are available for selection, please refer to PACKAGING STANDARD.
- 6) Please refer to LED LAMP RELIABILITY TEST STANDARD for reliability test conditions.

Graphs

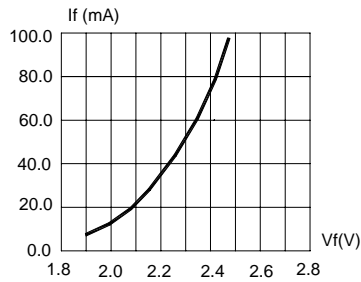


FIG.1 FORWARD CURRENT VS. FORWARD VOLTAGE.

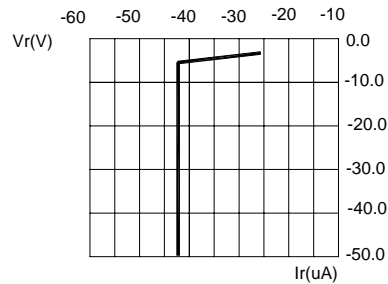


FIG.2 REVERSE CURRENT VS. REVERSE VOLTAGE.




FIG.3 RELATIVE LUMINOUS INTENSITY VS. FORWARD CURRENT.

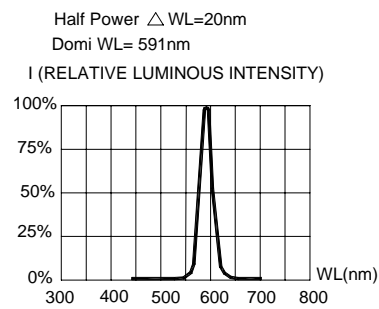


FIG.4 RELATIVE LUMINOUS INTENSITY VS. WAVELENGTH.

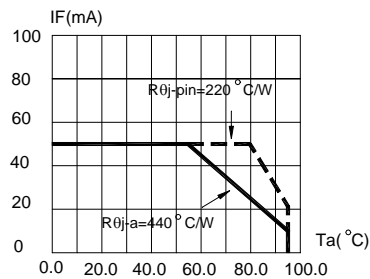


FIG.5 MAXIMUM FORWARD DC CURRENT VS AMBIENT TEMPERATURE ($T_{jmax}=105^{\circ}\text{C}$)

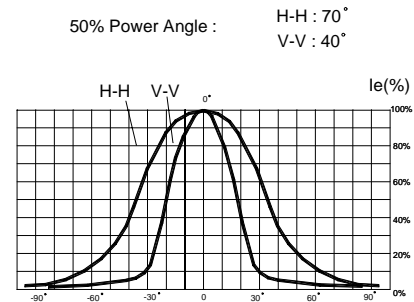


FIG.6 FAR FIELD PATTERN

1. Cathode PAD Area (0.18 X 0.18inch²)
2. Height above nominal seating plane in inches(0.3inch)

Items	Signatures	Date	Revision History	
Prepared by	LiuZM	2003/5/15	DOC. No.	CHANGE DESCRIPTION
Checked by	ZouGR	2003/5/15		
Approved by	David	2003/5/15		
ECN#	ECN-H20030157			

Data is subject to change without prior notice.

Copyright©2002 Cotco International Ltd.

Obsoletes Doc: ---