

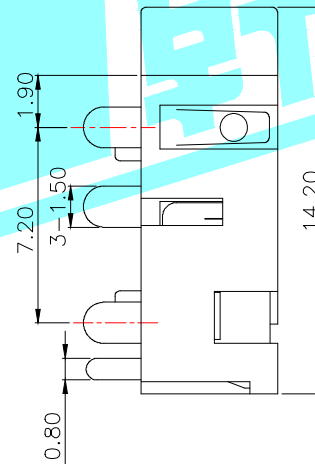
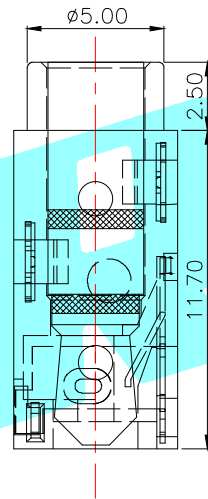


P.C.B LAYOUT (Top view)

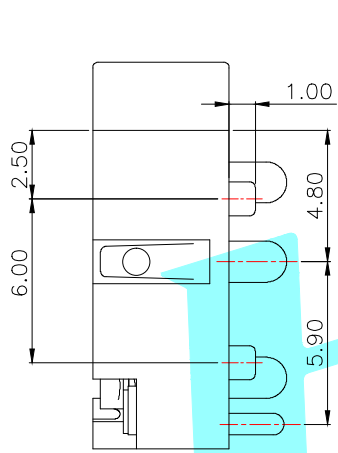

Schematic



Rating: 0.5A 30V DC  
 Contact Resistance: 30 mΩ Max.  
 Operating temperature: -30°C ~ 70°C  
 Operating force: 3-20N  
 Operating Life: 5,000 cycles

②	Terminal	—	4	Phosphor bronze	Ag Plating	—
①	Housing	—	1	PPA	Black	—
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
APPROVALS			DATE	 ELECTRONICS CO.,LTD		
DRAWN	J.X.Zhang	2013/11/11				
CHECKED				TITLE:	PHONE JACKS	
APPROVALS				PART NO.	PJ-3270-4A	
TOLERANCES ARE	30~以上	±0.30	ANGLE	UNIT: mm	SCALE: 1:1	PROJ:
	10~30	±0.20		DRAWING NO.		SHEET 1 OF 1
	5~10	±0.15				
	~ 5	±0.10				

—	A	—	NEW	—	—	—
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.