

MAIN FEATURE

1. Switching capacity 5A with two changeover contacts.
2. Insulation distance of 8mm Min. is designed.
3. Dielectric strength of 5,000V min. and surge strength 10,000V.
4. 1/8 horse power at 120VAC and 1/8 horse power at 250VAC are certified by UL.
5. TV-3 at 120VAC rating is approved by UL.
6. Halogen free series available.
7. UL Class F insulation available.
8. Comply with RoHS and REACH regulations.

CONTACT RATING

Load Type	MI-2P (DM/LM/DB/LB)	MI-2P (D/L)
Rated Load (Resistive)	5A 250VAC	5A 250VAC
	5A 30VDC	5A 30VDC
Contact Capacity	TV-3 120VAC	TV-3 120VAC
	1/8HP 120VAC/250VAC	1/8HP 120VAC/250VAC
Rated Carrying Current	5A	5A
Max. Allowable Voltage	AC 240V	AC 240V
	DC 110V	DC 110V
Max. Allowable Current	5A	5A
Max. Allowable Power Force	1,250VA	1,250VA
	150W	150W
Contact Material	Ag Alloy	Ag Alloy
Contact Form	DPST	DPDT

APPLICATION

Cooking Appliances, Air Conditioner, Audio Equipment, Domestic Appliances, Controlling Equivalent, etc.

PERFORMANCE (AT INITIAL VALUE)

- Contact Resistance 100mΩ Max. @1A, 6VDC
- Operate Time 15mSec. Max. (D Type)
20mSec. Max. (L Type)
- Release Time 8 mSec. Max.
- Dielectric Strength:
Between Coil & Contact 5,000VAC at 50/60 Hz
for one minute
Between Contacts 1,000VAC at 50/60 Hz
for one minute
- Surge Strength 10,000V (between Coil
& Contact 1.2x50μSec.)
- Insulation Resistance 100 MegaΩ Min. at
500VDC
- Max. On/Off Switching:
Electrical 6 Cycles per Minute
Mechanical 300 Cycles per Minute
- Temperature Range -30 ~ +70°C
- Humidity Range 45 ~ 85% RH.
- Coil Temperature Rise 45°C Max. (D Type)
35°C Max. (L Type)

- Vibration:
Destruction 10 to 55 to 10 Hz, 0.75 mm single
amplitude (1.5mm double amplitude)
Malfunction 10 to 55 to 10 Hz, 0.75 mm single
amplitude (1.5mm double amplitude)
- Shock:
Destruction 1,000 m/S²
Malfunction 100 m/S²
- Life Expectancy:
Mechanical 10⁷ Operations at No
Load condition
Electrical 10⁵ Operations at
Rated Resistive Load
2.5x10⁴ Operations at
TV Rated Load
- Weight About 13.8 g

ACCESSORIES & SOCKETS

- PI-50BE See Page 171
- PI-50BE/3 See Page 171
- PI-50-0 See Page 173

SAFETY STANDARD & FILE NUMBER

- UL & C-UL E141060
- TÜV R09552069
- VDE (MI-D/DM/L/LM Type) ... 40013086

COIL SPECIFICATION (AT 20°C)

Coil Sensitivity	Nominal Voltage (VDC)	Nominal Current (mA)	Coil Resistance ($\Omega \pm 10\%$)	Power Consumption (W)	Pull-In Voltage (VDC)	Drop-Out Voltage (VDC)	Maximum Allowable Voltage (VDC)
MI-2P D/DM/DB Type	3	240	12.5	Abt. 0.72	80% Maximum	5% Minimum	130%
	5	138.9	36				
	6	120	50				
	9	78.3	115				
	12	60	200				
	15	48	313				
	18	38	470				
	21	34.3	612.5				
	24	29.3	820				
MI-2P L/LM/LB Type	3	176.5	17	Abt. 0.54	80% Maximum	5% Minimum	130%
	5	100	50				
	6	88	68				
	9	58	155				
	12	44.4	270				
	15	36	417				
	18	30	600				
	21	25.7	817				
	24	21.8	1,100				
28	19.3	1,452					
48	10.9	4,400					

ORDERING INFORMATION

MI - SS - 2 12 D M F

Insulation System:

Nil: Standard Class

F: Class F

Contact Form:

Nil: Form C

M: Form A

B: Form B

Coil Type:

D: Standard DC

L: High DC

Coil Voltage:

03: 3V, **05:** 5V, **06:** 6V, **09:** 9V, **12:** 12V, **15:** 15V, **18:** 18V, **21:** 21V, **24:** 24V, **28:** 28V, **48:** 48V

Number of Pole:

2: Two Poles

Type of Sealing:

SS: RT II Flux Proofed

SH: RT III Wash Tight

Type:


MI

CLASSIFICATION

Model	MI - 2P					
	Standard DC			High DC		
Contact Form	2C	2A	2B	2C	2A	2B
Flux Proofed	MI-SS-2□□D	MI-SS-2□□DM	MI-SS-2□□DB	MI-SS-2□□L	MI-SS-2□□LM	MI-SS-2□□LB
Wash Tight	MI-SH-2□□D	MI-SH-2□□DM	MI-SH-2□□DB	MI-SH-2□□L	MI-SH-2□□LM	MI-SH-2□□LB

DIMENSION ($\leq 5\text{mm} \pm 0.2\text{mm}$, $> 5\text{mm} \pm 0.3\text{mm}$, the tolerance of PCB thru hole: $+0.1\text{mm}$)

MI-2P-SS/SH

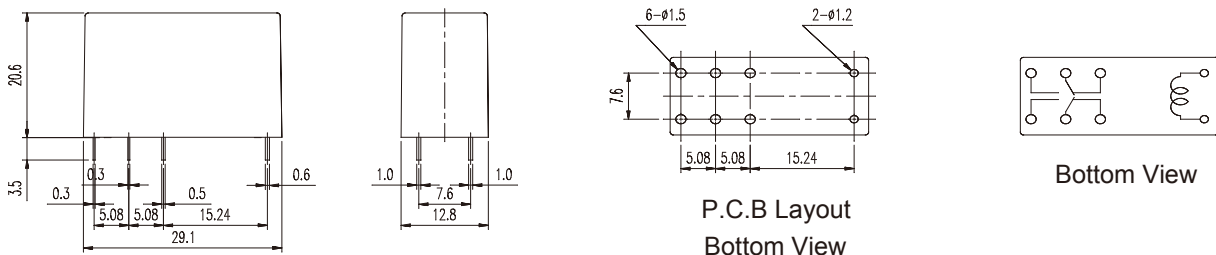

V.01EZ