

Housing - HC-STA-D07-HHFS-1STM20-EL-AL - 1419235


Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Sleeve housing D7, for single locking latch, material: Die-cast aluminum, salt water resistant, cable outlets: 1, lateral, height: 52.8 mm, cable gland: none, support sleeve: yes, 1x M20, Standard



Key Commercial Data

Packing unit	1 pc
GTIN	 4 0 5 5 6 2 6 1 5 9 6 8 3
GTIN	4055626159683

Technical data

Dimensions

Height	52.8 mm
Width	40.7 mm
Length	26.9 mm

Ambient conditions

Degree of protection	IP66
	IP67
Ambient temperature (operation)	-40 °C ... 125 °C

General

Note	for contact inserts HC-A03, A04, D07, D08, Q02, Q03, Q04, Q05, Q07, Q12
Size	D7
Housing type	Sleeve housing
Color	gray aluminum
Locking type	for single locking latch
No. of cable outlets	1
Cable outlet	lateral
Screw connection	none

Housing - HC-STA-D07-HHFS-1STM20-EL-AL - 1419235

Technical data

General


Type of the screw connection	1x M20
Housing material	Die-cast aluminum, salt water resistant
Housing surface material	uncoated

Environmental Product Compliance

China RoHS	Environmentally Friendly Use Period = 50 years
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"

Drawings

Dimensional drawing

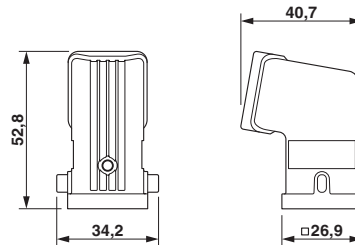

Dimensional drawing

Classifications

eCl@ss

eCl@ss 10.0.1	27440202
eCl@ss 11.0	27440202
eCl@ss 5.1	27261200
eCl@ss 6.0	27261200
eCl@ss 7.0	27440202
eCl@ss 9.0	27440202

ETIM

ETIM 6.0	EC000437
ETIM 7.0	EC000437

UNSPSC

UNSPSC 13.2	31261501
UNSPSC 18.0	31261501
UNSPSC 19.0	31261501
UNSPSC 20.0	31261501
UNSPSC 21.0	31261501

Housing - HC-STA-D07-HHFS-1STM20-EL-AL - 1419235

Approvals

Approvals

Approvals

EAC / UL Recognized / cUL Recognized / DNV GL / EAC / cULus Recognized

Ex Approvals

Approval details

EAC			RU C-DE.AI30.B.01102
-----	--	--	----------------------

UL Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	E255026
---------------	--	---	---------

cUL Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	E255026
----------------	--	---	---------

DNV GL		https://approvalfinder.dnvgl.com/	TAE000037S
--------	--	---	------------

EAC			RU C-DE.BL08.B.00511
-----	--	--	----------------------

cULus Recognized			
------------------	--	--	--

Accessories

Accessories

Corrugated pipe screw connection

Housing - HC-STA-D07-HHFS-1STM20-EL-AL - 1419235

Accessories

Screw connection - WP-G HF IP66 M20 BK - 3240898



Cable gland, metric thread, IP66 protection, straight

Screw connection - WP-G HF IP69K M20 BK - 3240884



Cable gland, metric thread, IP68/69k protection, straight

Screw connection - WP-GA HF IP66 M20 BK - 3240926



Cable gland, metric thread, IP66 protection, angled

Screw connection - WP-GA HF IP69K M20 BK - 3240912



Cable gland, metric thread, IP68/69k protection, angled

Screw connection - WP-GR HF IP66 M20 BK - 3240954



Cable gland, metric thread, IP66 protection, with strain relief

Housing - HC-STA-D07-HHFS-1STM20-EL-AL - 1419235

Accessories

Screw connection - WP-GR HF IP69K M20 BK - 3240940



Cable gland, metric thread, IP68/69k protection, with strain relief

Screw connection - WP-G PP HF M20 - 3240998



Cable gland made from PP with metric thread, IP65 protection

Screw connection - WP-GT PP HF M20 - 3241012



Cable gland made from PP with metric thread, rotatable, IP54 protection

Screw connection - WP-G BRASS IP40 M20 - 3241047



Cable gland made from brass with metric thread, IP40 protection

Screw connection - WP-GT BRASS M20 - 3241033



Cable gland made from brass with metric thread, rotatable, IP40 protection

Housing - HC-STA-D07-HHFS-1STM20-EL-AL - 1419235

Accessories

Screw connection - WP-G BRASS IP65 M20 - 3241061



Cable gland made from brass with metric thread, IP65 protection

Full screw connection

Cable gland - G-INS-M20-S68N-NNES-S - 1411163



Cable gland, cable gland material: Nickel-plated brass, external cable diameter 6 mm ... 12 mm, shielding: no, connecting thread: M20 x 1.5, color: silver, with O-ring

Cable gland - G-INSEC-M20-S68N-NCRS-S - 1411189



Cable gland, cable gland material: Nickel-plated brass, external cable diameter 9 mm ... 13 mm, shielding: yes, connecting thread: M20 x 1.5, color: silver, with O-ring

Cable gland - G-INS-M20-S68N-PNES-GY - 1411125



Cable gland, cable gland material: PA, external cable diameter 6 mm ... 12 mm, shielding: no, connecting thread: M20 x 1.5, color: silver-gray RAL 7001

Cable gland - G-INS-M20-S68N-PNES-BK - 1411133



Cable gland, cable gland material: PA, external cable diameter 6 mm ... 12 mm, shielding: no, connecting thread: M20 x 1.5, color: jet black RAL 9005

Labeled device marker

Housing - HC-STA-D07-HHFS-1STM20-EL-AL - 1419235

Accessories

Plastic label - US-EMLP (20X9) CUS - 0830085



Plastic label, can be ordered: by card, white, labeled according to customer specifications, mounting type: adhesive, lettering field size: 20 x 9 mm, Number of individual labels: 75

Phoenix Contact 2022 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>