



VLED-25W Series

Dimmable LED Drivers

Constant Current & Constant Voltage

Plastic Housing

Electrical Specifications

Input Voltage Range:	100-277 Vac Nom. (90-305 V Min/Max)
Frequency:	50/60 Hz Nom. (47-63 Hz Min/Max)
Power Factor:	>0.90 @ full load, 100V through 277V
Inrush Current:	60 Amps max @ 230 Vac, cold start 25°C
Input AC Current:	0.4 A max @ 100Vac, 0.2 A max @ 220Vac
Maximum Power:	26W
THD:	≤ 20% @ full load
Line Regulation:	± 1% Constant Current, ± 2% Constant Voltage
Load Regulation:	± 3%
Leakage Current:	0.75 mA max @ 277Vac 60Hz
Turn-on Delay:	0.6S @ 110Vac, 0.3S @ 220Vac Typical
Ripple and Noise:	3-4% V _o
Protection:	Over-Voltage, Over-Current, Over-Load and Short Circuit Protection with self-recovery

Environmental Specifications

Minimum Starting Temp:	-40°C
Maximum Case Temp.	90°C
Storage Temperature:	-40°C to +85°C
Humidity:	5% to 100%
Cooling:	Convection
Sound Rating:	Class A
MTBF:	200,000 Hr (cc) or 130,000 Hr (cv) @ 110Vac, 80% load and 25°C (MIL-HDBK-217F)
Lifetime:	91,000 Hours @ 120Vac, 80% load and 60°C ambient
EMC:	FCC 47CFR Part 15 Class B compliant
Weight:	200 g

Ordering Options:

-D: 0-10V dimmable version comes with an extra three wires +Purple/-Gray/Yellow on the output side. 0-10V Dimming is compatible with most quality 0-10V wall dimmers and direct 0-10V analog signal. See page 2 for additional specifications.



- Total Power: 25 Watts
- Input Voltage: 100-277 Vac Nom.
- UL Dry & Damp Location Rated
- IP66
- High Power Factor with Active Correction
- Output Protection & Lightning Protection
- UL8750 and EN61347

Constant Current - Product Specifications

Model Number	Output Current (mA ±5%)	Output Voltage Range (Vdc)	Max. Output Power (W)	Typical Efficiency
VLED25W-075-C0350-XX	350	38-75	26	86%
VLED25W-056-C0450-XX	450	28-56	26	85%
VLED25W-037-C0700-XX	700	19-37	26	85%
VLED25W-025-C1050-XX	1050	13-25	26	84%
VLED25W-019-C1400-XX	1400	10-19	26	82%
VLED25W-015-C1750-XX	1750	8-15	26	81%

-XX indicates dimming options are available. See options at left. Blank = fixed current output

Constant Voltage - Product Specifications

Model Number	Output Voltage (Vdc ±5%)	Output Current Range (mA)	Max. Output Power (W)	Typical Efficiency
VLED25W-024	24	0-1080	26	84%
VLED25W-036	36	0-720	26	85%
VLED25W-048	48	0-540	26	86%

Class 2: US/Canada US Only









Note:

LED drivers are designed and intended to operate LED loads only. Non-LED loading may be outside the specified design limits of our LED drivers, and therefore cannot be covered by any warranty. If you desire to use our LED drivers to operate non-LED loads please contact us to discuss compatibility.







Specifications subject to change without notice.

Rev 8-25-15

Power Factor Characteristics *(constant current models)*

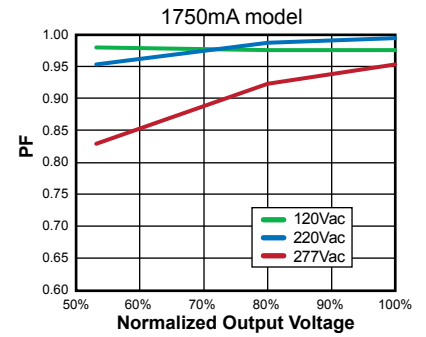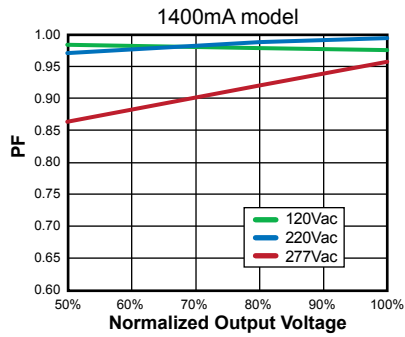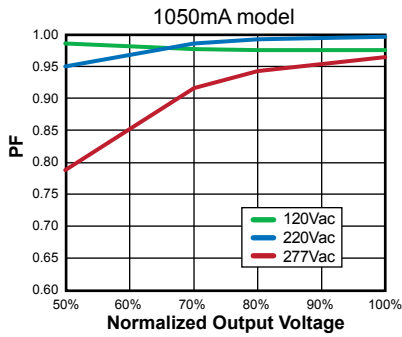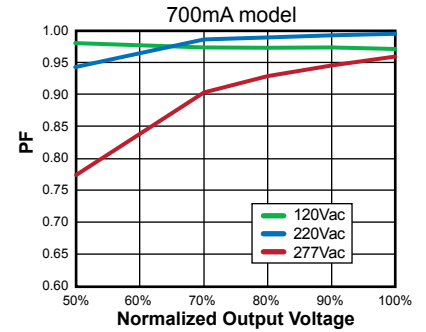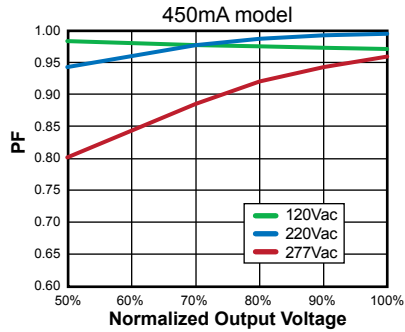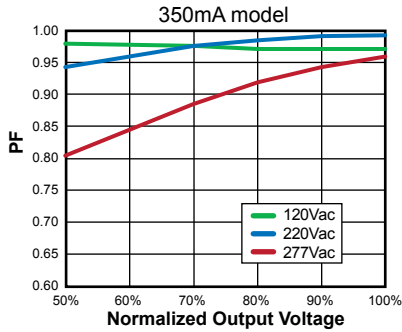

Efficiency / Load *(constant current models)*

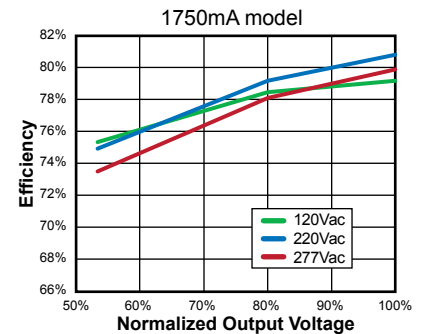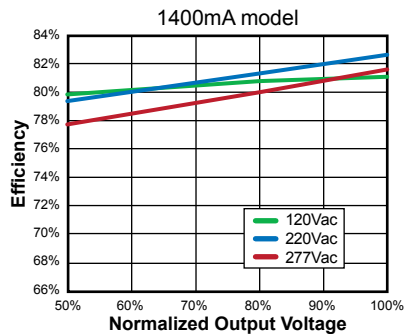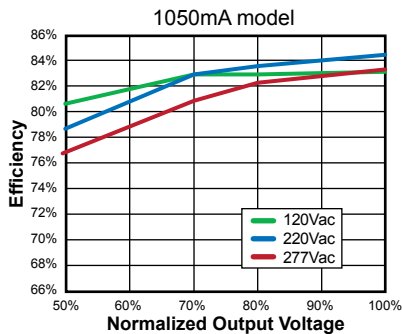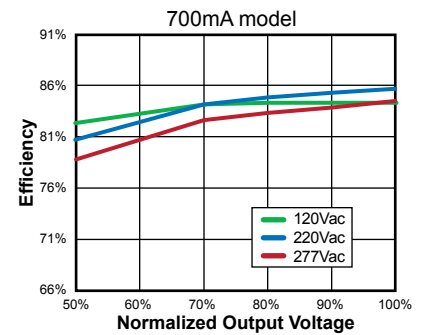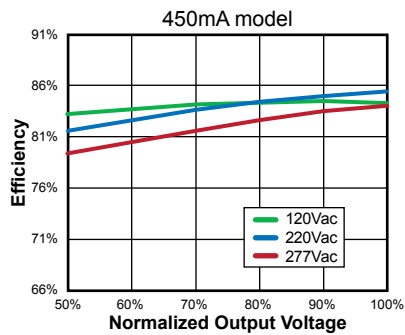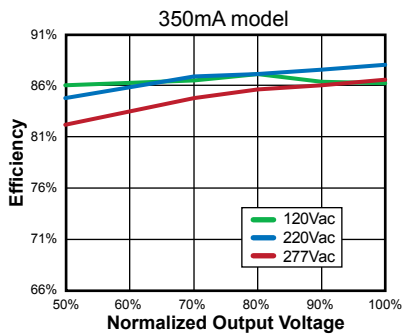


Dimming Control


The dimmer control is operated from an input signal of 1 – 10 Vdc. Recommended implementation provided below.

Parameters	Minimum	Typical	Maximum
12V output voltage	10.8V	12V	13.2V
12V output source current	0 mA	—	20mA
Absolute maximum voltage on the 1-10v input pin	0V	—	15V
Source current on 1-10V input pin	0µA	—	200µA

Typical Analog 0-10V Dimming Circuit



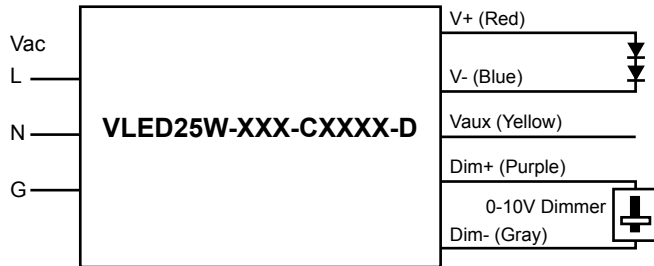


Output Current / Dimming Voltage

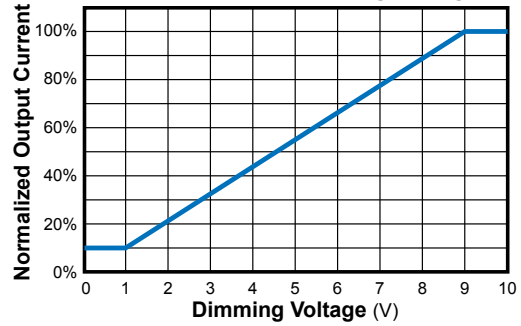

Note: Do not connect Dim- to V-

Power Factor Characteristics (constant voltage models)

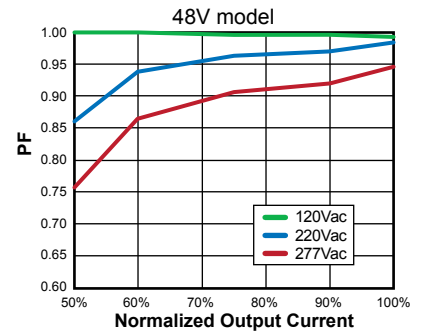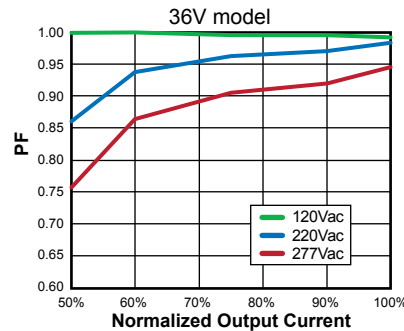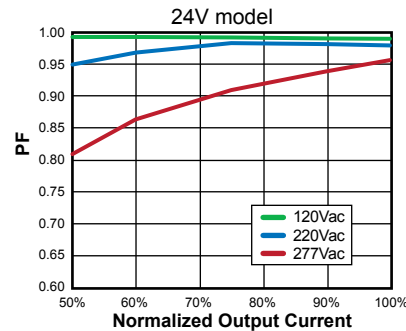

Efficiency / Load (constant voltage models)

