


Electrical Specifications at 25°C


Parameter			Units
Impedance	PRI.	600	$\Omega$
R Load	SEC.	294	$\Omega$
Turns Ratio		1:1	
Direct Current in Pri. (DCI)	maximum	0	mA
DC Resistance	PRI. $\pm 10\%$	180	$\Omega$
	SEC. $\pm 10\%$	156	$\Omega$
Insertion Loss	max., ref. 1 kHz	2.7	dB
Return Loss	min., 300 Hz to 3.5 kHz	30	dB
Longitudinal Balance	min., 300 Hz to 3.5 kHz	60	dB
Frequency Response	200 Hz to 5 kHz	$\pm 0.2$	dB
T.H.D.	typ. 600 Hz, -10 dBm	-83	dB
Isolation	minimum	1000	$V_{RMS}$

# PCMCIA Modem Transformer

Schematic Diagram

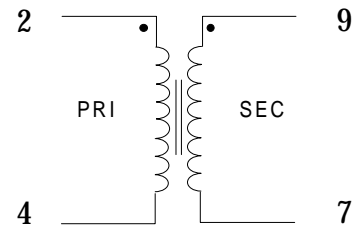

Physical Dimensions  
inches (mm)

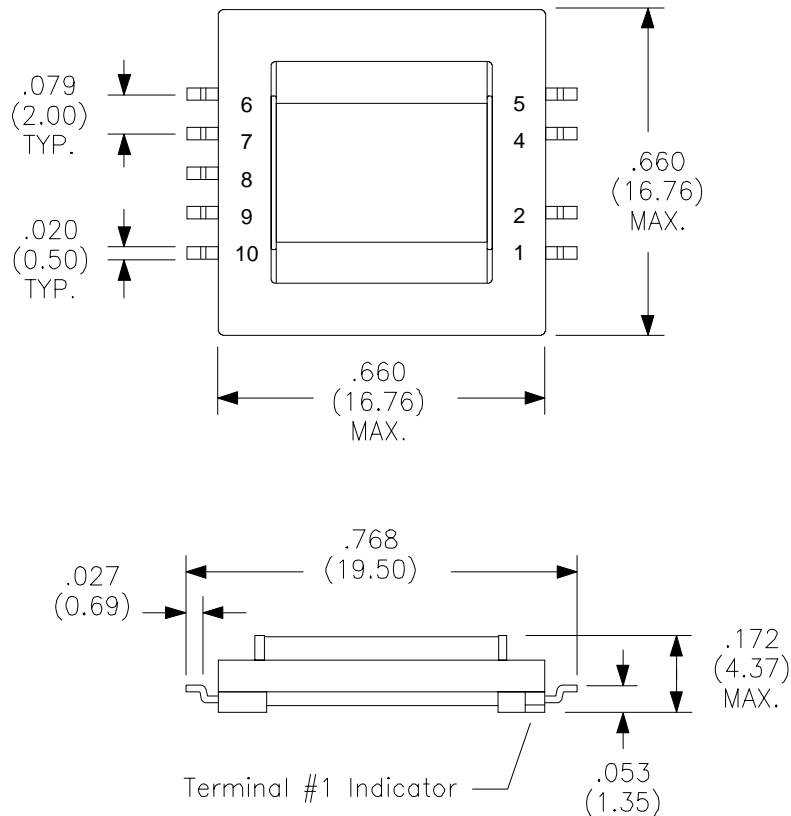

RHOMBUS P/N: <b>T-787</b>	
CUST P/N:	NAME:
DATE: <b>7/23/96</b>	SHEET: 1 of 1