


HONEYWELL PART NUMBER
111SM1-T
PRODUCT CODE TYJ0160

REV	DOCUMENT	CHANGED BY	CHECK
10	0038225	PRS 04APR08	BLR

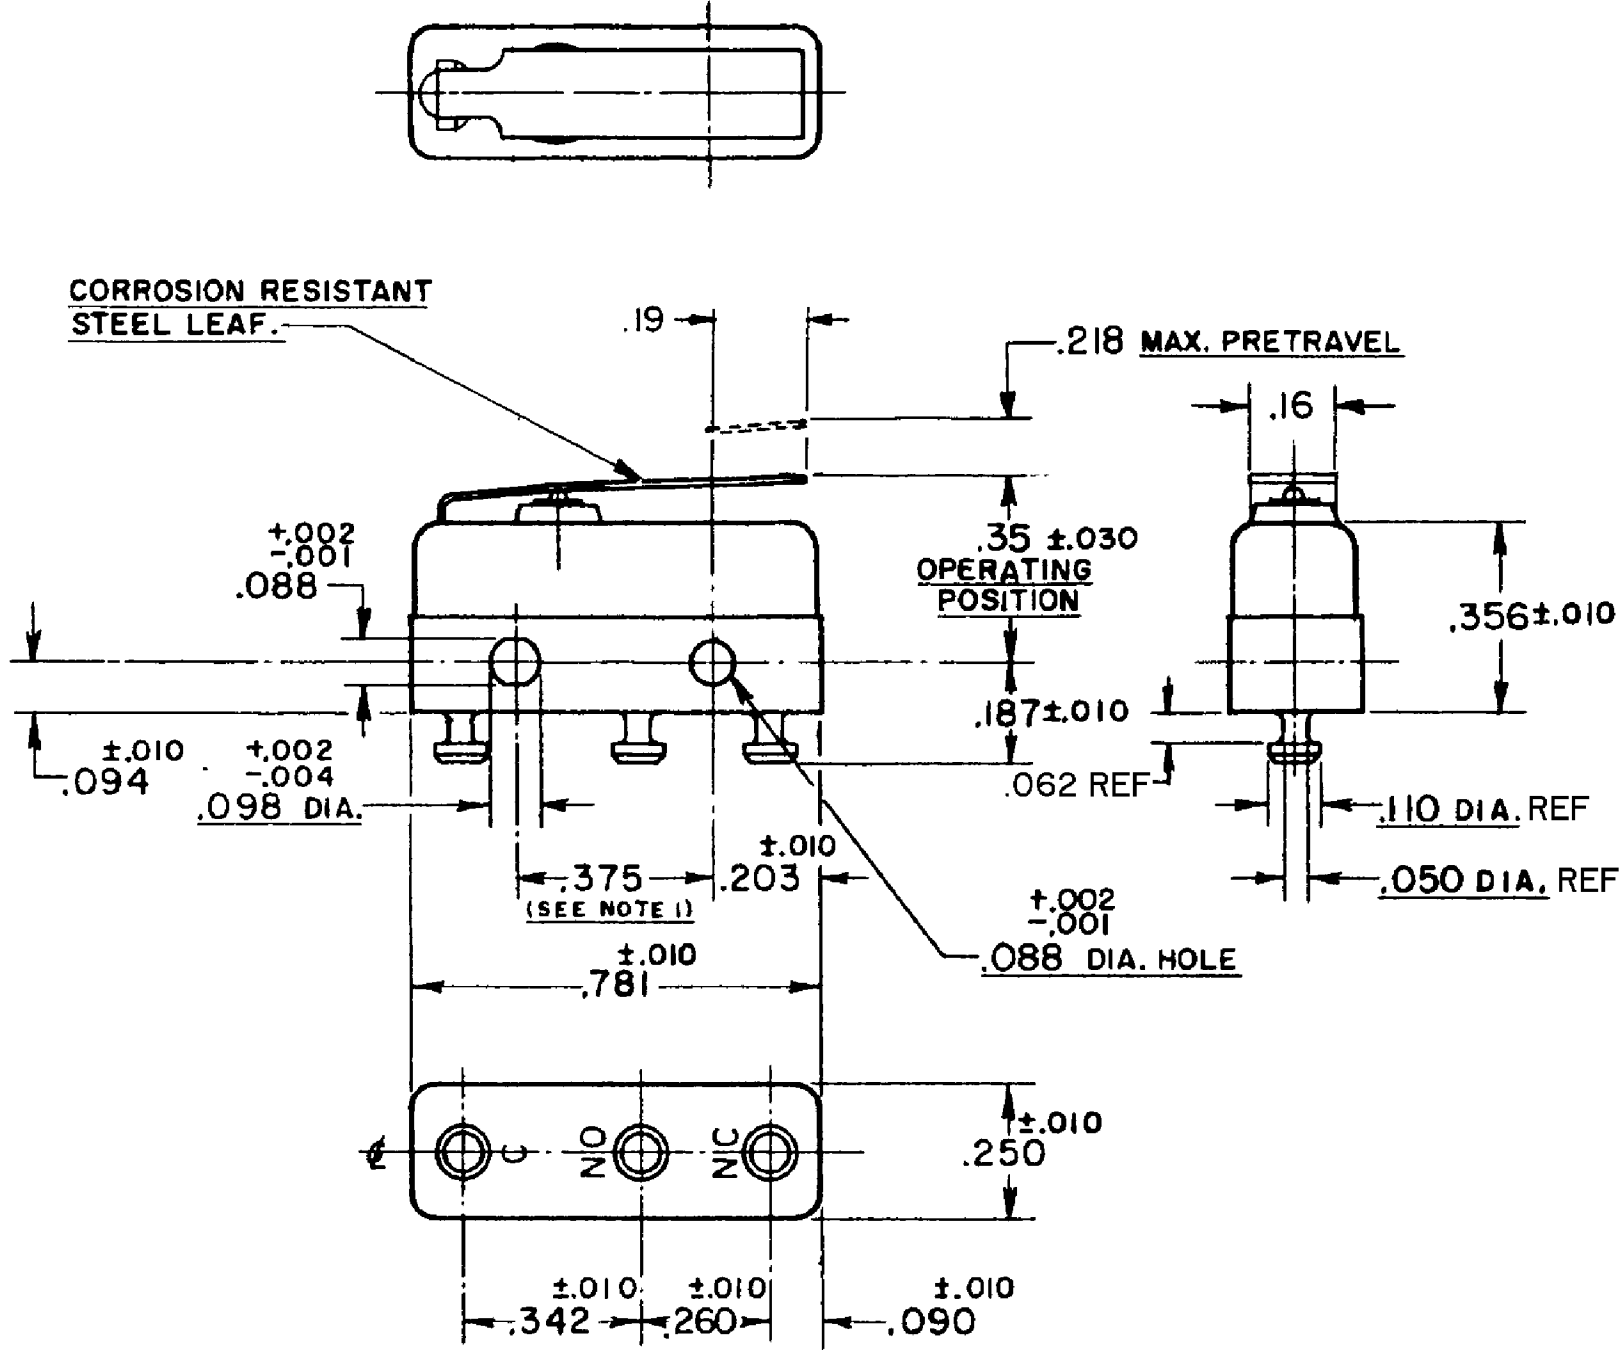

- NOTES**
- 1- MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX. DIA. ON .375^{±.002} CENTERS.
 - 2- TERMINALS ARE PLATED FOR SOLDERING.

RELEASE NO. SR - 7729

REPLACES -

CHARACTERISTICS	ELECTRICAL DATA	DESIGN UNITS: INCH TOLERANCES UNLESS NOTED:	DRAWN VK 23 OCT 07	Honeywell			
OPERATING FORCE - - - - 7 OZ MAX	CONTACT ARRANGEMENT SPDT	NO PLACE X ± -	CHECK RJ 23 OCT 07				
RELEASE FORCE - - - - 2 OZ MIN	30 VOLTS DC RATING	ONE PLACE .X ± 0.030	THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.		TITLE SWITCH - BASIC		
DIFFERENTIAL TRAVEL - - .030 MAX	SEA LEVEL 50,000 FT	TWO PLACE .XX ± 0.015					
OVERTRAVEL - - - - .030 MIN	INDUCTIVE 3 AMP 2.5 AMP	THREE PLACE .XXX ± 0.005	INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY		SIZE B	TYPE I	DRAWING NAME 111SM1-T
	RESISTIVE 5 AMP 5 AMP	FOUR PLACE .XXXX ± -			SCALE -	WEIGHT .006 LB MAX	REV 10
	MAXIMUM INRUSH 24 AMP	ANGLES ± -	RASTER		SHEET 1 OF 1		
	APPROVALS KEMA, CE 5A, 250V ~ T85 1E4 UL, CSA 5A, 250 VAC ~	THIRD ANGLE PROJECTION					