








宏聚电子五金制品有限公司

HONGJU ELECTRONIC & METAL PRODUCTS CO.,LTD

S-03-12-1



Rating: 15A 250V AC (UL CUL) **UL**_{US}
 10A 250V AC (VDE CCC)
 Insulation Resistance: DC 500V 100MΩ Min.
 Dielectric Strength: AC2000V 1 minute
 MATERIAL:
 Body:Nylon66
 Terminal:Brass,Silver or Tin plated

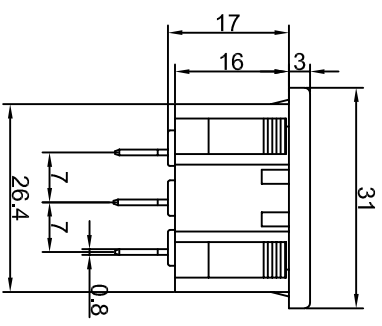

CUT-OUT

		公差 TOLERANCES		.X±0.3 .XX±0.15		角度 ANGLE ±1°		单位 DIMENSION UNIT		mm.	
		版本 VERSION		A0		日期 DATE		品名 TITLE		图号 DRAWING NO	
		核 准 APPROVED BY		Xinchao_Lee		核 对 CHECKED BY		S-03-12-1		S-03-12-1_A0	
		日期 DATE		2008.07.08		比例尺 SCALE		S-03-12-1			
		ECN NO.		N/A		NONE		S-03-12-1			
版本 VER.		变更说明 CHANGE DESCRIPTION		日期 DATE		核 对 CHECKED BY		S-03-12-1		S-03-12-1_A0	
A0		New Issue		2008.07.08		Gokey_Guo		S-03-12-1		S-03-12-1_A0	