

# SPECIFICATIONS


Current Rating: 3Amps  
 Insulator body: L C P  
 Insulator Resistance: 5000Mw Min  
 Dielectric Withstanding: DC 500V  
 Contact Resistance: 20MW Max  
 Durability: 100gf Cycles Min  
 Contact Material: Copper alloy  
 Finish : Tin Gold or Duplex plated  
 Standard: Gold flash all over Nickel  
 Operating Temperature: -55°C+105°C  
 Max.Processing Temp: 230°C for 30-60 seconds  
 (260°C for 10 seconds)

注明:带号码球的为检验尺寸,带▲为重要检验尺寸


# Ordering Information

7420 08 M S3 B T 04


No. of Pins  
 Connector Type  
 Contact Plating  
 Insulator Color  
 S=Straight  
 G0:Gold Flash  
 B=Black  
 R=Right Angle  
 G2:1.5U" Gold  
 G=Grey  
 M=SMT  
 G3:2U" Gold  
 G4:3U" Gold  
 G5:5U" Gold  
 S0:Gold Flash/Tin  
 S3:5U"Gold Flash/Tin  
 SN:Tin

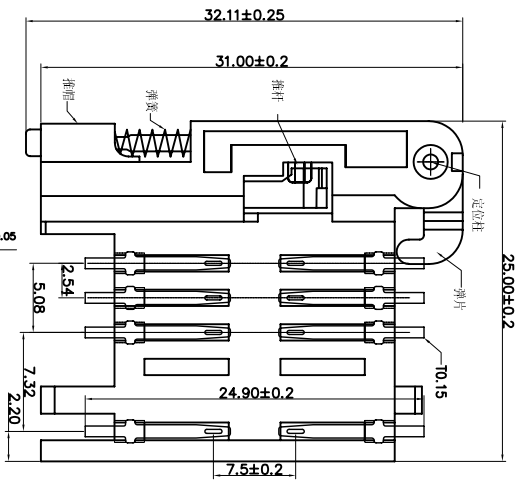

主体

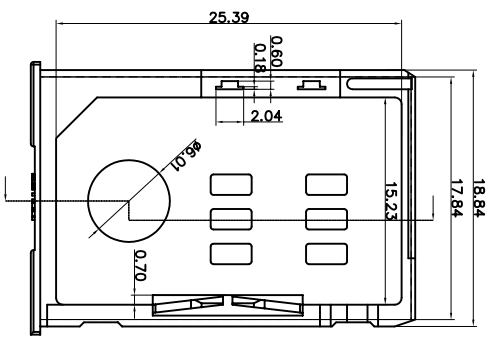

后盖

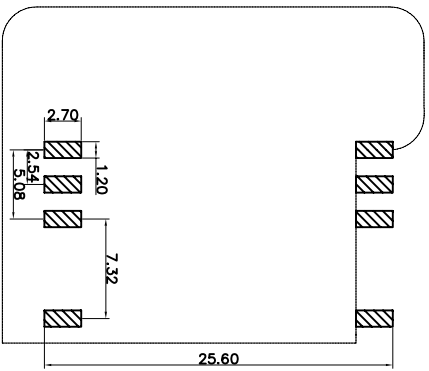

RECOMMEND P. C. BOARD LAYOUT  
 PCB TOLERANCE:±0.05 (TOP VIEW)

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL	APPROVE	SCALE	FIT	PART NO.	TITLE:
A0	2012.09.11	NEW DRAWING		X:XXX	±0.10	CHECK	A4	1/1	742008MS3BET04	A卡座 8P
1										

1	2	3	4	5	6	7	8	9
---	---	---	---	---	---	---	---	---