
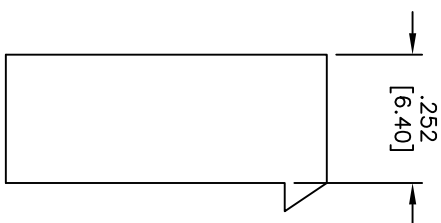
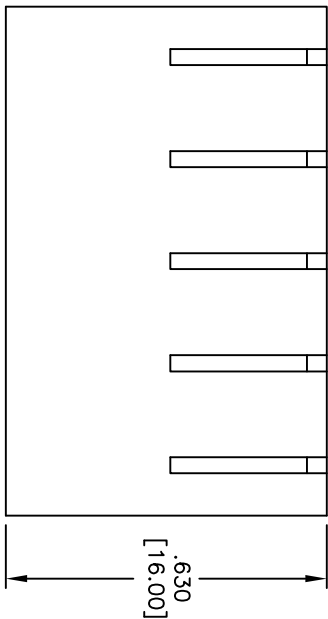


Rev	AWO #	Description	Date	Appr
-		RELEASED	11/3/10	

APPROVED: _____
 DATE: _____ TITLE: _____

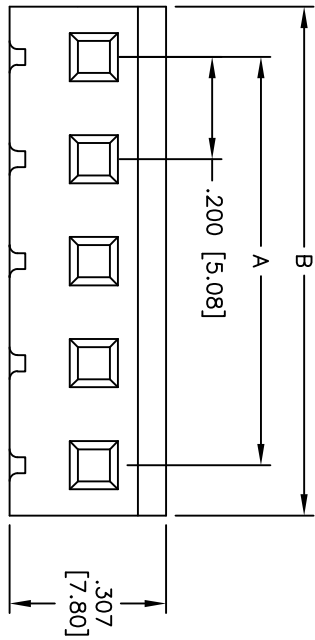

Positions: 2 thru 12
 A = .200 [5.08] x No. of Positions
 B = .200 [5.08] x No. of Spaces

SPECIFICATIONS:
 Material: Insulator: Nylon 66, glass reinforced, UL94V-2
 Insulator color: Natural
 Electrical: Voltage rating: 250V AC/DC
 Current rating: 5A AC/DC
 Insulation resistance: 1,000 Mohms min
 Dielectric withstanding voltage: 1,500 VAC for 1 minute
 Temperature Rating: Operating temperature: -25°C to +85°C
 Environmental: Lead free, RoHS compliant

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLES
.X ± .10	ØX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXX ± .010
APPROVALS	DATE
DRAWN AY	11/3/10
CHECKED VW	11/3/10
APPROVED	

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE	.200 [5.08] PITCH CRIMP CONTACT HOUSING	
SIZE	PART NO.	REV.
X	MTF-B-XX	-
REF:	S00015T	SCALE: NTS
		SHEET 1 OF 1