


6	7	8
REVISION	DESCRIPTION	DATE
A0	首次发行	21.05.14
		DRAFTER
		S. He

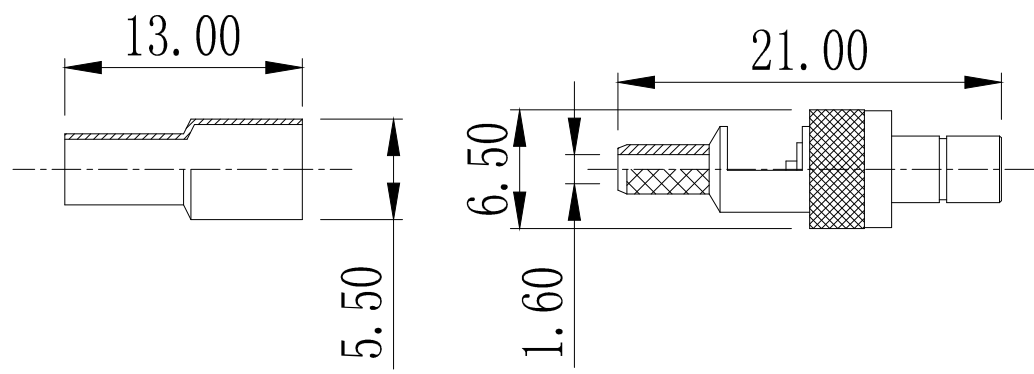

电气性能 (ELECTRICAL CHARACTERISTICS)	
绝缘电阻 (Insulation resistance)	≥1000MΩ
额定电压	250V
接触电阻 (Contact resistance)	内导体 (Center contact) : ≤ 5mΩ
	外导体 (Outer contact) : ≤ 2.5mΩ

2	2LC10PM601-9	镀金尾管	1
1	2LC10PM601-1	SMB-J179, 直式公头公针, 主体镀金	1
No.	PART NAME	SPECIFICATION DESCRIPTION	Q' TY
GENERAL TOLERANCE:		HJ-Tech 东莞市皇捷通讯科技有限公司	
LINEAR:		手机: 15015262131/13714786106	
X	±0.20	FILE NAME:	零件图
X.X	±0.15	TITLE:	SMB-J179, 直式公头公针, 主体镀金, L13.0xOD6.5mm+镀金尾管
X.XX	±0.05	ENG/DATE:	S. He/21.05.14
X.XXX	±0.01	CHE/DATE:	
ANGLE:		P/N:	HJ-SMA-J179-SAM
X°	±4.00°	APP/DATE:	
X.X°	±3.00°	UNIT:	mm
X.XX°	±2.00°	SCALE:	1:1
X.XXX°	±1.00°	REVISION:	A0
		SHEET:	1/1

COMPLIANCE WITH THE REQUIREMENT:  RoHS;  HF;  SONY SS-00259;  OTHERS  
 \*NO USING ESTRICTED AND BANNED SUBSTANCE