



DPH-1

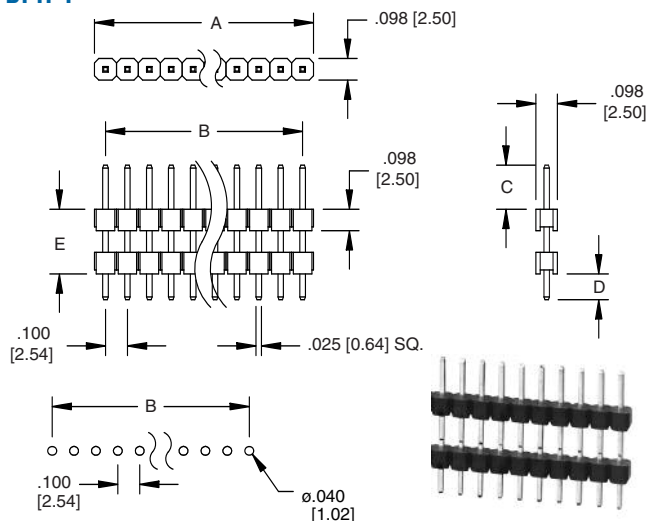

Recommended PCB Layout

DPH-1-10-U-.220/.100/.350


DPH-1-SMT

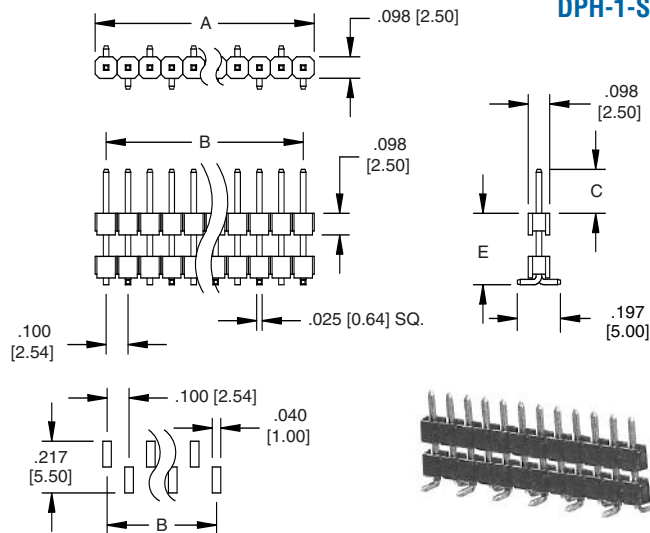

Recommended PCB Layout

DPH-1-12-U-.200/SMT/.220-A


DPH-2

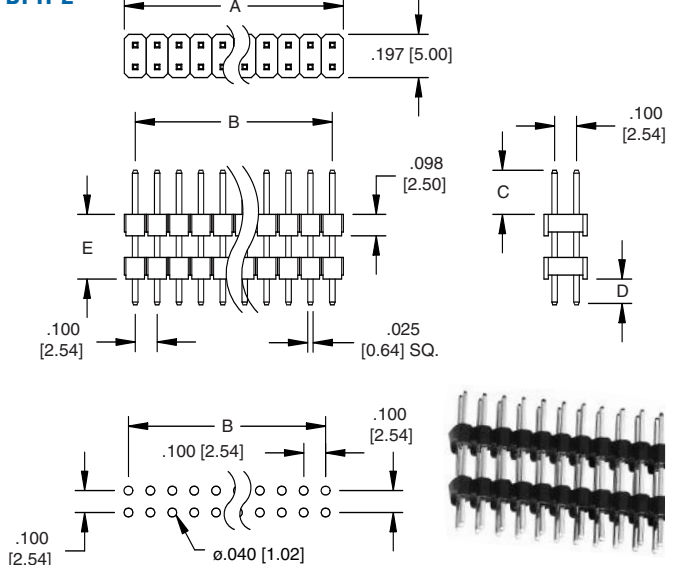

Recommended PCB Layout

DPH-2-22-U-.220/.100/.350

DPH-2-SMT

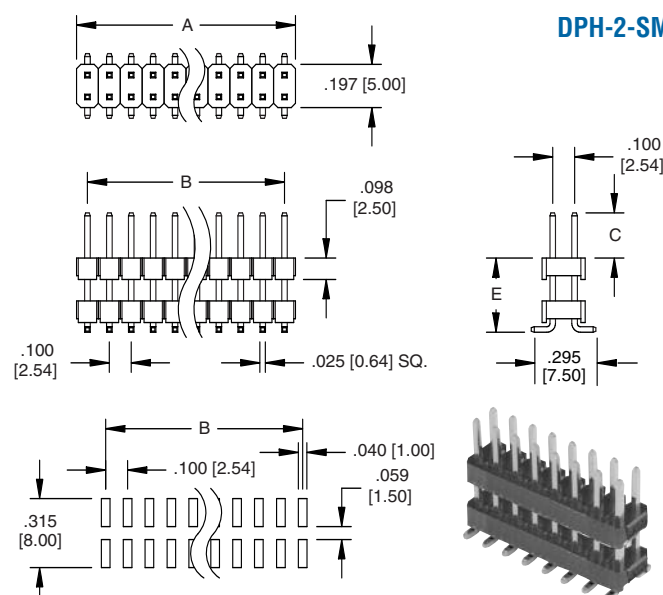

Recommended PCB Layout

DPH-2-16-U-.250/SMT/.300

ORDERING INFORMATION

DPH

SERIES INDICATOR
DPH = Dual insulator
.100" centerline

2

NO. OF ROWS
1 = Single row
2 = Dual row
3 = Triple row

20

POSITIONS
1 thru 40 (single row)
4 thru 80 (dual row)
3 thru 120 (triple row)

SG

PLATING
U = Gold plated
T = Tin plated
SG = Gold plating in contact area, tin plating on solder tails

.XXX"/.XXX"/.XXX"
(C DIM) (D DIM) (E DIM)

SPECIFIED IN INCHES AS:
C Dim. / D Dim. / E Dim.
(replace D Dim. with SMT for surface mount option)