



Ausführung / DESIGN

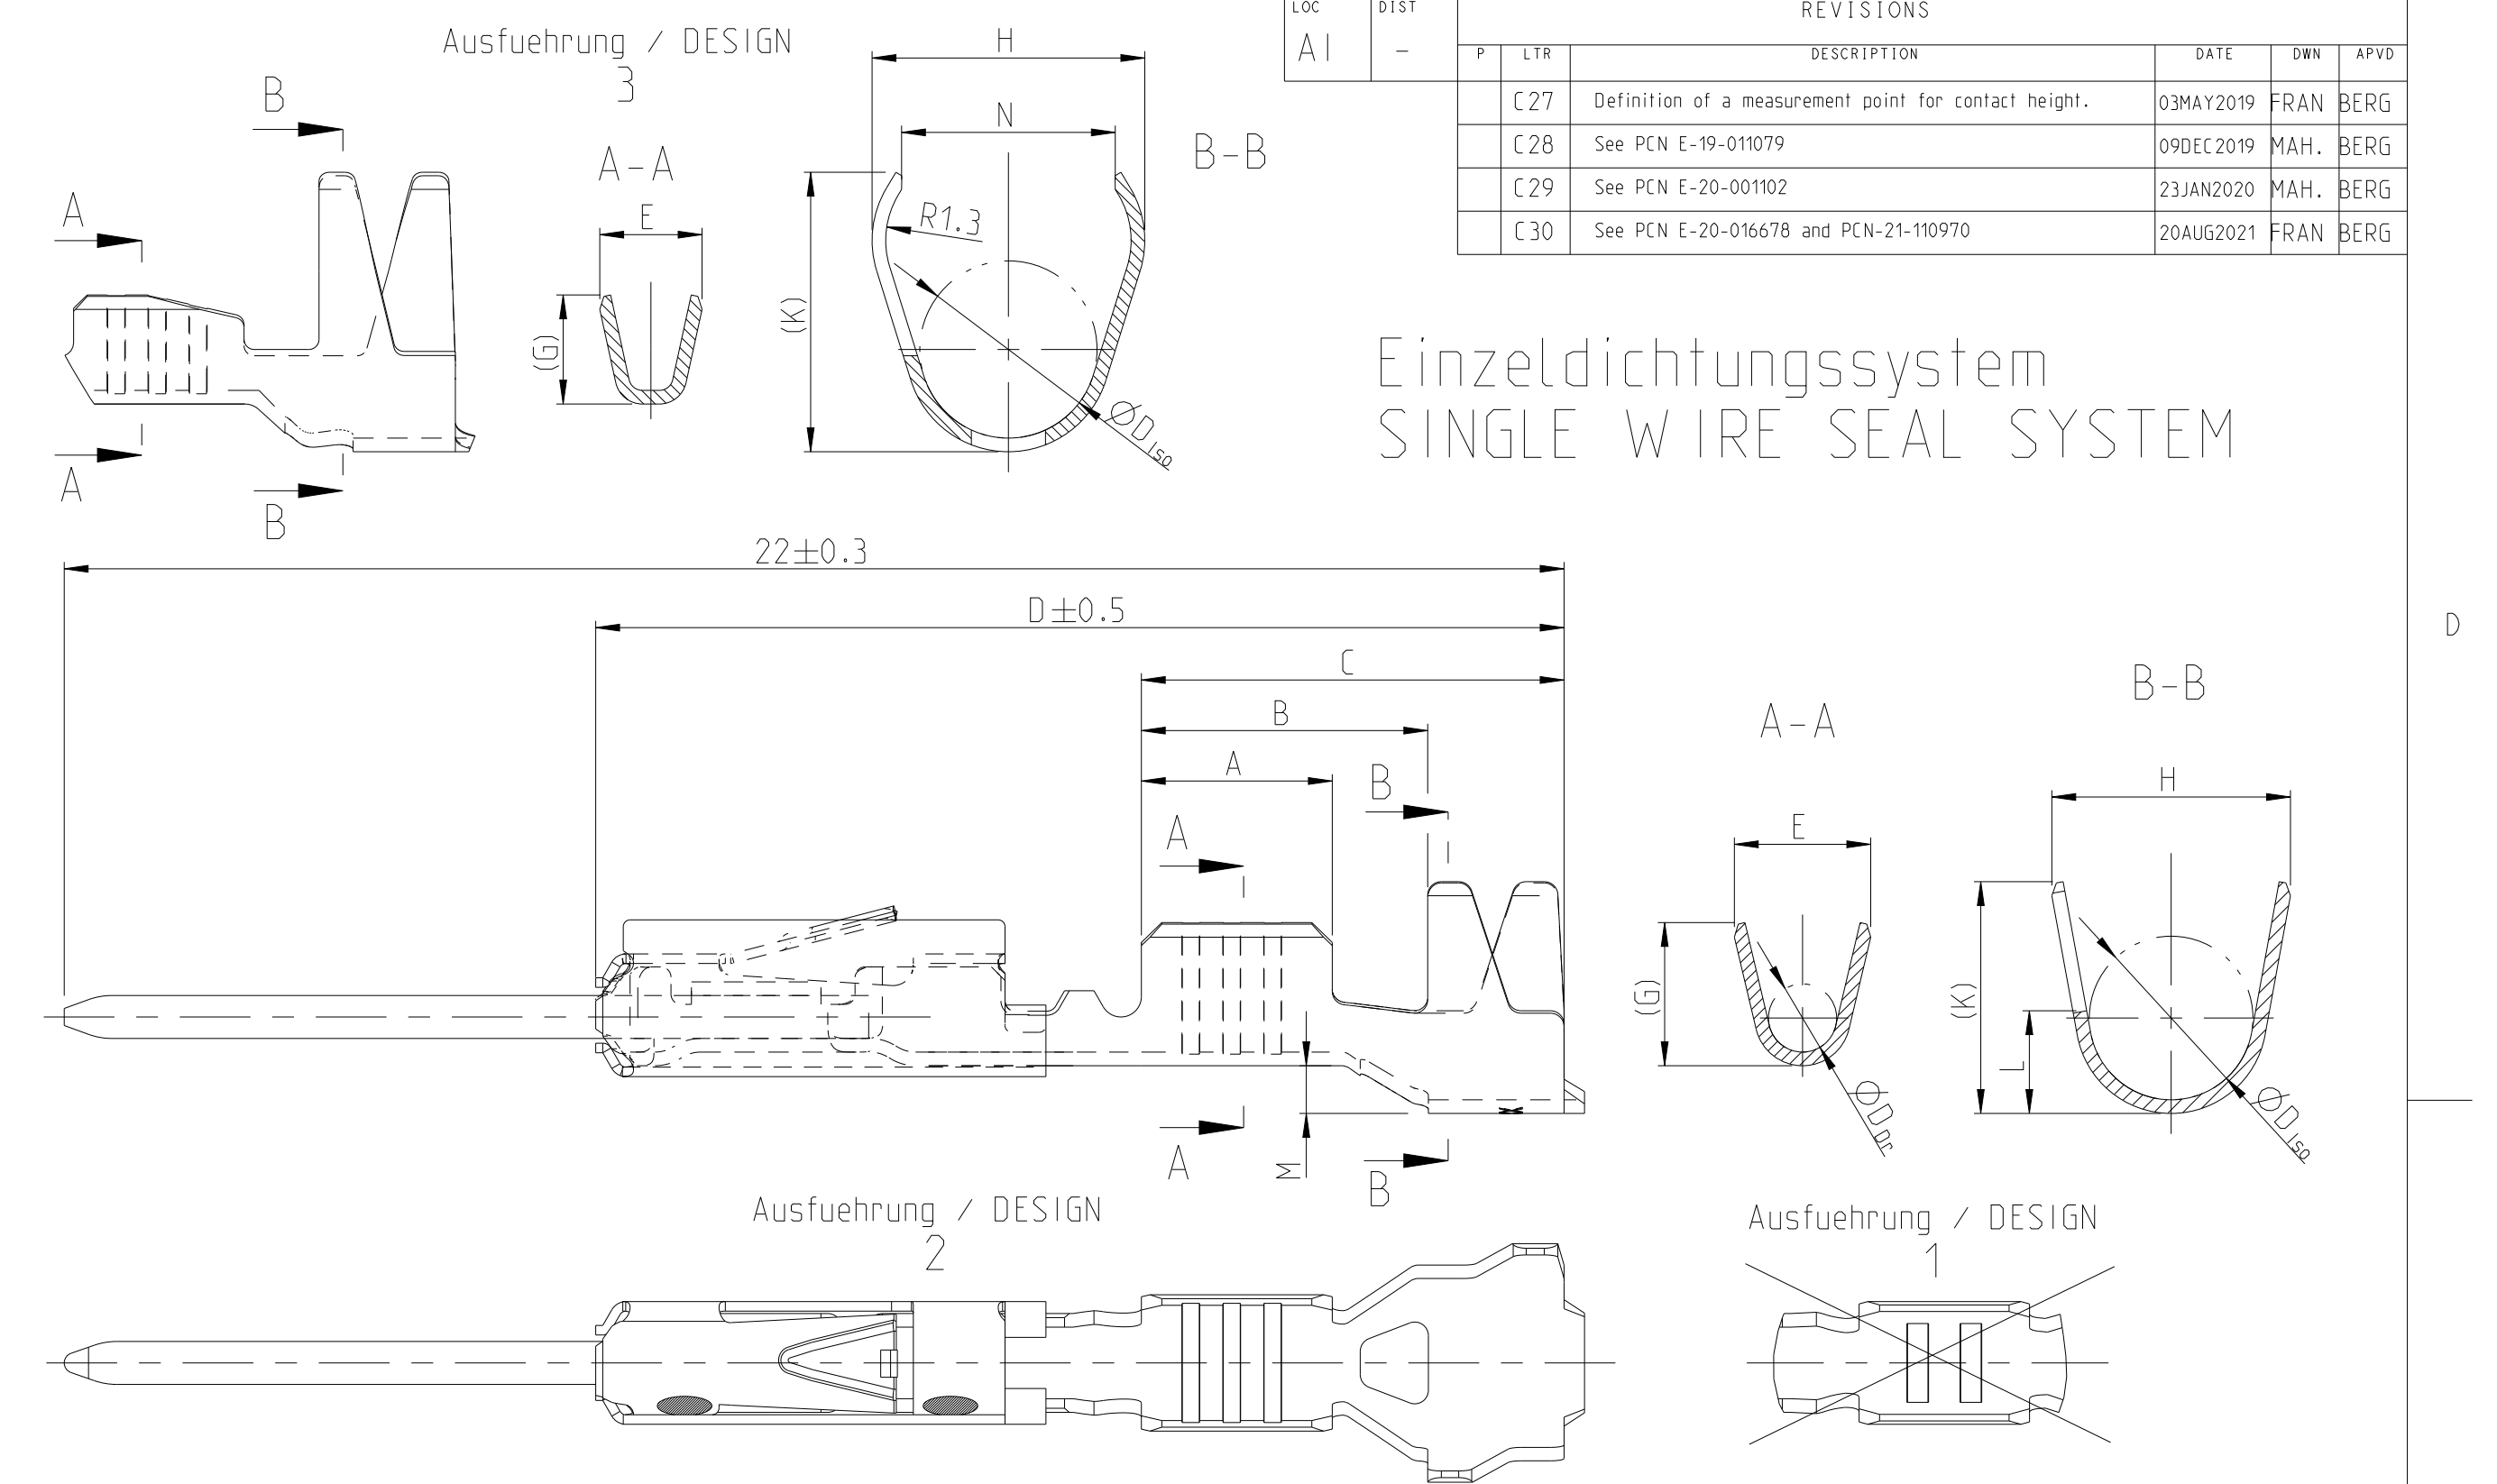


Ausfuehrung ohne Ueberfeder
nur fuer umspritzte Anwendungen
WITHOUT SPRING
ONLY FOR OVERMOLDING

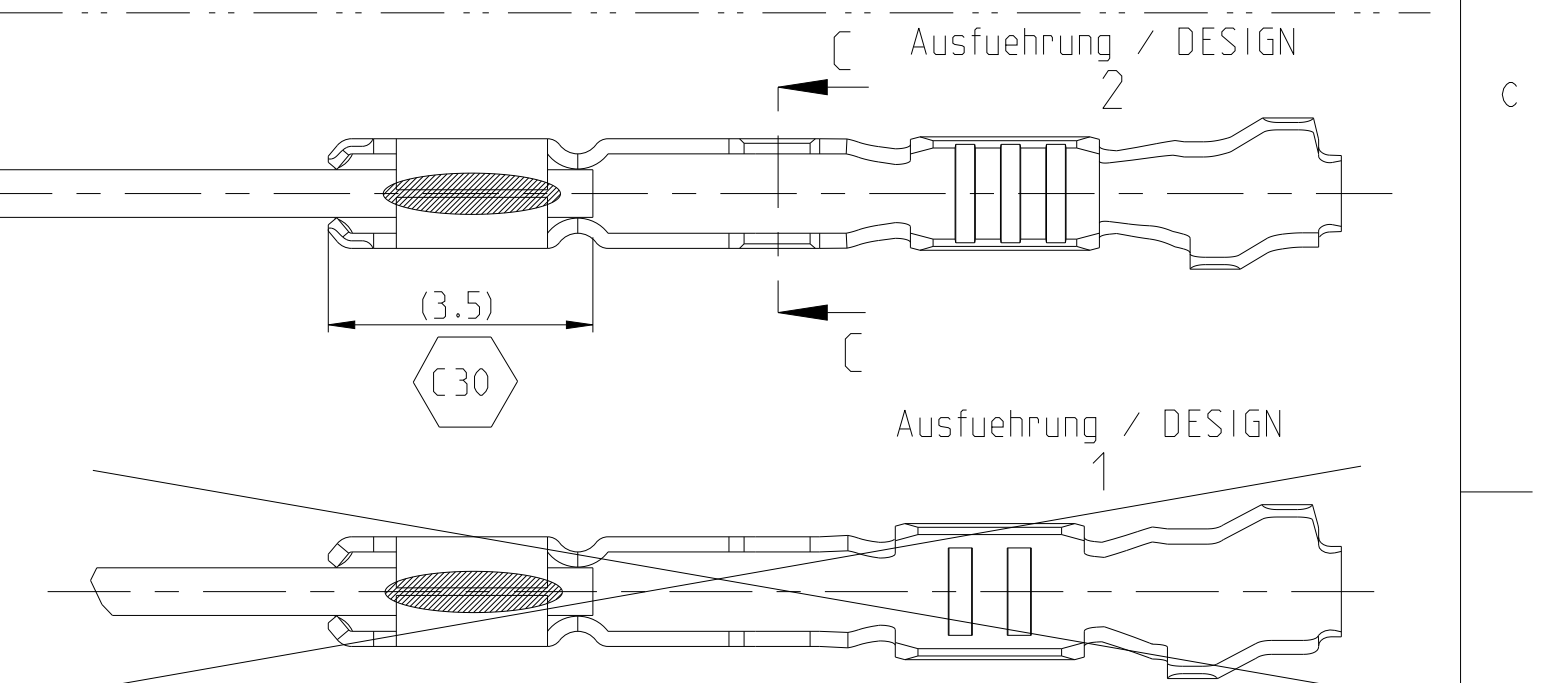

NOTES
Bemerkungen

- 1 Datumscode (Woche/Jahr z.B. KW 38/Jahr 2009)
und TE-Revision (z.B. Rev. A)
DATE CODE (WEEK/YEAR E.G. WEEK NUMBER 38/YEAR 2009)
AND TE REVISION (E.G. REV. A)
- 2 Passend zu Buchsenkontakt siehe Zeichnung 929454
SUITABLE FOR SOCKET CONTACT SEE DRAWING 929454
- 3 Einzelheiten der Ausführung bleiben dem Hersteller überlassen
DETAILS OF DESIGN ARE LEFT TO MANUFACTURER
- 4 Nur für FLR-Leitung nach DIN 72551 Teil 6
FOR FLR-CONDUCTOR ACCORDING TO DIN 72551-6 ONLY
- 5 nicht für Neuanwendung
NOT FOR NEW APPLICATION
- 6 zugverstärkte Leitung nach LV 112-4
REINFORCED WIRE ACCORDING LV 112-4
- 7 Bei doppelt fallenden Werkzeugen wird die erste Überfeder
mit einer Kennzeichnung "—" versehen
WITH DOUBLE OUT DIES THE FIRST SPRING WILL BE PROVIDED
WITH AN INDICATION "--"
- 8 Varianten von Design1 werden durch die entsprechenden
Versionen von Design2 ersetzt
VARIANTS OF DESIGN1 ARE SUPERSEDED BY CORRESPONDING
VERSIONS OF DESIGN2

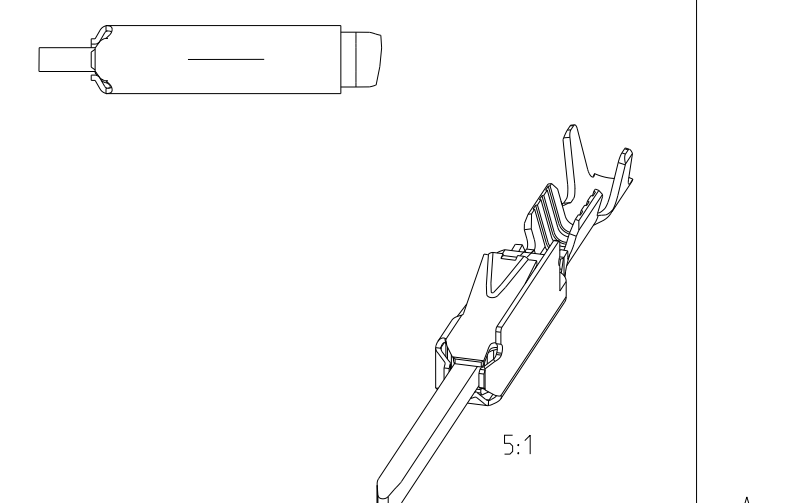

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S.Garcia	06JAN1999							
		CHK R.Jeffert	06JAN1999	STE TE Connectivity						
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME		MQS				
mm				APPROVED M.Bleicher		Tabellenzeichnung Stiftkontakt				
		±0.2		PRODUCT SPEC		TABLE PIN CONTACT				
		±0.2		108-18030						
		±0.2		APPLICATION SPEC						
MATERIAL		FINISH		WEIGHT		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO	
-		-		-		A1	00779	G=929453	-	
CUSTOMER DRAWING						SCALE		10:1	SHEET	1 OF 1
									REV	30