



MAPX	MODIFICATION	DATE



规格型号:Specifications:

电气特性:Electrical:

1. 额定电流: Current Rating
1.5A/contact terminal
2. 额定电压: Voltage Rating
30V DC
3. 接触阻抗: Contact Resistance
30 milliohms MAX
4. 耐电压: Dielectric Withstanding Voltage:
500 V AC AT Sea Level
5. 阻抗: Insulation Resistance:
1000MEGA ohms MIN

物理性能: Mechanical:

1. 插拔力: Connector Mate and Unmate Force
Mate force: 3.57kgf (MAX)
Unmate force: 1.02kgf (MIN)
2. 端子保持力: Terminal Retention
1.0kgf (MIN)

原材料: Material:





1. 塑膠: Housing:
High Temperature Thermoplastics,
PBT/LCP White/Black
2. 端子: Contact: Copper Alloy C2680
3. 外壳: Shell: Copper Alloy C2680/SPCC

1. 端子: Contact: Plated Gold in Mating Area;
Tin On Solder Tails

端子四周镀50U" (MIN) 锡, 镀金区域镀100-200U" 镀金1U"

2. 外壳: Shell:
铜壳四周镀80U" (MIN) 锡

Nickel Plating

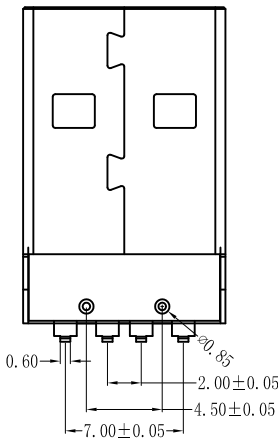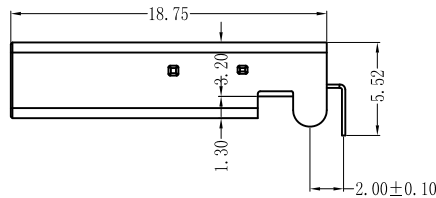

产品图			
PRODUCT CHART DWG			
公差一览表			
TOLERANCE UNLESS OTHERWISE			
X.	±0.25	X.	±5.°
.X	±0.20	.X	±2.°
.XX	±0.15	.XX	±1.°
.XXX	±0.10	.XXX	±0.5°

深圳市精拓金电子有限公司

单位	MM	制图	尹先华	制图料号	917-181A202ED60200
UNITS	MM	DRAWING	尹先华	PRODUCT PART NO.	917-181A202ED60200
比例	1:1	审核	郭治富	产品名称	AM90度短直脚铁壳LCP黑胶有柱24H
SCALE	1:1	CHKD	郭治富	PRODUCT NO.	AM90度短直脚铁壳LCP黑胶有柱24H
日期	2021-04-15	核准	黄国荣	角法	版本
DATE	2021-04-15	APPD	黄国荣	VIEW	VER

