



VDSL CPE SIDE SPLITTER

P/N: VS-2040

Feature





- Design to meet ,UL94v-0.
- Operating temperature: -10°C to+60°C.
- Storage temperature.: -25°C to +75°C.

Electrical Specifications @ 25°C	
Description	LPF
Application	SH/LH
Passband Frequency	DC to 630KHz
Insertion Loss	-1.5dB Max @20K~630KHz
Return Loss	-12dB Min @20K~630KHz
Stopband Frequency	900KHz~7.9MHz
Attenuation	-30dB Min
Impedance	150Ω

Schematic

Mechanical

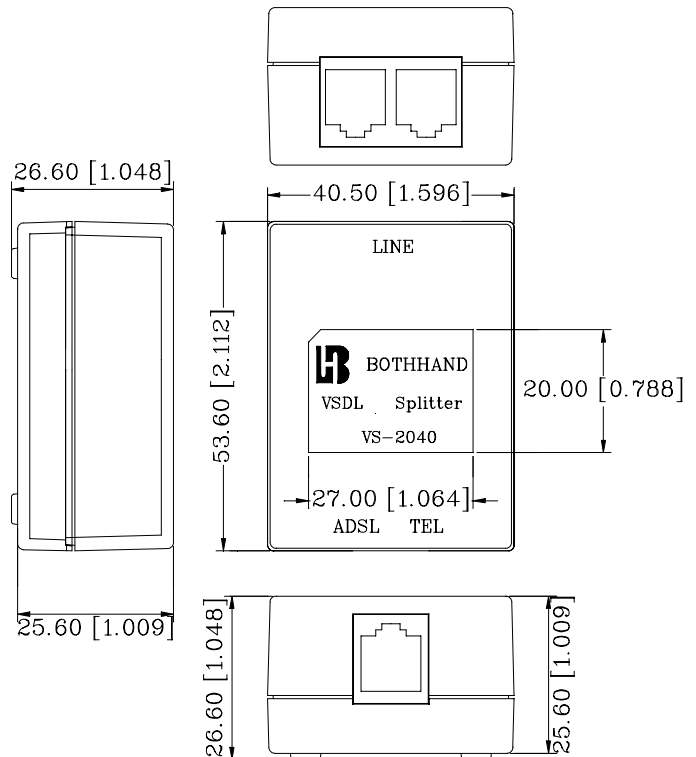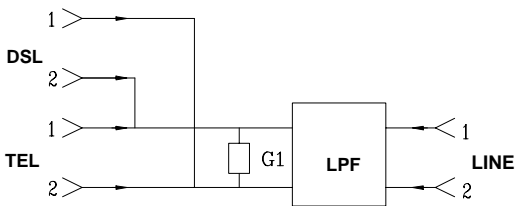

Units: mm[Inches] Tolerances: xx.x0±0.25[0.010]  
 0.xx±0.05[0.002]