

1.27X1.27mm DUAL ROW SOCKET S.M.D. TYPE

(WITH POLARIZATION KEY)




127150FA Series

Mates with SUYIN 127153, 127154, 127157, 127196 Series

Specifications:

- **10-100 Circuits**
- **Insulator material** : Black High Temp . Plastic
- **Max.Processing Temp.** : 230°C for 30 Seconds
- **Terminal Material** : Phosphor Bronze
- **Plating** : Selective Plated (Gold/Tin)
or Full Gold Plated
- **Max. Current Rating** : 1.0A
- **Voltage Rating** : 150V AC
- **Dielectric Strength** : 500V (Min. 60 seconds)

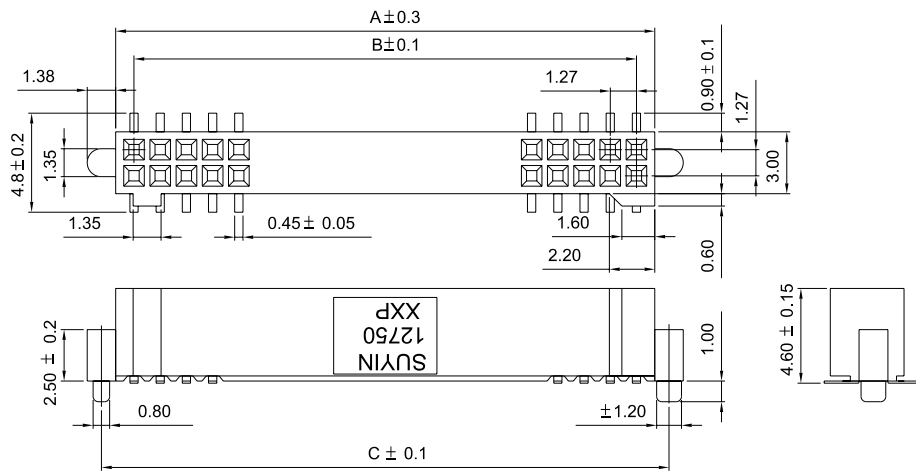

Order Information

127150FA□□□□09Z□
1 2 3 4 5

1. 'A' : Straight SMT Type
2. No. of Pins
3. Plating
4. Color 'Z' : Black
5. Package
 - 'U' : Tube Package Without CAP
 - 'R' : Reel Package With CAP
 - 'T' : Tube Package With CAP

Reference Page 11

Dimensional Information

SUYIN P/NO.	NO. PINS	DIM.A	DIM.B	DIM.C
127150FA010□□09Z□	10	6.75	5.08	8.13
127150FA016□□09Z□	16	10.56	8.89	11.94
127150FA020□□09Z□	20	13.0	11.43	14.48
127150FA024□□09Z□	24	15.64	13.97	17.02
127150FA030□□09Z□	30	19.45	17.78	20.83
127150FA040□□09Z□	40	25.80	24.13	27.18
127150FA044□□09Z□	44	28.34	26.67	29.72
127150FA050□□09Z□	50	32.15	30.48	33.53
127150FA060□□09Z□	60	38.50	36.83	39.88
127150FA068□□09Z□	68	43.58	41.91	44.96
127150FA070□□09Z□	70	44.85	43.18	46.23
127150FA080□□09Z□	80	51.20	49.53	52.58
127150FA090□□09Z□	90	57.55	55.88	58.93
127150FA100□□09Z□	100	63.90	62.23	65.28

Recommended P.C.B. Layout

