

Vectron International**Filter specification****TFS 1709****1/5****Measurement condition**

Ambient temperature:	23	°C
Input power level:	0	dBm
Terminating impedance:		
Input:	50	Ω
Output:	50	Ω

Characteristics

Remark:

The reference level for the relative attenuation a_{rel} of the TFS 1709 is the minimum attenuation in the passband. The maximum attenuation in the passband is defined as the insertion loss a_e . The nominal frequency f_N is fixed at 1709.4 MHz without any tolerance or limit. The values of relative attenuation a_{rel} are guaranteed for the whole operating temperature range. The frequency shift of the filter in the operating temperature range is included in the production tolerance scheme.

D a t a		typ. value		tolerance / limit		
Insertion loss		a_e	4.6 dB	max.	5.0	dB
Nominal frequency		f_N			1709.4	MHz
Passband		PB		f_N ±	30.0	MHz
Passband variation			1.2 dB	max.	1.5	dB
Relative attenuation		a_{rel}				
10	MHz ... 1398.2 MHz		40 dB	min.	35	dB
1398.2	MHz ... 1568.8 MHz		34 dB	min.	14	dB
1859	MHz ... 2020.6 MHz		35 dB	min.	13	dB
2020.6	MHz ... 3000 MHz		29 dB	min.	27	dB
3000	MHz ... 3800 MHz		22 dB	min.	20	dB
Return loss			9 dB	min.	7	dB
Input power level			-	max.	0	dBm
Operating temperature range		OTR	-	- 40 °C ... + 85 °C		
Storage temperature range			-	- 40 °C ... + 85 °C		
Temperature coefficient of frequency		TC_f *	-72 ppm/K			

*) $\Delta f(\text{Hz}) = TC_f(\text{ppm/K}) \times (T - T_0) \times f_{CAT}(\text{MHz})$



Generated:

Checked / Approved:

Vectron International GmbH
Potsdamer Straße 18
D 14 513 TELTOW / Germany
Tel: (+49) 3328 4784-0 / Fax: (+49) 3328 4784-30
E-Mail: tft@vectron.com


Vectron International GmbH reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

Filter characteristic

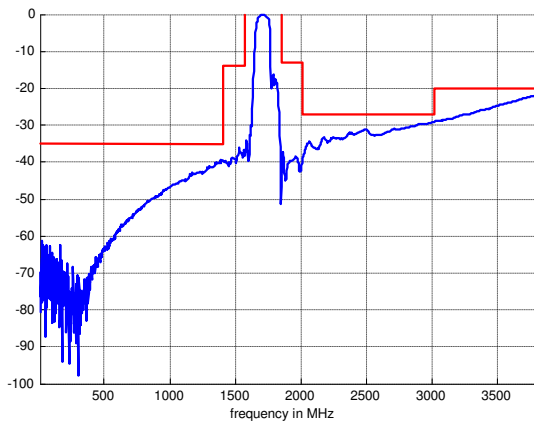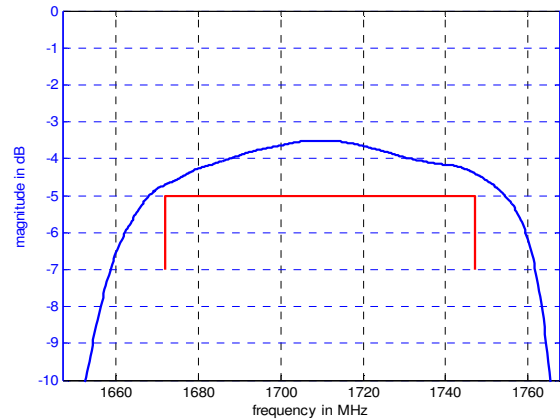


Construction and pin connection

(All dimensions in mm)

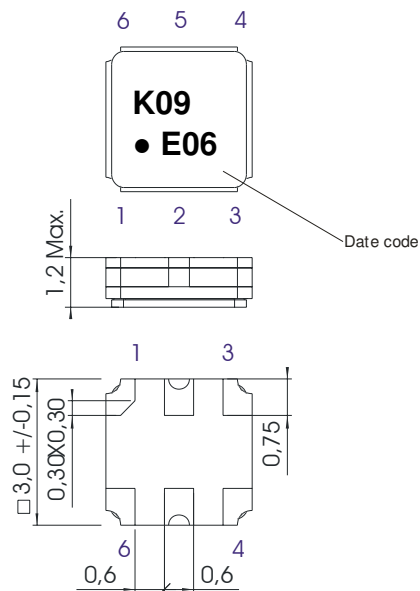

1	Ground
2	Input
3	Ground
4	Ground
5	Output
6	Ground

Date code:	Year + week
E	2014
F	2015
G	2016
...	

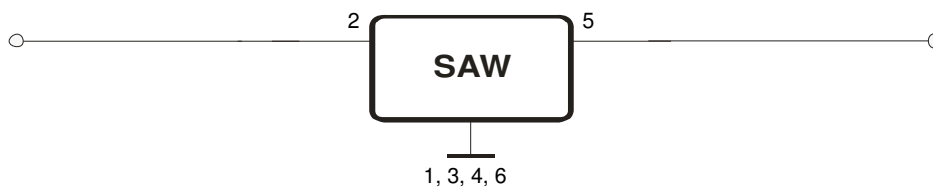50 Ω Test circuit

Vectron International GmbH
 Potsdamer Straße 18
 D 14 513 TELTOW / Germany
 Tel: (+49) 3328 4784-0 / Fax: (+49) 3328 4784-30
 E-Mail: tft@vectron.com

Vectron International GmbH reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

Stability characteristics, reliability

After the following tests the filter shall meet the whole specification:

1. Shock: 500g, 1 ms, half sine wave, 3 shocks each plane;
DIN IEC 68 T2 - 27
2. Vibration: 10 Hz to 500 Hz, 0.35 mm or g respectively, 1 octave per min, 10 cycles per plane, 3 planes; DIN IEC 68 T2 - 6
3. Change of temperature: -55 °C to 125°C / 15 min. each / 100 cycles
DIN IEC 68 part 2 – 14 Test N
4. Resistance to solder heat (reflow): reflow possible: three times max.;
for temperature conditions, see page 4: "Air reflow temperature conditions"

This filter is RoHS compliant (2011/65/EU)


Packing

Tape & Reel: IEC 286 – 3, with exception of value for N and minimum bending radius;
tape type II, embossed carrier tape with top cover tape on the upper side;


max. pieces of filters per reel:	9000
reel of empty components at start:	min. 300 mm
reel of empty components at start including leader:	min. 500 mm
trailer:	min. 300 mm

Tape (all dimensions in mm)

W	: 8,00 ± 0,3
Po	: 4,00 ± 0,1
Do	: 1,50 +0,1/-0
E	: 1,75 ± 0,1
F	: 3,50 ± 0,05
G(min)	: 0,75
P2	: 2,00 ± 0,05
P1	: 4,00 ± 0,1
D1(min)	: 1,50
Ao	: 3,25 ± 0,1
Bo	: 3,25 ± 0,1
Ct	: 5,5 ± 0,1

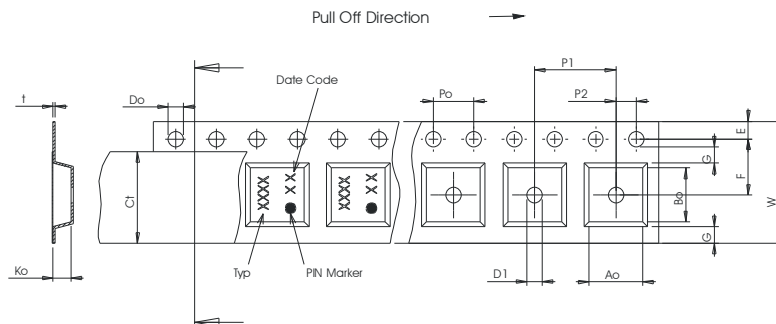**Reel (all dimensions in mm)**

A	: 330
W1	: 8,4 +1,5/-0
W2(max)	: 14,4
N(min)	: 50
C	: 13,0 +0,5/-0,2

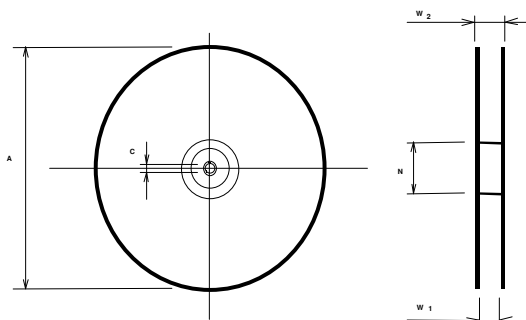


The minimum bending radius is 45 mm.

Vectron International GmbH
Potsdamer Straße 18
D 14 513 TELTOW / Germany
Tel: (+49) 3328 4784-0 / Fax: (+49) 3328 4784-30
E-Mail: tft@vectron.com

Vectron International GmbH reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

Air reflow temperature conditions

Conditions	Exposure
Average ramp-up rate (30°C to 217°C)	less than 3°C/second
> 100°C	between 300 and 600 seconds
> 150°C	between 240 and 500 seconds
> 217°C	between 30 and 150 seconds
Peak temperature	max. 260°C
Time within 5°C of actual peak temperature	between 10 and 30 seconds
Cool-down rate (Peak to 50°C)	less than 6°C/second
Time from 30°C to Peak temperature	no greater than 300 seconds

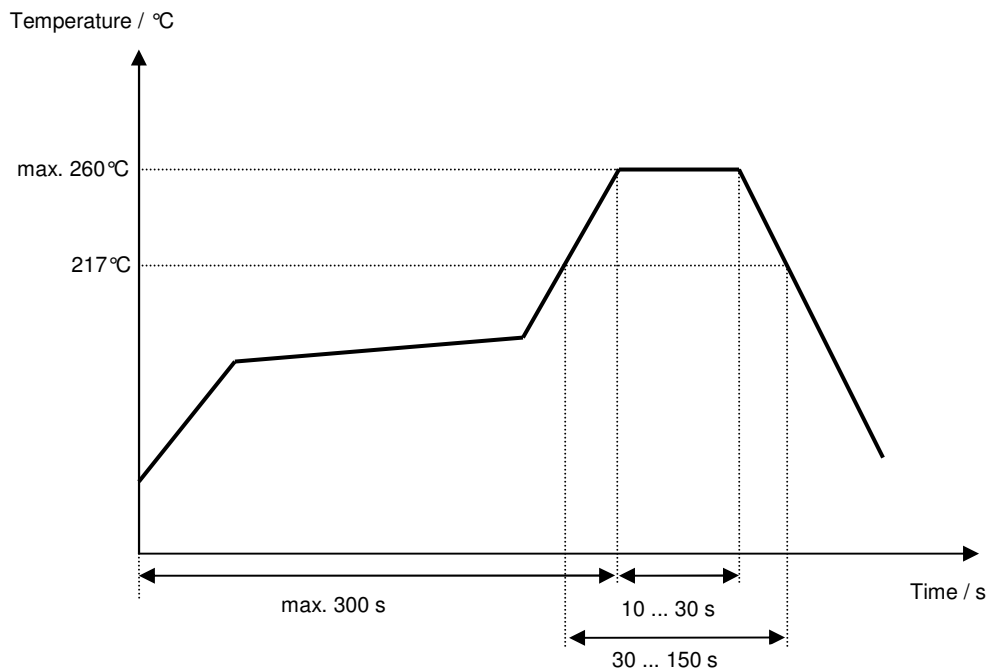Chip-mount air reflow profile

Vectron International**Filter specification****TFS 1709****5/5****History**

Version	Reason of Changes	Name	Date
1.0	- Generation of development specification	Strehl	16.05.2007
1.1	- Change construction	Strehl	18.06.2007
1.2	- Change input power level	Strehl	27.08.2007
1.3	- Generation of filter specification - Add typical values - Add filter characteristic	Noack	02.11.2007
1.4	- Change relative attenuation	Strehl	02.12.2008
1.5	- Maximum input power updated	Kortenbeutel	04.02.2014