


S-RS2MB

Surface Mount Glass Passivated Fast Rectifiers
 Reverse Voltage 1000V Forward Current 2.0A

1. FEATURES

- We declare that the material of product compliance with RoHS requirements and Halogen Free.
- Plastic package has Underwriters Laboratory Flammability Classification 94V-0.
- High temperature metallurgically bonded construction.
- Cavity-free glass passivated junction.
- Capable of meeting environmental standards of MIL-S-19500.
- Fast Switching for high efficiency
- Typical IR less than 1.0µA.
- High temperature soldering guaranteed: 260°C/10 seconds.
- Weight: 0.088g
- S- prefix for automotive and other applications requiring unique site and control change requirements; AEC-Q101 qualified and PPAP capable.

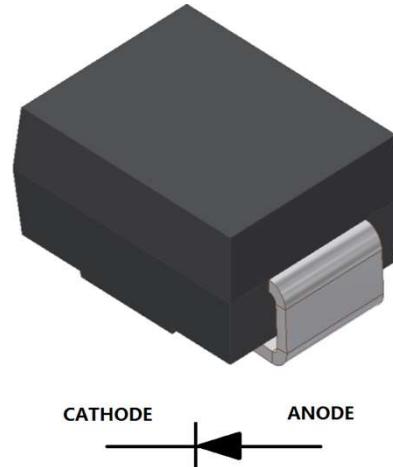

2. DEVICE MARKING AND ORDERING INFORMATION

Device	Marking	Shipping
S-RS2MB	RS2M	3500/Tape&Reel

3. MAXIMUM RATINGS($T_a = 25^\circ\text{C}$)

Parameter	Symbol	Limits	Unit
Maximum repetitive peak reverse voltage	VR _{RM}	1000	V
Maximum RMS voltage	VR _{MS}	700	V
Maximum DC blocking voltage	V _{DC}	1000	V
Maximum average forward rectified current 0.375" (9.5mm) lead length at $T_C = 75^\circ\text{C}$	IF(AV)	2	A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	IF _{SM}	50	A
Typical thermal resistance (Note 1)	R _{θJA}	160	°C/W
	R _{θJC}	50	
Operating junction and storage temperature range	T _J , T _{STG}	-50 ~ +150	°C

4. ELECTRICAL CHARACTERISTICS ($T_a = 25^\circ\text{C}$)

Characteristic	Symbol	Min.	Typ.	Max.	Unit
Maximum instantaneous forward voltage at 2.0A	VF	-	-	1.3	V
Maximum DC reverse current $T_A = 25^\circ\text{C}$ at rated DC blocking voltage $T_J = 125^\circ\text{C}$	IR	-	-	5 100	µA
Typical reverse recovery time (Note 2)	tr _r	-	500	-	ns
Typical junction capacitance at 4.0V, 1MHz	C _J	-	30	-	PF

1. 8.0mm² (.013mm thick) land areas

2. IF = 0.5A, IR = 1.0A, IRR = 0.25A

5. ELECTRICAL CHARACTERISTICS CURVES

Fig. 1 - Forward Current Derating Curve

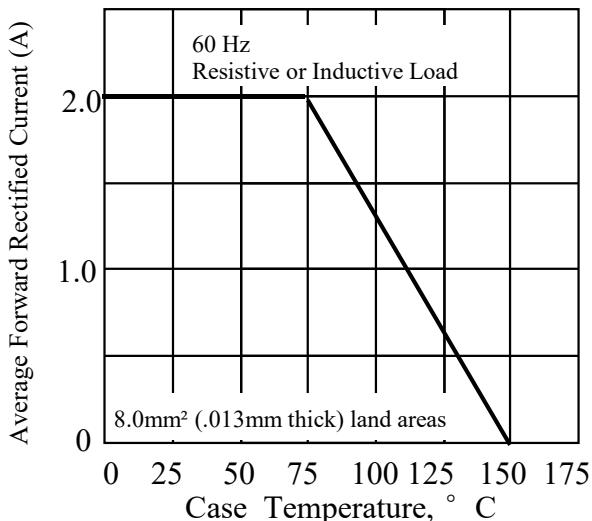


Fig 3. - Typical Instantaneous Forward Characteristics

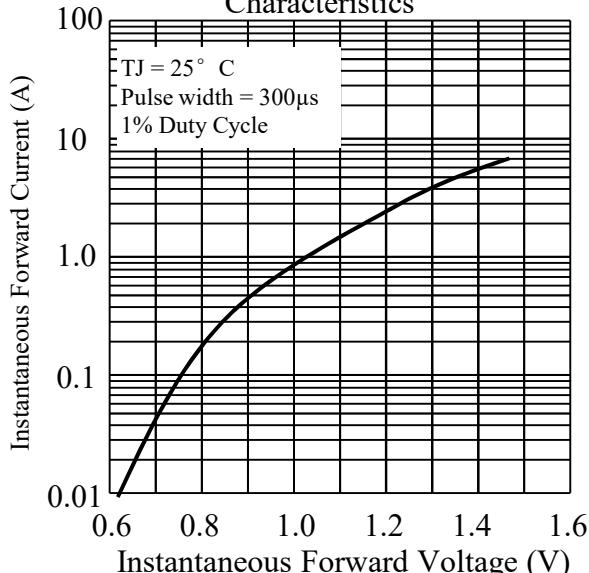


Fig 5. - Typical Junction Capacitance

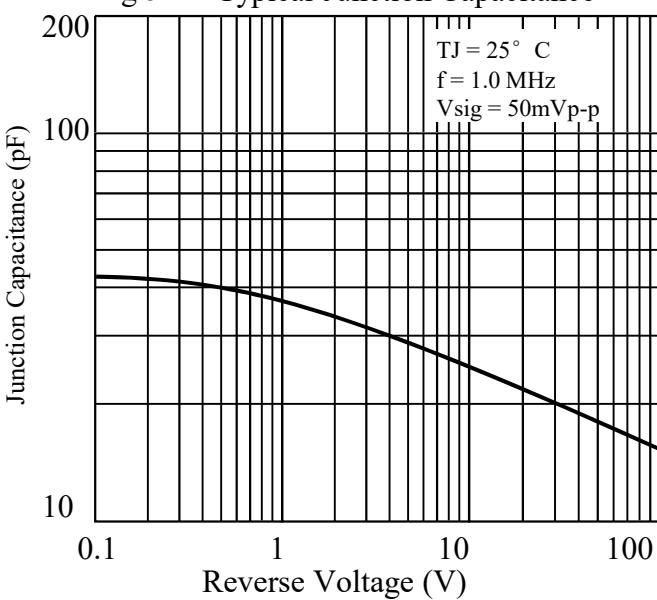


Fig. 2 - Maximum Non-repetitive Peak Forward Surge Current




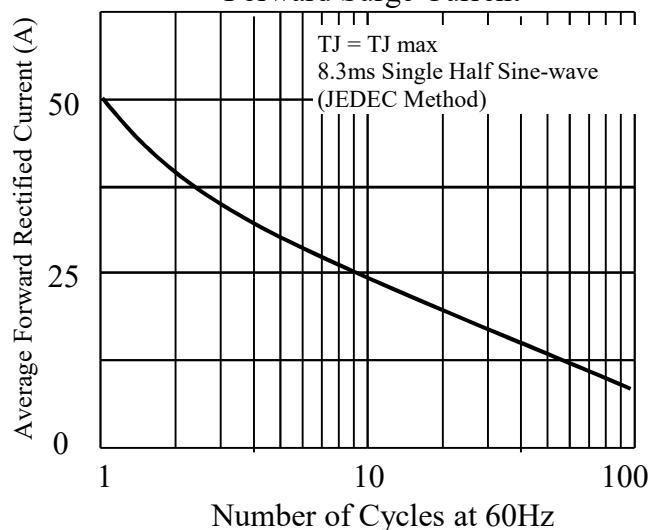


Fig 4. - Typical Reverse Characteristics

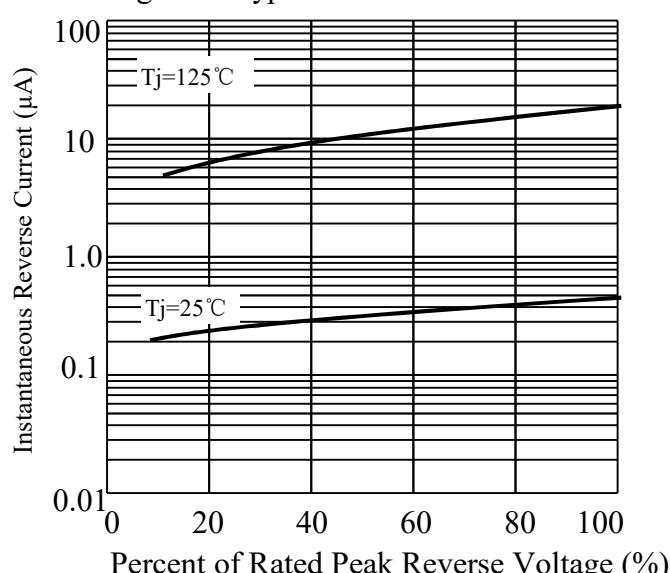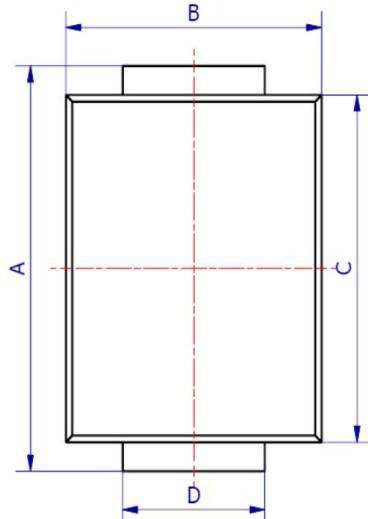


6. OUTLINE AND DIMENSIONS

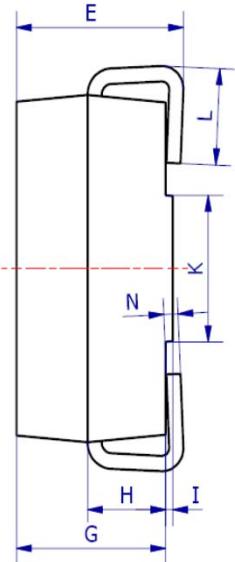

SMB			
DIM	Min	Max	Typ.
A	5.20	5.45	5.25
B	3.20	4.00	3.60
C	4.30	4.60	4.50
D	1.80	2.20	2.00
E	2.20	2.50	2.35
G	1.90	2.30	2.10
H	0.95	1.25	1.10
I	0.05	0.15	0.10
K	1.70	2.10	1.90
L	0.90	1.50	1.20
N	0.10	0.30	0.20

All Dimensions in mm

7. SOLDERING FOOTPRINT

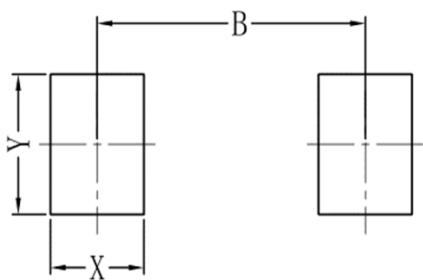

SMB	
DIM	(mm)
X	1.60
Y	2.20
B	4.60