Samwin®

SW15N04V

N-channel Enhanced mode SOP-8/DFN5x6 MOSFET

Features

- High ruggedness
- Low $R_{DS(ON)}$ (Typ 5.8mΩ)@V_{GS}=10V
  (Typ 6.5mΩ)@V_{GS}=4.5V
- Low Gate Charge (Typ 49nC)
- Improved dv/dt Capability
- 100% Avalanche Tested
- Application: DC-DC Converter, Motor Control, Power Supplies

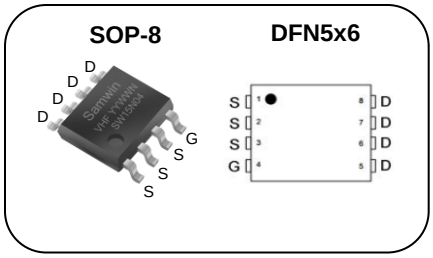

1. Gate 2. Drain 3. Source

BV_{DSS} : 40V
I_D : 15A
$R_{DS(ON)}$: 5.8mΩ@ VGS=10V
6.5mΩ @ VGS=4.5V



General Description

This power MOSFET is produced with advanced technology of SAMWIN.
This technology enable the power MOSFET to have better characteristics, including fast switching time, low on resistance, low gate charge and especially excellent avalanche characteristics.

LEAD-FREE RoHS

Order Codes

Item	Sales Type	Marking	Package	Packaging
1	SW K15N04V	SW15N04V	SOP-8	REEL
2	SW HA15N04V	SW15N04V	DFN5x6	REEL

Absolute maximum ratings

Symbol	Parameter	Value		Unit
		SOP-8	DFN5x6	
V_{DSS}	Drain to source voltage	40		V
I_D	Continuous drain current (@T_C=25°C)	15*		A
	Continuous drain current (@T_C=100°C)	9.5*		A
I_{DM}	Drain current pulsed (note 1)	60		A
V_{GS}	Gate to source voltage	±20		V
E_{AS}	Single pulsed avalanche energy (note 2)	236		mJ
E_{AR}	Repetitive avalanche energy (note 1)	9		mJ
dv/dt	Peak diode recovery dv/dt (note 3)	5		V/ns
P_D	Total power dissipation (@T_C=25°C)	2.60	1.34	W
	Derating factor above 25°C	0.02	0.01	W/°C
T_{STG}, T_J	Operating junction temperature & storage temperature	-55 ~ + 150		°C
T_L	Maximum lead temperature for soldering purpose, 1/8 from case for 5 seconds.	300		°C

*. Drain current is limited by junction temperature.

Thermal characteristics

Symbol	Parameter	Value		Unit
		SOP-8	DFN5x6	
R_{thja}	Thermal resistance, Junction to ambient	48	93	°C/W

Copyright@ SEMIPOWER Electronic Technology Co., Ltd. All rights reserved.

Electrical characteristic (T_C = 25°C unless otherwise specified)

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
Off characteristics						
BV_{DSS}	Drain to source breakdown voltage	V_{GS}=0V, I_D=250uA	40			V
ΔBV_{DSS} / ΔT_J	Breakdown voltage temperature coefficient	I_D=250uA, referenced to 25°C		0.03		V/°C
I_{DSS}	Drain to source leakage current	V_{DS}=40V, V_{GS}=0V			1	uA
		V_{DS}=32V, T_C=125°C			50	uA
I_{GSS}	Gate to source leakage current, forward	V_{GS}=20V, V_{DS}=0V			100	nA
	Gate to source leakage current, reverse	V_{GS}=-20V, V_{DS}=0V			-100	nA
On characteristics						
$V_{GS(TH)}$	Gate threshold voltage	V_{DS}=V_{GS}, I_D=250uA	1.2		2.5	V
$R_{DS(ON)}$	Drain to source on state resistance	V_{GS}=10V, I_D=7.5A		5.8	7	mΩ
		V_{GS}=4.5V, I_D=7.5A		6.5	8.5	mΩ
G_{fs}	Forward transconductance	V_{DS}=10V, I_D=7.5A		41		S
Dynamic characteristics						
C_{iss}	Input capacitance	V_{GS}=0V, V_{DS}=25V, f=1MHz		2460		pF
C_{oss}	Output capacitance			304		
C_{rss}	Reverse transfer capacitance			220		
$t_{d(on)}$	Turn on delay time	V_{DS}=20V, I_D=15A, R_G=25Ω, V_{GS}=10V (note 4,5)		16		ns
t_r	Rising time			95		
$t_{d(off)}$	Turn off delay time			177		
t_f	Fall time			128		
Q_g	Total gate charge	V_{DS}=32V, V_{GS}=10V, I_D=15A (note 4,5)		49		nC
Q_{gs}	Gate-source charge			3		
Q_{gd}	Gate-drain charge			16		
R_g	Gate resistance	V_{DS}=0V, Scan F mode		1.7		Ω

Source to drain diode ratings characteristics

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
I_S	Continuous source current	Integral reverse p-n Junction diode in the MOSFET			15	A
I_{SM}	Pulsed source current				60	A
V_{SD}	Diode forward voltage drop.	I_S=15A, V_{GS}=0V			1.4	V
t_{rr}	Reverse recovery time	I_S=15A, V_{GS}=0V, dI_F/dt=100A/us		22		ns
Q_{rr}	Reverse recovery charge			10		nC

※. Notes

1. Repeatitive rating : pulse width limited by junction temperature.
2. L =2.1mH, I_{AS} =15A, V_{DD} = 50V, R_G=25Ω, Starting T_J = 25°C
3. I_{SD} ≤15A, di/dt = 100A/us, V_{DD} ≤ BV_{DSS}, Staring T_J =25°C
4. Pulse Test : Pulse Width ≤ 300us, duty cycle ≤ 2%
5. Essentially independent of operating temperature.

Copyright@ SEMIPOWER Electronic Technology Co., Ltd. All rights reserved.

Fig. 1. On-state characteristics

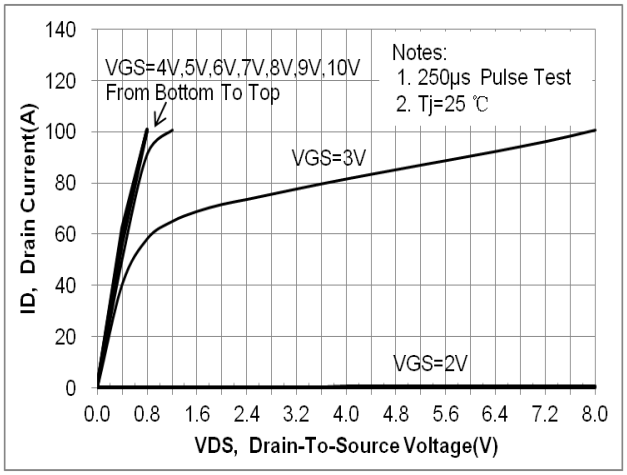

Fig. 2. On-resistance variation vs. drain current and gate voltage

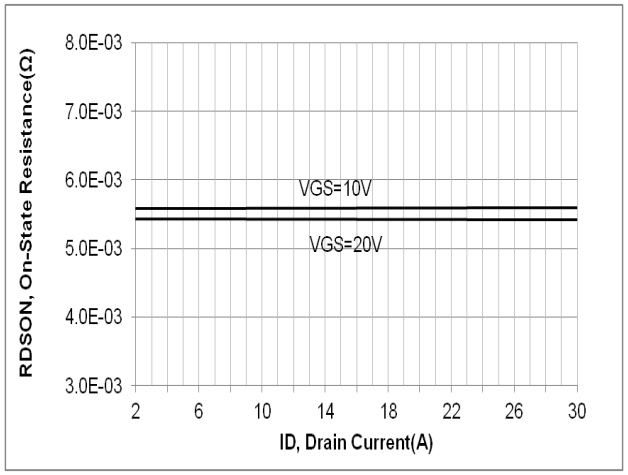

Fig. 3. Gate charge characteristics

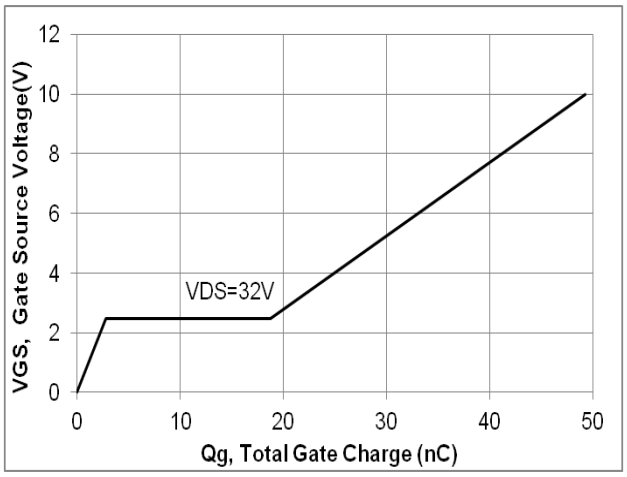

Fig. 4. On state current vs. diode forward voltage

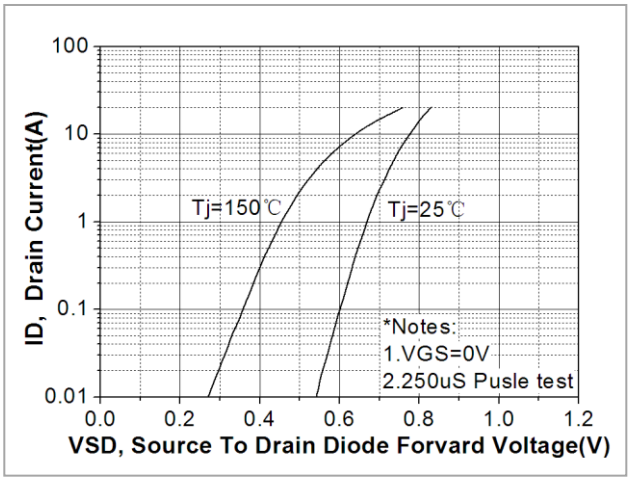

Fig 5. Breakdown Voltage Variation vs. Junction Temperature

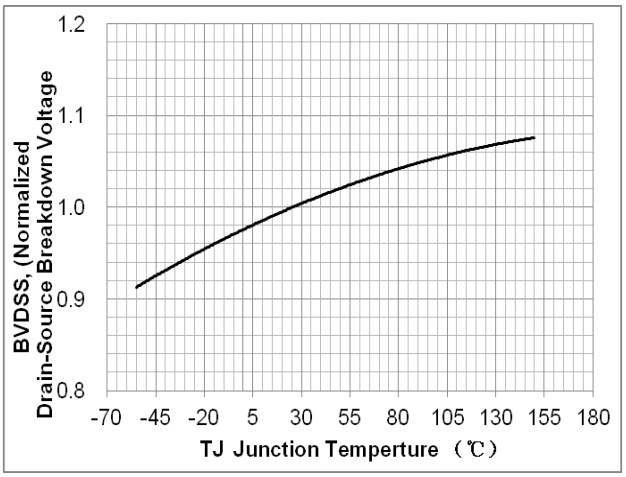

Fig. 6. On resistance variation vs. junction temperature

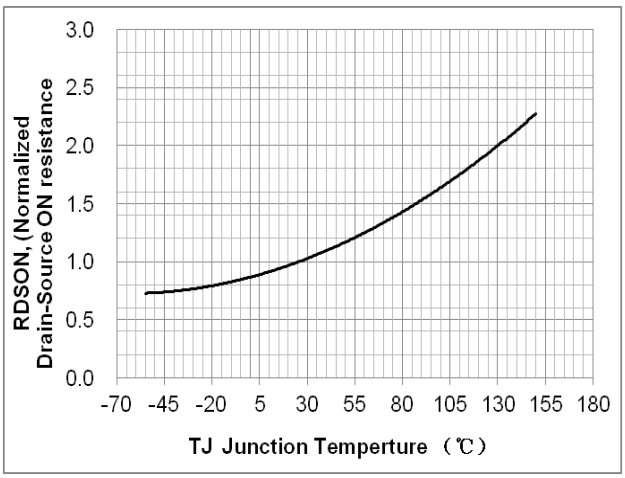

Copyright@ SEMIPOWER Electronic Technology Co., Ltd. All rights reserved.

Fig. 7. Maximum safe operating area（SOP-8）

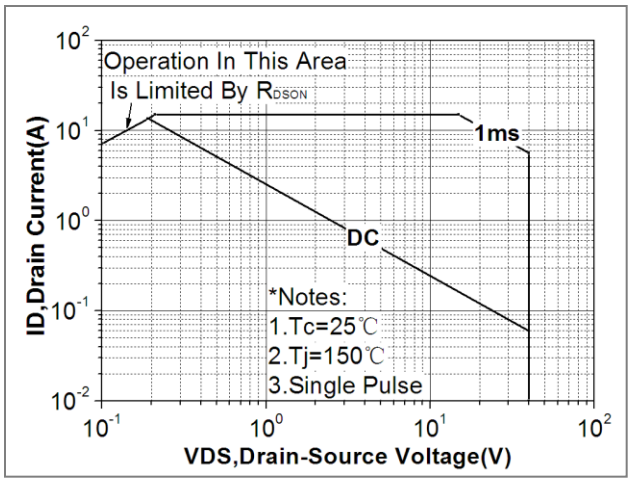

Fig. 8. Maximum safe operating area（DFN5x6）

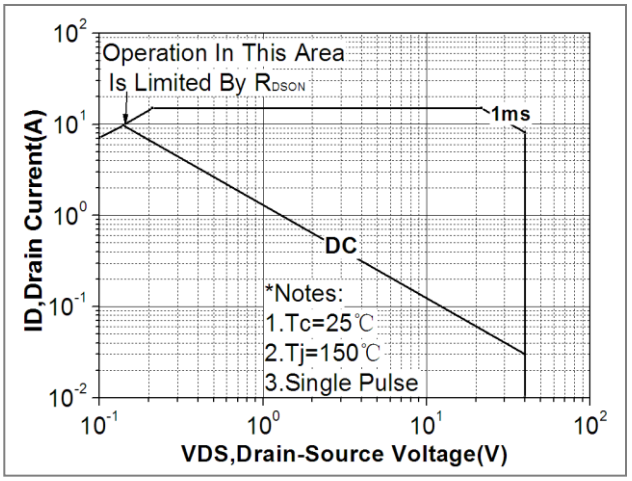

Fig. 9. Capacitance Characteristics

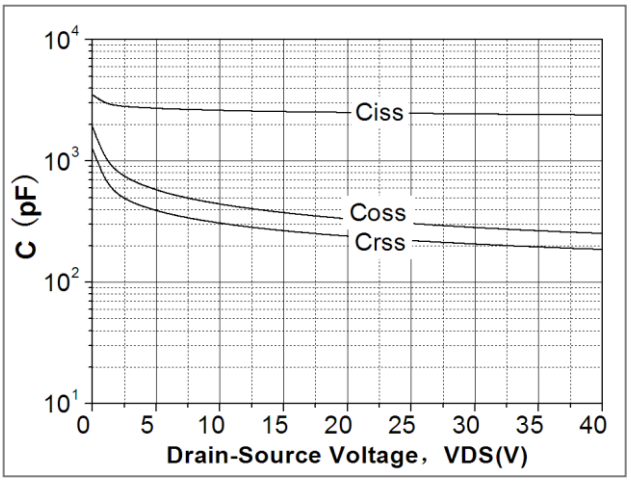

Fig. 10. Transient thermal response curve （SOP-8）

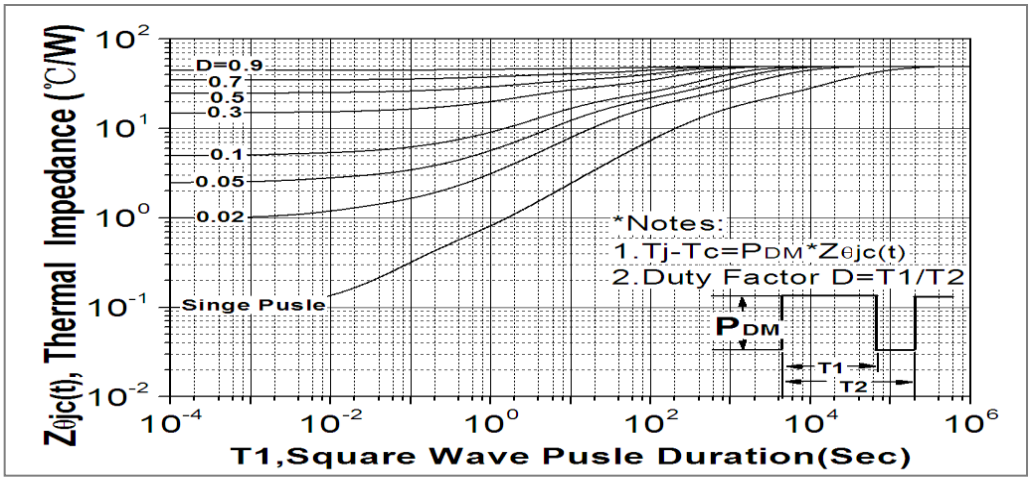

Copyright@ SEMIPOWER Electronic Technology Co., Ltd. All rights reserved.

Fig. 11. Transient thermal response curve （DFN5x6）

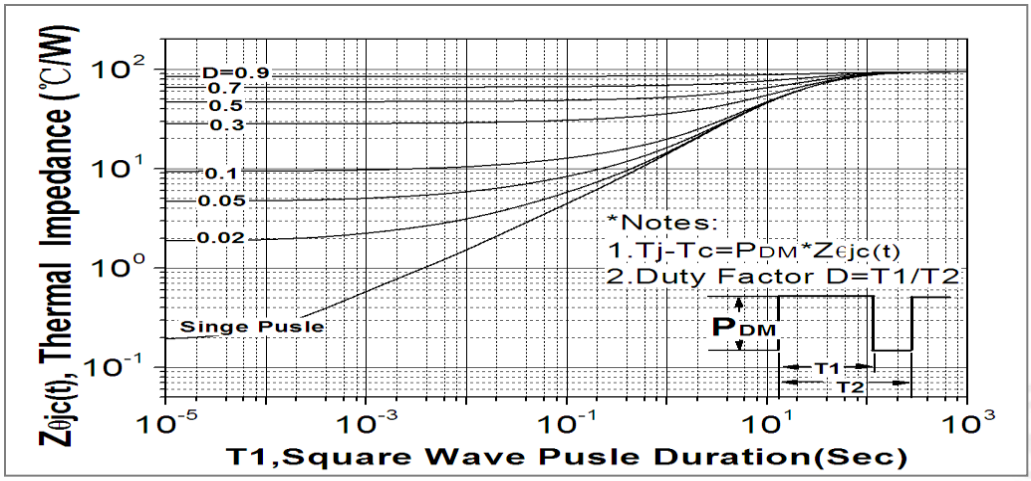

Fig. 12. Gate charge test circuit & waveform

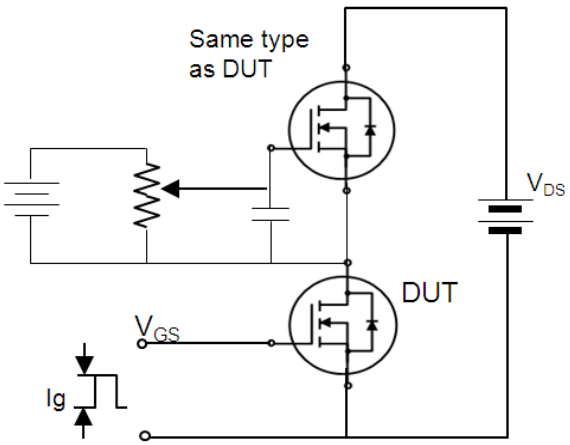

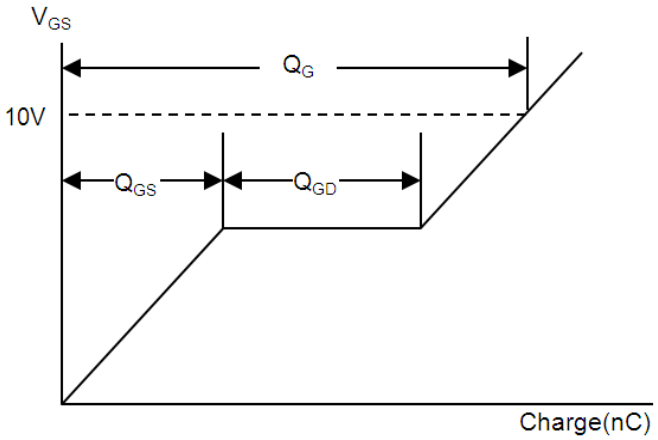

Fig. 13. Switching time test circuit & waveform

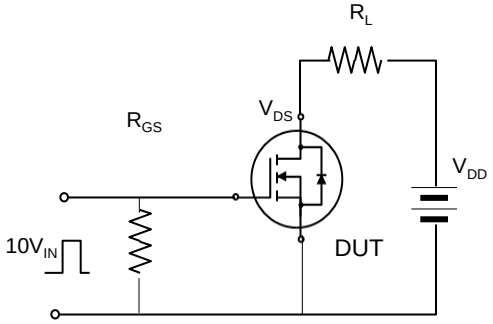

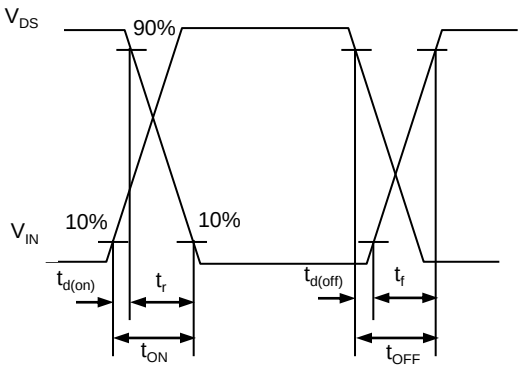

Copyright@ SEMIPOWER Electronic Technology Co., Ltd. All rights reserved.

Fig. 14. Unclamped Inductive switching test circuit & waveform

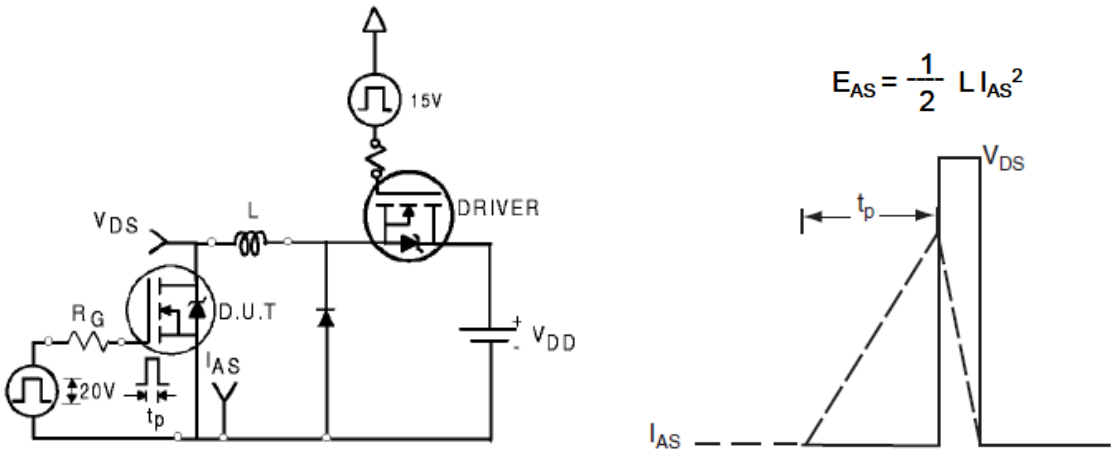

Fig. 15. Peak diode recovery dv/dt test circuit & waveform

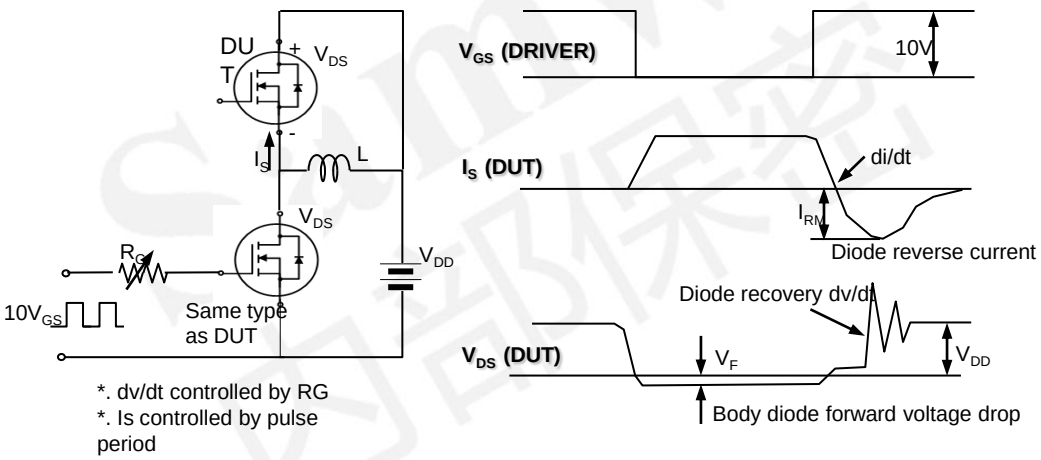

DISCLAIMER

* All the data & curve in this document was tested in XI'AN SEMIPOWER TESTING & APPLICATION CENTER.
* This product has passed the PCT,TC,HTRB,HTGB,HAST,PC and Solderdunk reliability testing.
* Qualification standards can also be found on the Web site (**http://www.semipower.com.cn**)
* Suggestions for improvement are appreciated, Please send your suggestions to **samwin@samwinsemi.com**

Copyright@ SEMIPOWER Electronic Technology Co., Ltd. All rights reserved.