



NOTE  
FACE VIEW ON  
END RECEPTACLE

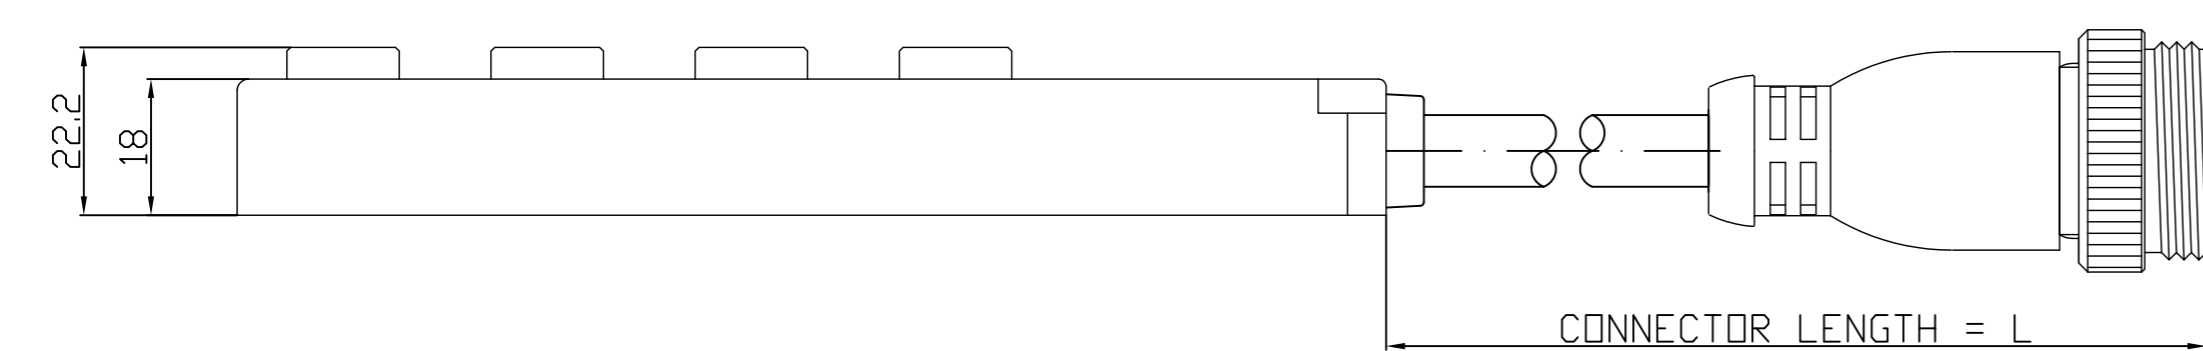

MATERIAL NUMBER	OLD PART NUMBER	FINISHED LENGTH
1201140096	BTY812P-FBP-003	0.3M ± 10
1201140097	BTY812P-FBP-05	5.0M ± 25
1201140098	BTY812P-FBP-10	10.0M ± 30

VOLTAGE RATING	10-30 VDC
AMPERAGE RATING PER PORT	4 AMPS
PROTECTION	IP67
OPERATING TEMPERATURE	-5°C TO 90°C
UL CERTIFICATIONS	UL RECOGNIZED, FILE NO. E46237
CSA CERTIFICATIONS	CSA CERTIFIED, FILE NO. LR6837

ITEM	COMPONENT	MATERIAL	FINISH
1	CONTACT SOCKET	COPPER ALLOY	GOLD OVER NICKEL
2	O-RING	VITON	RED
3	RECEPTACLE SHELL	BRASS	NICKEL PLATED
4	HOUSING	PBT	YELLOW
5	LABEL	ABS	WHITE
6	LENS	NYLON	CLEAR
7	CABLE	PUR	-

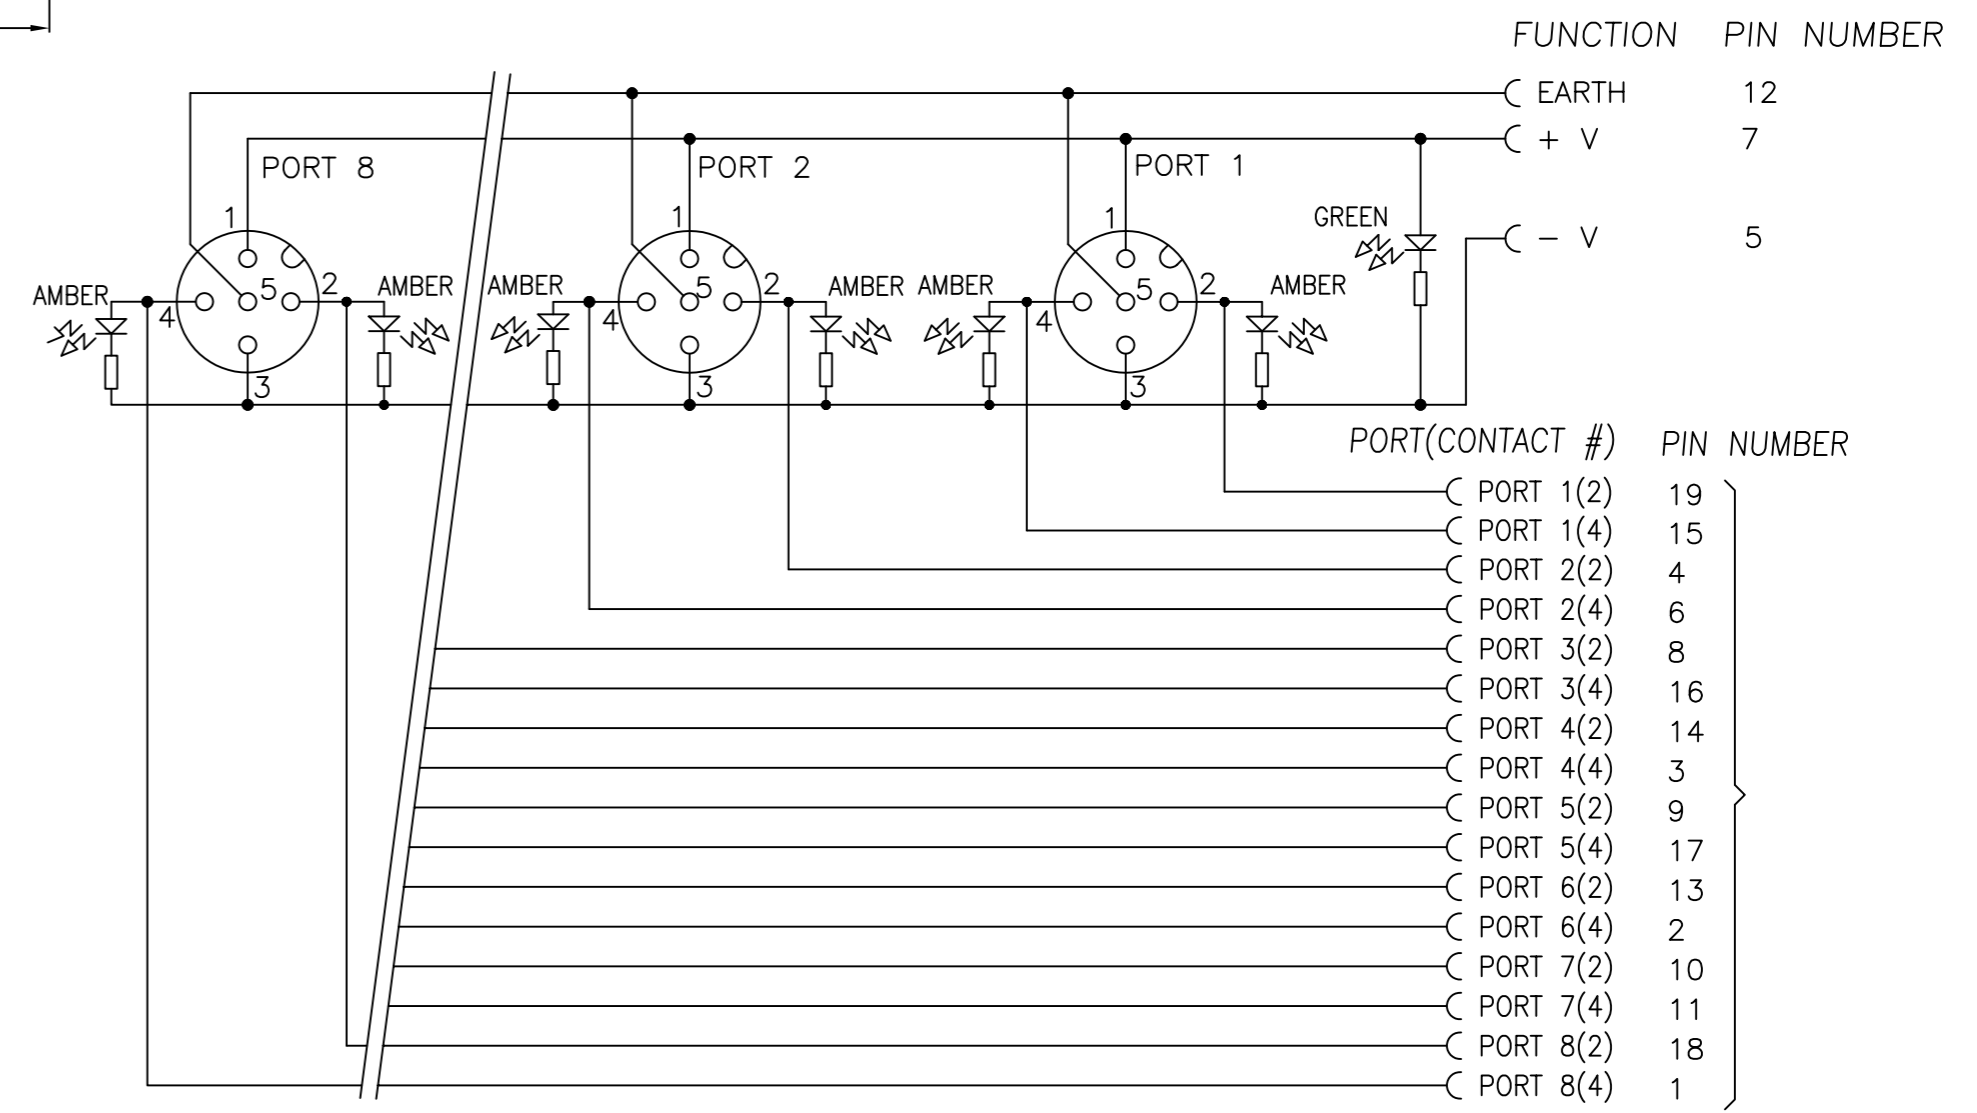

DESCRIPTION EC NO: WEU2010-0451 DRWN: LSTEMMLE 2010/03/22 CHKD: NSTAUDIG APPR: FPACHER 2010/03/23	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION STYLE	SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
	▼ = 0 ◻ = 0	mm    INCH 4 PLACES ± --- ± --- 3 PLACES ± --- ± --- 2 PLACES ± --- ± .01 1 PLACE ± 0.3 ± --- ANGULAR ± --- °	MM ONLY	1:1	METRIC	
1	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	SEE TABLE	DRAWN BY: LSTEMMLE DATE: 2010/03/22 CHECKED BY: FPACHER DATE: 2010/03/22 APPROVED BY: FPACHER DATE: 2010/03/23 MATERIAL NO.:	MICRO-CHANGE MPIS 8 PORT PNP TWIN PORT 5P 19P MM MOULDET CONNECTOR		SHEET NO. 1 OF 1
			Molex		MOLEX INCORPORATED	
			SD-120114-089		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	